

Test Report

Report No.: MG26E3061E

Date: Aug. 21, 2026

Page 1 of 54

CE EMC

For

Product: Portable blender

Model: MO2821

Report No.: MG26E3061E

Issued for

Mid Ocean Brands B.V.

Unit 711-716, 7/F., Tower A, 83 King Lam Street Cheung Sha Wan, Kowloon, Hong Kong

Issued by

Guangdong MG Testing Technology Co., Ltd.

3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China.



Scan to view the original file

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

TABLE OF CONTENTS

1. TEST CERTIFICATION	3
2. TEST SUMMARY	4
3. TEST SITE	5
3.1. TEST FACILITY	5
3.2. MEASUREMENT UNCERTAINTY	5
3.3. LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
4. EUT DESCRIPTION	10
5. TEST METHODOLOGY	11
5.1. TEST MODE	11
5.2. EUT SYSTEM OPERATION	11
6. SETUP OF EQUIPMENT UNDER TEST	12
6.1. DESCRIPTION OF SUPPORT UNITS	12
6.2. CONFIGURATION OF SYSTEM UNDER TEST	12
7. EMISSION TEST	13
7.1. CONDUCTED EMISSION MEASUREMENT	13
7.2. CLICK MEASUREMENT	18
7.3. DISTURBANCE POWER MEASUREMENT	20
7.4. RADIATED EMISSION MEASUREMENT	22
7.5. HARMONICS CURRENT MEASUREMENT	26
7.6. VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT	29
8. IMMUNITY TEST	31
8.1. GENERAL DESCRIPTION	31
8.2. GENERAL PERFORMANCE CRITERIA DESCRIPTION	32
8.3. ELECTROSTATIC DISCHARGE (ESD)	33
8.4. RADIATED RADIO-FREQUENCY, ELECTROMAGNETIC FIELD (RS)	36
8.5. ELECTRICAL FAST TRANSIENT (EFT)	39
8.6. SURGE IMMUNITY TEST	41
8.7. CONDUCTED RADIO FREQUENCY DISTURBANCES (CS)	43
8.8. VOLTAGE DIP & VOLTAGE INTERRUPTIONS	46
9. PHOTOGRAPHS OF THE TEST CONFIGURATION	48
10. PHOTOGRAPHS OF EUT	50

1. TEST CERTIFICATION

Product: Portable blender

Trade mark: N/A

Model: MO2821

Series Model: /

Applicant : Mid Ocean Brands B.V.

Address: Unit 711-716, 7/F., Tower A, 83 King Lam Street Cheung Sha Wan, Kowloon, Hong Kong

Manufacturer: Mid Ocean Brands B.V.

Address: Unit 711-716, 7/F., Tower A, 83 King Lam Street Cheung Sha Wan, Kowloon, Hong Kong

Sample Received Date: May 14, 2026

Test Date: May 14, 2026 to May 20, 2026

Rating: DC 5V by adapter(AC 230V/50Hz) or DC 3.7V by battery

Applicable Standards: EN IEC 55014-1:2021
EN IEC 55014-2:2021
EN IEC 61000-3-2:2019/A2:2024
EN 61000-3-3:2013/A2:2021/AC:2022-01

Remark: /

The above equipment has been tested by Guangdong MG Testing Technology Co., Ltd. and found compliance with the requirements in the technical standards mentioned above. The test results presented in this report only relate to the product/system tested. The Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Test Engineer:

Technical Manager:

Aimee Gao
Aimee Gao / Engineer

Jason Zhan
Jason Zhan / Manager



Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

2. TEST SUMMARY

EMISSION			
Standard	Item	Result	Remarks
EN IEC 55014-1:2021	Conducted (Main Port)	PASS	Complied with limit
	Disturbance Power	N/A	N/A
	Radiated Emission	PASS	Complied with limit
	Click	N/A	N/A
EN IEC 61000-3-2:2019/A2:2024	Harmonic current emissions	PASS	N/A
EN 61000-3-3:2013/A2:2021/AC:2022-01	Voltage fluctuations & flicker	PASS	Complied with limit

IMMUNITY			
Standard	Item	Result	Remarks
EN 61000-4-2:2009	ESD	PASS	Complied with the requirements
EN IEC 61000-4-3:2020	RS	PASS	Complied with the requirements
EN 61000-4-4:2012	EFT	PASS	Complied with the requirements
EN 61000-4-5:2014 +A1:2017	Surge	PASS	Complied with the requirements
EN IEC 61000-4-6:2023	CS	PASS	Complied with the requirements
EN IEC 61000-4-11:2020	Voltage dips & voltage variations	PASS	Complied with the requirements

Note: 1) The test result verdict is decided by the limit of test standard

2) The information of measurement uncertainty is available upon the customer's request.

3) The rated power is less than 75W

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.

This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

3. TEST SITE

3.1. TEST FACILITY

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China.

3.2. MEASUREMENT UNCERTAINTY

Parameter	Uncertainty
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
DC and Low Frequency Voltages	$\pm 3\%$
Conducted Emission(150KHz-30MHz)	$\pm 3.60\text{dB}$
Radiated Emission(30MHz-1GHz)	$\pm 4.76\text{dB}$
Radiated Emission (1GHz-18GHz)	$\pm 4.44\text{dB}$

Note 1: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3.3. LIST OF TEST AND MEASUREMENT INSTRUMENTS

3.3.1. For conducted emission at the mains terminals test

Name of Equipment	Manufacturer	Model	Equipment	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde&Schwarz	ESCI	MG-EL-203	1166.5950.03-101142	Mar. 02, 2026	1 Year
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	MG-EL-201	0357.8810.54-101857-hz	Mar. 02, 2026	1 Year
LISN	Rohde&Schwarz	ENV216	MG-EL-202	3560.6550.12-103020-YU	Mar. 02, 2026	1 Year
Test software	Tonscend	JS32-CE Version 5.0.0				

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

3.3.2. For radiated emission test (30MHz-1GHz)

Name of Equipment	Manufacturer	Model	Equipment	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde&Schwarz	ESCI7	MG-EL-205	1166.5950.03-100633	Mar. 02, 2026	1 Year
Logarithmic periodic antenna	Schwarzbeck	VULB9168	MG-EL-209	01145	Mar. 06, 2025	3 Year
Preamplifier	HP	8447F	MG-EL-210	1-18-53G22	Mar. 02, 2026	1 Year
3m Anechoic Chamber	Taihe MaoRui	9*6*6	MG-EL-234	/	Oct. 09, 2024	5 Year
Test software	Tonscend	JS32-RE Version 5.0.0				

3.3.3. For radiated emission test (1GHz above)

Name of Equipment	Manufacturer	Model	Equipment	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde&Schwarz	ESCI 7	MG-EL-205	1166.5950.03-100633	Mar. 02, 2026	1 Year
Horn antenna	Schwarzbeck	BBHA9120D	MG-EL-239	03083	Mar. 06, 2026	3 Year
Preamplifier	/	1-18-53G22	MG-EL-240	2501020026	Mar. 02, 2026	1 Year
Test software	Tonscend	JS32-RE Version 5.0.0				

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: http://www.mg-lab.cn

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.

This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

3.3.4. For harmonic current emissions and voltage fluctuations/flicker test

Name of Equipment	Manufacturer	Model	Equipment	Serial No.	Last Cal.	Cal. Interval
AC Power Source	California instruments	5001i-400	MG-EL-248	55979	May 16, 2026	1 Year
Harmonic and Flicker Analyzer	California instruments	PACS-1	MG-EL-249	72145	May 16, 2026	1 Year
Test software	California Instruments	CTS 4 Version 4.32.0				

3.3.5. For electrostatic discharge immunity test

Name of Equipment	Manufacturer	Model	Equipment	Serial No.	Last Cal.	Cal. Interval
ESD Tester	PRIMA	ESD61002TB	MG-EL-215	PR9240625796	Mar. 04, 2026	1 Year

3.3.6. For radio frequency electromagnetic field immunity (R/S) test

Name of Equipment	Manufacturer	Model	Equipment	Serial No.	Last Cal.	Cal. Interval
Amplifier	Micotop	MPA-80-1000-250	MG-EL-258	MAP2503096	May 16, 2026	1 Year
Amplifier	Micotop	MPA-1000-6000-100	MG-EL-259	MPA2503098	May 18, 2026	1 Year
Power Meter	Agilent	E4417A	MG-EL-260	GB41293356	May 16, 2026	1 Year
Power Sensor	Agilent	E9304A	MG-EL-261	MY55200008	May 16, 2026	1 Year
Power Sensor	Agilent	E9304A	MG-EL-262	MY55200004	May 16, 2026	1 Year
Signal Generator	ROHDE&SCHWARZ	SMB100A	MG-EL-263	102913	May 16, 2026	1 Year
Log-Per-Broadband Antenna	SKET	STLP 9129 PLUS	MG-EL-264	/	May 19, 2025	3 Year
Audio Analyzer	ROHDE&SCHWARZ	UPP200	MG-EL-267	120175	May 16, 2026	1 Year

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: http://www.mg-lab.cn

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

3.3.7. For electrical fast transient/burst immunity test

Name of Equipment	Manufacturer	Model	Equipment	Serial No.	Last Cal.	Cal. Interval
Fast Transient Burst Simulator	PRIMA	EFT61004TA	MG-EL-218	PR9240743972	Mar. 02, 2026	1 Year
Clamp	PRIMA	PEFT-C105	MG-EL-219	PEFT-1170	Mar. 02, 2026	1 Year

3.3.8. For surge immunity test

Name of Equipment	Manufacturer	Model	Equipment	Serial No.	Last Cal.	Cal. Interval
Lighting Surge Generator	PRIMA	SUG61005TB-2216	MG-EL-217	PR200854619	Mar. 02, 2026	1 Year
Coupling/Decoupling Network	PRIMA	SUG-CDN-108	MG-EL-216	PR924105429	Mar. 02, 2026	1 Year

3.3.9. For injected currents susceptibility test

Name of Equipment	Manufacturer	Model	Equipment	Serial No.	Last Cal.	Cal. Interval
CS Test system	TESEQ	NSG4070	MG-EL-255	30608	May 16, 2026	1 Year
6dB Attenuator	TESEQ	ATN6075	MG-EL-256	30783	May 16, 2026	1 Year
CDN	TESEQ	CDN M016	MG-EL-254	33518	May 16, 2026	1 Year
EM-Clamp	TESEQ	KEMZ 801A	MG-EL-257	33425	May 16, 2026	1 Year

3.3.10. For power frequency magnetic field immunity test

Equipment	Manufacturer	Model	Equipment No.	Serial No.	Last Cal.	Cal.Interval
POWER FREQUENCY MAGNETIC FIELD GENERATION	EVERFINE	EMS61000-8K	MG-EL-273	608002	May 15, 2026	1 Year

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: http://www.mg-lab.cn

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

3.3.11. For voltage dips and short interruptions immunity test

Name of Equipment	Manufacturer	Model	Equipment	Serial No.	Last Cal.	Cal. Interval
Cycle Sag Simulator	PRIMA	DRP61011TB	MG-EL-220	PR924086817	Mar. 02, 2026	1 Year

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.

This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

4. EUT DESCRIPTION

Product	Portable blender
Main Model	MO2821
Supplied Voltage	DC 5V by adapter(AC 230V/50Hz)
Power	--
Accessory	/

I/O PORT

I/O PORT TYPES	Q'TY	TESTED WITH
AC Port	1	☐
DC Port	1	☒

Models Difference

N/A

5. TEST METHODOLOGY

5.1. TEST MODE

The EUT was tested together with the thereafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The following test mode(s) were assessed.

Test Items		Test Mode
Emission	Conducted Emission	Working
	Disturbance Power	N/A
	Radiated Emission	Working
	Click	N/A
	Harmonic current emissions	N/A
	Voltage fluctuations & flicker	Working
Immunity	ESD	Working
	RS	Working
	EFT	Working
	Surge	Working
	C/S	Working
	Dips	Working

5.2. EUT SYSTEM OPERATION

1. Set up EUT with the support equipment.
2. Make sure the EUT work normally during the test.

6. SETUP OF EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1.	Adapter	MDY-EH-12	N/A	N/A	N/A	N/A	N/A

Note: 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.

2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

6.2. CONFIGURATION OF SYSTEM UNDER TEST



(EUT: Portable blender)

7. EMISSION TEST

7.1. CONDUCTED EMISSION MEASUREMENT

7.1.1. LIMITS

Household appliances and equipment causing similar disturbances
and regulation controls incorporation semiconductor devices

FREQUENCY	At mains terminals		At load terminals and additional terminals	
(MHz)	Quasi-peak dB μ V	Average dB μ V	Quasi-peak dB μ V	Average dB μ V
0.15 - 0.5	66-56	59-46	80	70
0.5 - 5.0	56	46	74	64
5.0 - 30.0	60	50	74	64

Mains terminals of tools

FREQUENCY	Rated motor power not exceeding 700W		Rated motor power above 700W and not exceeding 1000W		Rated motor power above 1000W	
	Quasi-peak dB μ V	Average dB μ V	Quasi-peak dB μ V	Average dB μ V	Quasi-peak dB μ V	Average dB μ V
0.15 - 0.35	66-59	59-49	70-63	63-53	79-69	69-59
0.35 - 5.0	59	49	63	53	69	59
5.0 - 30.0	64	54	68	58	74	64

Note: 1) The lower limit shall apply at the transition frequencies.

2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 MHz to 0.5 MHz

7.1.2. TEST PROCEDURES

The EUT and Support equipment, if needed, was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane. When the EUT is floor standing equipment, it is placed on the ground plane, which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane. The EUT should be 0.8 m apart from the AMN, where the mains cable supplied by the manufacturer is longer than 0.8 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, Details please refer to test setup photography.

The Receiver scanned from 9 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.

This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.



Report No.: MG26E3061E

Date: Aug. 21, 2026

Page 14 of 54

A scanning was taken on the power lines, Line and neutral, recording at least six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. The test data of the worst-case condition(s) was recorded. Note: Test Software Name: e3, Software Version: 1.0.0.0.


Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

7.1.3.TEST SETUP

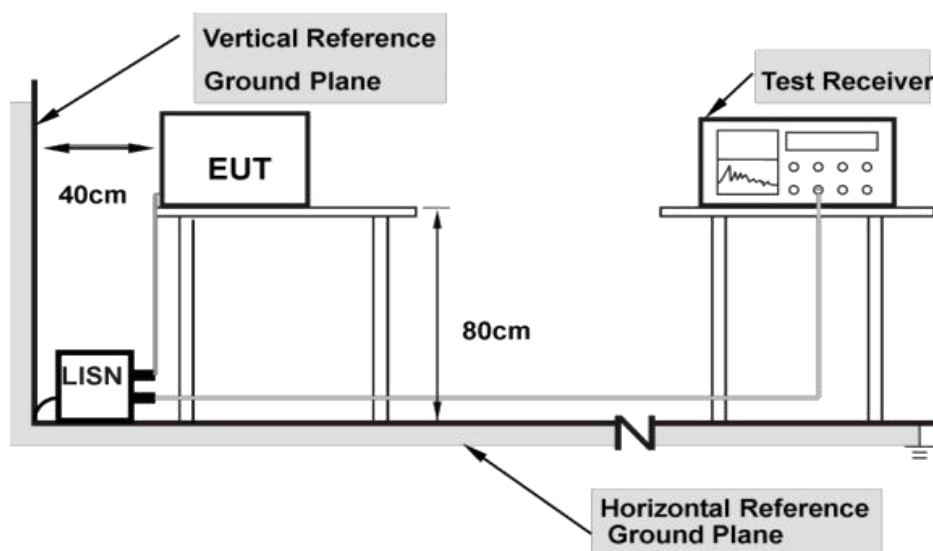

Note: 1.Support units were connected to second LISN.

2.Both of LISNs(AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

7.1.4.TEST RESULT

Product name	Portable blender	Tested By	Brian
Model	MO2821	Detector Function	Peak / Quasi-peak/AV
Test Mode	Working	6 dB Bandwidth	200 Hz/9 kHz
Environmental Conditions	24°C, 54 % RH, 101.1 kPa	Test Result	Pass

Note:

L = Line Line, N = Neutral Line

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = attenuator + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Over Limit (dB) = Level (dBμV) – Limit (dBμV)

QP = Quasi-Peak

AV = Average

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China


Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.

This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

Please refer to the following diagram:

Line:

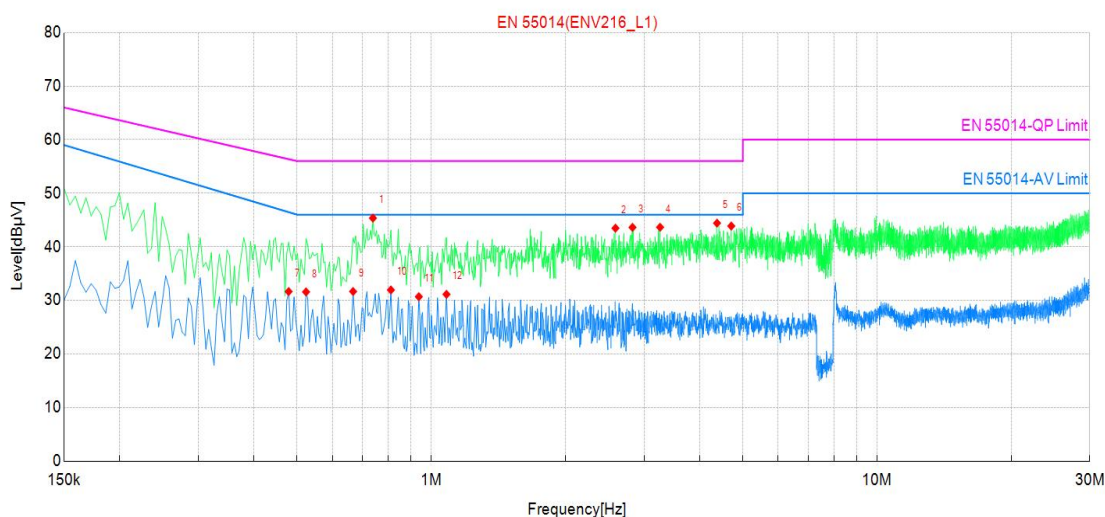

Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Phase	Detector	Verdict
1	0.739500	25.88	45.37	19.49	56.00	10.63	L1	QP	PASS
2	2.589000	24.08	43.48	19.40	56.00	12.52	L1	QP	PASS
3	2.827500	24.23	43.63	19.40	56.00	12.37	L1	QP	PASS
4	3.259500	24.25	43.65	19.40	56.00	12.35	L1	QP	PASS
5	4.375500	25.03	44.42	19.39	56.00	11.58	L1	QP	PASS
6	4.708500	24.50	43.88	19.38	56.00	12.12	L1	QP	PASS
7	0.478500	12.34	31.65	19.31	46.47	14.82	L1	AV	PASS
8	0.523500	12.27	31.59	19.32	46.00	14.41	L1	AV	PASS
9	0.667500	12.19	31.66	19.47	46.00	14.34	L1	AV	PASS
10	0.811500	12.49	31.95	19.46	46.00	14.05	L1	AV	PASS
11	0.937500	11.27	30.69	19.42	46.00	15.31	L1	AV	PASS
12	1.081500	11.73	31.13	19.40	46.00	14.87	L1	AV	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Guangdong MG Testing Technology Co., Ltd.


Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.

This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

Neutral:

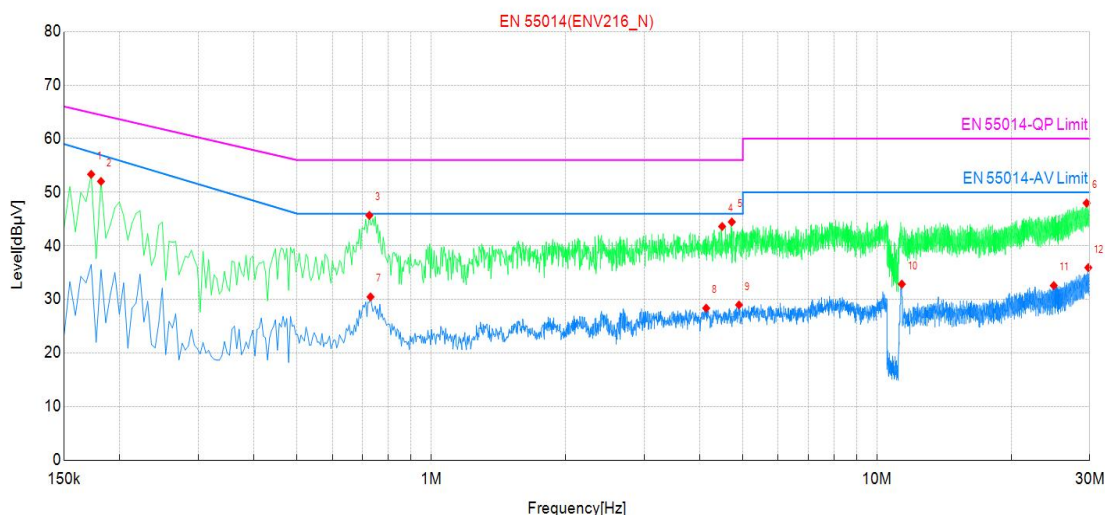

Suspected Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Phase	Detector	Verdict
1	0.172500	33.95	53.35	19.40	64.84	11.49	N	QP	PASS
2	0.181500	32.63	52.03	19.40	64.42	12.39	N	QP	PASS
3	0.726000	26.19	45.68	19.49	56.00	10.32	N	QP	PASS
4	4.492500	24.28	43.61	19.33	56.00	12.39	N	QP	PASS
5	4.722000	25.11	44.46	19.35	56.00	11.54	N	QP	PASS
6	29.530500	28.29	47.98	19.69	60.00	12.02	N	QP	PASS
7	0.730500	10.97	30.46	19.49	46.00	15.54	N	AV	PASS
8	4.137000	9.05	28.36	19.31	46.00	17.64	N	AV	PASS
9	4.902000	9.61	28.97	19.36	46.00	17.03	N	AV	PASS
10	11.368500	13.48	32.85	19.37	50.00	17.15	N	AV	PASS
11	24.918000	13.03	32.58	19.55	50.00	17.42	N	AV	PASS
12	29.787000	16.25	35.94	19.69	50.00	14.06	N	AV	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

7.2. CLICK MEASUREMENT

7.2.1. LIMITS

The click limit L_q is determined from the formula:

$$L_q = L + \Delta L$$

which the limits L for continuous disturbance shall be increased (see table 1):

which corresponding to the click rate N shall be calculated the amount ΔL by

$$\Delta L = 44 \text{ dB for } N < 0,2$$

$$\Delta L = [20 \log(30/N)] \text{ dB for } 0,2 \leq N < 30$$

Table 1

FREQUENCY (MHz)	At mains terminals		At load terminals and additional terminals	
	Quasi-peak dB μ V	Average dB μ V	Quasi-peak dB μ V	Average dB μ V
0.15 - 0.5	66-56	59-46	80	70
0.5 - 5.0	56	46	74	64
5.0 - 30.0	60	50	74	64

7.2.2. TEST PROCEDURE

The EUT and Support equipment, if needed, was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane. When the EUT is floor standing equipment, it is placed on the ground plane, which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane. The EUT should be 0.8 m apart from the AMN, where the mains cable supplied by the manufacturer is longer than 1m, the excess should be folded at the centre into a bundle no longer than 0.4 m, Details please refer to test setup photography.


At first, determining N by measuring the Clicks, calculating the limit.

Then, use the Upper quartile method to confirm EUT is fulfilled the requirement of standard or not.

The amplitude of the clicks shall be evaluated only at the following restricted number of frequencies: 150 kHz; 500 kHz; 1.4 MHz and 30 MHz

Note: Test Software Name: e3, Software Version: 1.0.0.0.

7.2.3. TEST SETUP

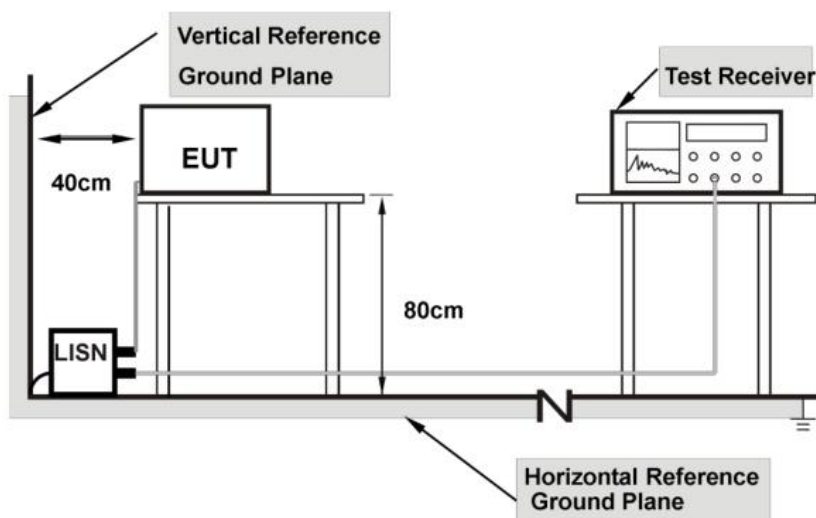

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

7.2.4. TEST RESULT

This test is not applicable because the EUT does not have the relative function.

7.3. ***DISTURBANCE POWER MEASUREMENT***

7.3.1. LIMITS

FREQUENCY (MHz)	Household appliances and similar appliances		Rated motor power not exceeding 700W		Rated motor power above 700W and not exceeding 1000W		Rated motor power above 1000W	
	QP dBpW	Average dBpW	QP dBpW	Average dBpW	QP dBpW	Average dBpW	QP dBpW	Average dBpW
30 ~ 300	45-55	35-45	45-55	35-45	49-59	39-49	55-65	45-55

Note: 1) The lower limit shall apply at the transition frequencies.

2) Increasing linearly with the frequency.

3) QP means Quasi-peak, AV means Average.

4) The limit of column 2 and 3 apply to this product.

7.3.2. TEST PROCEDURE

The EUT is place on a 0.8 meters height wooden table above the ground plane, and kept at least 0.8 m from other metallic object. The straight portion of lead would put on 6 m long testing bench of (if lead is shorter than 6 m it should be extended)


Any lead connecting the main appliance to an auxiliary apparatus is disconnected if this does not affect the operation of the appliance, or is isolated by means of ferrite rings (or an absorbing clamp) close to the appliance.

The receiver scanned from 30 MHz to 300 MHz. Emissions were scanned and measured to moving the absorbing clamp along the main lead until the maximum emission value is found. Recorded at least the six highest emissions.

The test data of the worst-case condition(s) was recorded.

Note: Test Software Name: e3, Software Version: 1.0.0.0.

7.3.3. TEST SETUP

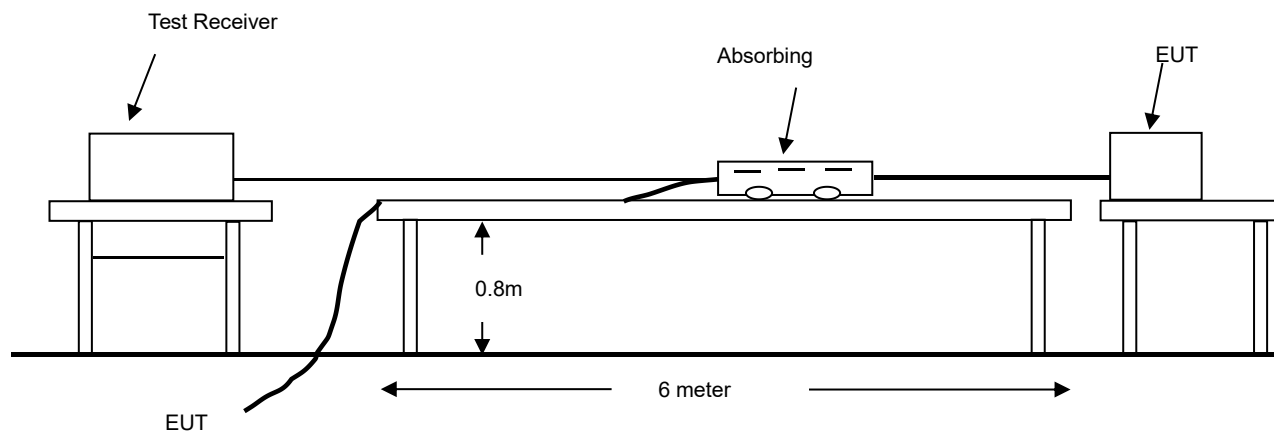

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

7.3.4. TEST RESULT

N/A

7.4. **RADIATED EMISSION MEASUREMENT**

7.4.1. LIMITS

FREQUENCY (MHz)	Limit (dBμV/m) (At 3m)
30 ~ 230	40
230 ~ 1000	47

Note: 1) The lower limit shall apply at the transition frequencies.

2) Emission level (dBμV/m) = 20 log Emission level (μV/m).

7.4.2. TEST PROCEDURE

The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is floor standing equipment, it is placed on the ground plane which has a 0.1 m non-conductive covering to insulate the EUT from the ground plane.

The antenna was placed at 3 meter away from the EUT. The antenna connected to the spectrum analyzer via a cable and at times a pre-amplifier would be used.


The analyzer / receiver quickly scanned from 30 MHz to 1000 MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

During the above scans, the emissions were maximized by cable manipulation. Each modes is measured, recorded at least the six highest emissions. The emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.

The test data of the worst-case condition(s) was recorded.

Note: Test Software Name: e3, Software Version: 8.2.1.0.

7.4.3. TEST SETUP

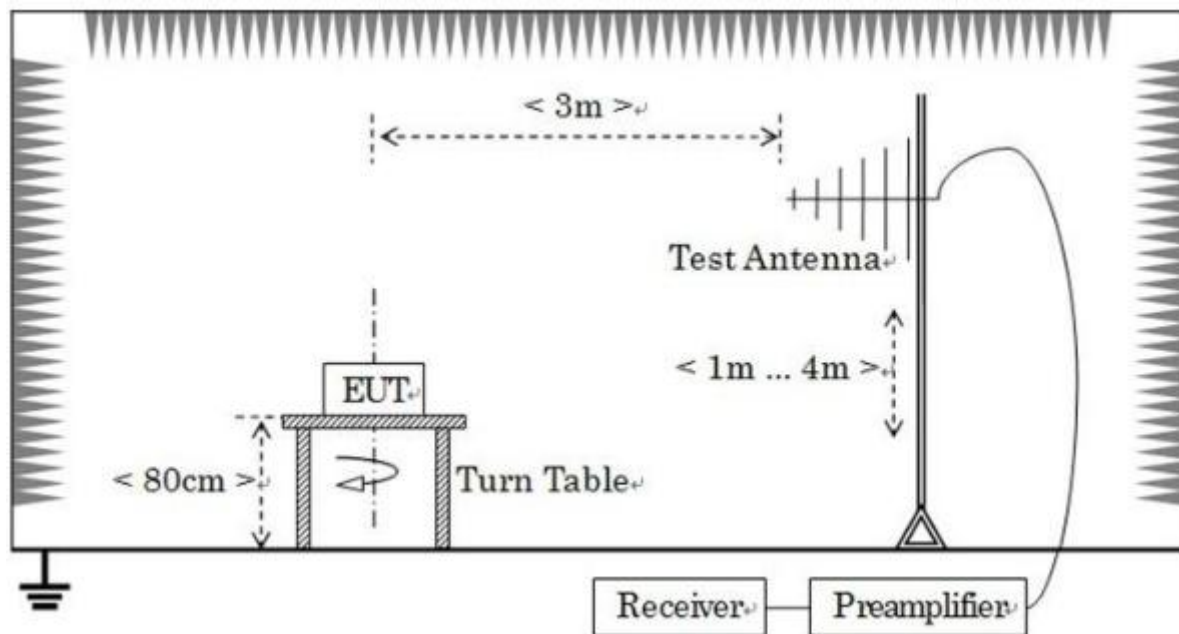

Note: For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

7.4.4. TEST RESULT

Product	Portable blender	Tested by	Brian
Model	MO2821	Observation Period (Tp)	10 mins
Test Mode	Working	Test Result	Pass
Environmental Conditions	24°C, 54 % RH, 101.1 kPa		

Guangdong MG Testing Technology Co., Ltd.


Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

Please refer to the following diagram:

Vertical:

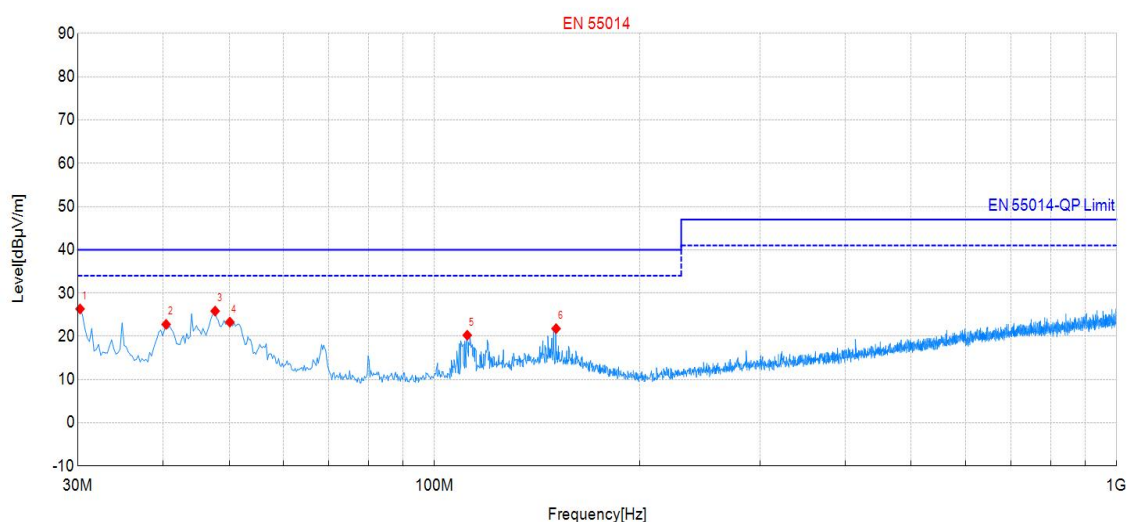

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	30.24	44.10	26.33	-17.77	40.00	13.67	100	351	QP	Vert	PASS
2	40.43	39.78	22.76	-17.02	40.00	17.24	100	358	QP	Vert	PASS
3	47.70	43.00	25.83	-17.17	40.00	14.17	100	91	QP	Vert	PASS
4	50.13	40.51	23.28	-17.23	40.00	16.72	100	7	QP	Vert	PASS
5	111.72	38.92	20.25	-18.67	40.00	19.75	100	223	QP	Vert	PASS
6	150.77	37.92	21.77	-16.15	40.00	18.23	100	175	QP	Vert	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Guangdong MG Testing Technology Co., Ltd.


Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.

This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

Horizontal:

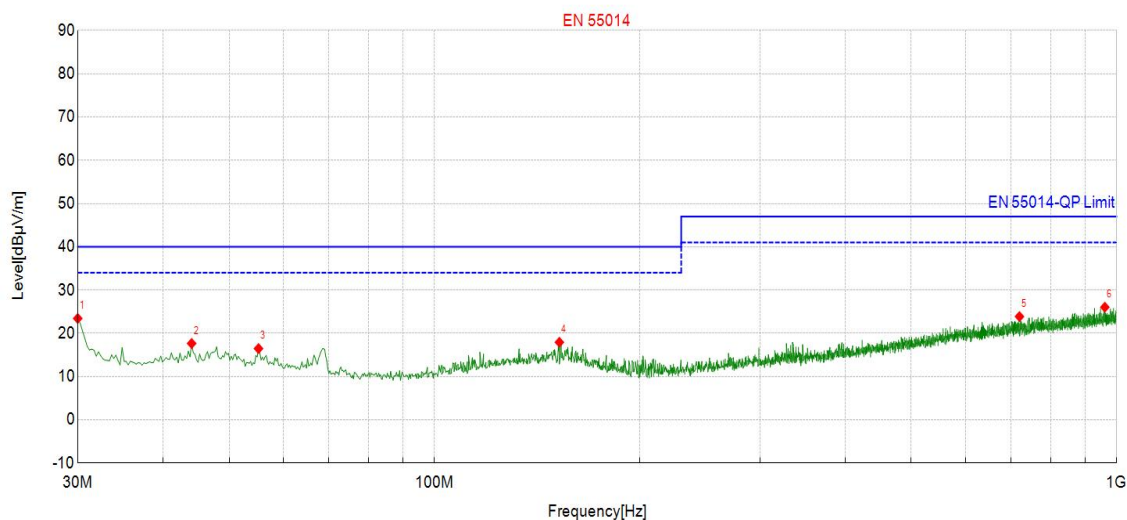

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	30.00	41.23	23.44	-17.79	40.00	16.56	100	2	QP	Hori	PASS
2	44.07	34.75	17.66	-17.09	40.00	22.34	100	145	QP	Hori	PASS
3	55.22	34.12	16.48	-17.64	40.00	23.52	100	359	QP	Hori	PASS
4	152.46	34.05	17.93	-16.12	40.00	22.07	100	2	QP	Hori	PASS
5	720.40	32.50	23.88	-8.62	47.00	23.12	100	79	QP	Hori	PASS
6	960.96	32.76	26.04	-6.72	47.00	20.96	100	359	QP	Hori	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: http://www.mg-lab.cn

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.

This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

7.5. HARMONICS CURRENT MEASUREMENT

7.5.1. LIMITS OF HARMONICS CURRENT MEASUREMENT

Limit for Class A equipment		Limit for Class D equipment		
Harmonics Order N	Max. permissible harmonics current A	Harmonics Order n	Max. permissible harmonics current per watt mA/W	Max. permissible harmonics current A
Odd harmonics		Odd Harmonics only		
3	2.30	3	3.4	2.30
5	1.14	5	1.9	1.14
7	0.77	7	1.0	0.77
9	0.40	9	0.5	0.40
11	0.33	11	0.35	0.33
13	0.21	13	0.30	0.21
$15 \leq n \leq 39$	$0.15 \times (15/n)$	$15 \leq n \leq 39$ (odd harmonics only)	$3.85/n$	$0.15 \times (15/n)$
Even harmonics				
2	1.08			
4	0.43			
6	0.30			
$8 \leq n \leq 40$	$0.23 \times 8/n$			

Limit for Class C equipment	
Harmonics Order n	Max. permissible harmonics current expressed as a percentage of the input current at the fundamental frequency A
2	2
3	30xF
5	10
7	7
9	5
$11 \leq n < \leq 39$ (odd harmonics only)	3

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: http://www.mg-lab.cn

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

F is the circuit power factor

Note: Class A, B, C and D are classified according to item 7.4.2. of this report

7.5.2. TEST PROCEDURES

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic. The classification of EUT is according to section 5 of EN 61000-3-2.

The EUT is classified as follows:

Class A:

Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.

Class B:

Portable tools; Arc welding equipment which is not professional equipment.

Class C:


Lighting equipment

Class D:

Equipment having a specified power less than or equal to 600 W of the following types: Personal computers and personal computer monitors and television receivers.

The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

7.5.3.TEST SETUP

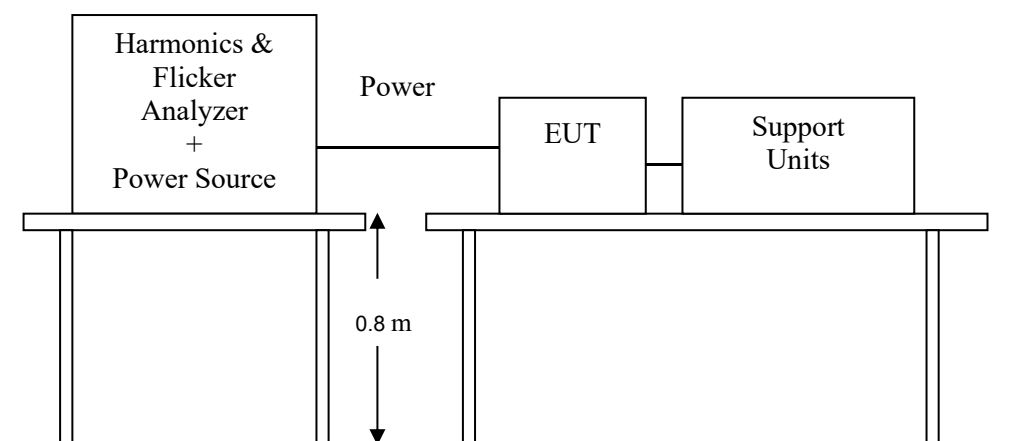

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.5.4.TEST RESULT

N/A

7.6. VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT

7.6.1. LIMITS OF VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT


TEST ITEM	LIMIT	REMARK
P_{st}	1.0	P_{st} means short-term flicker indicator.
P_{lt}	0.65	P_{lt} means long-term flicker indicator.
T_{dt} (ms)	500	T_{dt} means maximum time that dt exceeds 3 %.
d_{max} (%)	4/6/7 %	d_{max} means maximum relative voltage change.
dc (%)	3.3 %	dc means relative steady-state voltage change

7.6.2. TEST PROCEDURE

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under lighting operating conditions.

During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

7.6.3. TEST SETUP

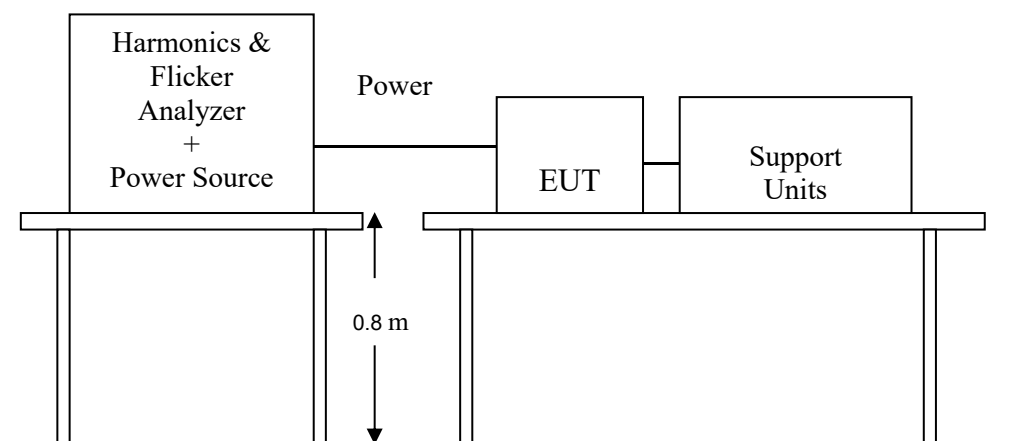

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

**7.6.4.TEST RESULT**

Product	Portable blender	Tested by	Brian
Model	MO2821	Observation Period (Tp)	10 mins
Test Mode	Working	Test Result	Pass
Environmental Conditions	24°C, 54 % RH, 101.1 kPa		

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.

This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

8. IMMUNITY TEST

8.1. GENERAL DESCRIPTION

Product Standard	EN 55014-2	
	Test Type	Minimum Requirement
Basic Standard, Specification, and Performance Criterion required	EN 61000-4-2	Electrostatic Discharge – ESD: ±8 kV air discharge, ±4 kV Contact discharge, Performance Criterion B
	EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test – RS: 80 MHz to 1 GHz, 3 V/m, 80 % AM(1 kHz), Performance Criterion A
	EN 61000-4-4	Electrical Fast Transient/Burst - EFT, Power line: ±1kV, Signal line: ±0.5kV, Performance Criterion B
	EN 61000-4-5	Surge Immunity Test: 1.2/50 µs Open Circuit Voltage, 8 /20 µs Short Circuit Current, Power Port ~ Line to line: ±1 kV, Line to ground: ±2 kV Signal and Control Port : ±0.5 kV Performance Criterion B
	EN 61000-4-6	Conducted Radio Frequency Disturbances Test –CS: 0.15 ~ 80 MHz, 3 Vrms, 80 % AM, 1 kHz, Performance Criterion A
	EN 61000-4-8	Power frequency magnetic field immunity test 50 Hz, 3 A/m Performance Criterion A
	EN 61000-4-11	Voltage Dips and Interruptions: i) 30 % reduction for 10 period, Performance Criterion C ii) 100 % reduction for 0.5 period Performance Criterion B

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: http://www.mg-lab.cn

 This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.
 This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

8.2. GENERAL PERFORMANCE CRITERIA DESCRIPTION

Criteria A:	The apparatus shell continues to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the manufacturer does not specify the minimum performance level or the permissible performance loss, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criteria B:	After test, the apparatus shell continues to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomenon below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. However, no change of operating state if stored data is allowed to persist after the test. If the manufacturer does not specify the minimum performance level or the permissible performance loss, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criteria C:	Temporary loss of function is allowed, provided the functions is self-recoverable or can be restored by the operation of controls by the user in accordance with the manufacturer instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

8.3. *ELECTROSTATIC DISCHARGE (ESD)*

8.3.1. TEST SPECIFICATION

Basic Standard:	EN 61000-4-2
Discharge Impedance:	330 Ω
Charging Capacity:	150 pF
Discharge Voltage:	Air Discharge: ± 8 kV (Direct) Contact Discharge: ± 4 kV (Direct/Indirect)
Polarity:	Positive & Negative
Number of Discharge:	10 times at each test point
Discharge Mode:	1 time/s
Performance Criterion:	B

8.3.2. TEST PROCEDURE

The discharges shall be applied in two ways:

- Contact discharges to the conductive surfaces and coupling planes:
Twenty dischargers (10 with positive and 10 with negative polarity) shall be applied on each accessible metallic part of the enclosure, terminals are excluded. In case of a non-conductive enclosure, dischargers shall be applied on the horizontal or vertical coupling planes. Test shall be performed at a maximum repetition rate of one discharge per second.
- Air discharges at slots and apertures and insulating surfaces:
On those parts of the EUT where it is not possible to perform contact discharge testing, the equipment should be investigated to identify user accessible points where breakdown may occur. Such points are tested using the air discharge method. This investigation should be restricted to those area normally handled by the user. A minimum of 10 single air discharges shall be applied to the selected test point for each such area.

The basic test procedure was in accordance with EN 61000-4-2:

- The EUT was located 0.1 m minimum from all side of the HCP (dimensions 1.6 m x 0.8 m).
- The support units were located another table 30 cm away from the EUT, but direct support unit was/were located at same location as EUT on the HCP and keep at a distance of 10cm with EUT.
- The time interval between two successive single discharges was at least 1 second.

Guangdong MG Testing Technology Co., Ltd.


Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

- d) Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- e) Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- f) At least ten single discharges (in the most sensitive polarity) were applied at the front edge of each HCP opposite the center point of each unit of the EUT and 0.1 meters from the front of the EUT. The long axis of the discharge electrode was in the plane of the HCP and perpendicular to its front edge during the discharge.
- g) At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the Vertical Coupling Plane (VCP) in sufficiently different positions that the four faces of the EUT were completely illuminated. The VCP (dimensions 0.5 m x 0.5 m) was placed vertically to and 0.1 meters from the EUT.

8.3.3.TEST SETUP

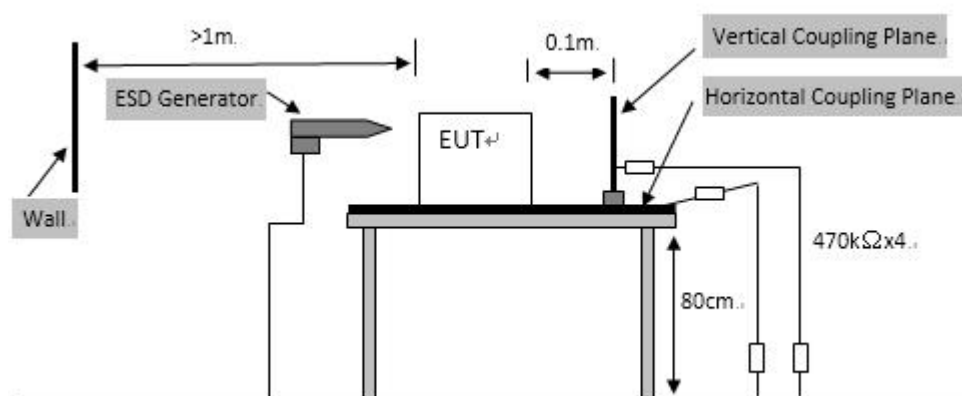

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

Note:

1) TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the ground reference plane (GRP). The GRP consisted of a sheet of aluminum at least 0.25 mm thick, and 2.5 meters square connected to the protective grounding system. A horizontal coupling plane (HCP) (1.6 m x 0.8 m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test, was installed in a representative system as described in section 7 of EN 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5 mm

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

2) FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were isolated from the ground reference plane by an insulating support of 0.1 meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25 mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

8.3.4.TEST RESULT

Product	Portable blender	Environmental Conditions	24°C, 56 % RH, 101.1 kPa
Model	MO2821	Tested By	Brian
Test mode	Working	Test Result	Pass

Air Discharge					
Test Points	Test Levels	Results			
	± 8 kV	Pass	Fail	Observation	Performance Criterion
Slot 6 Points	☒	☒	☐	Note ☐ 1 ☒ 2 ☐ 3	B
Button 2 Points	☒	☒	☐	Note ☐ 1 ☒ 2 ☐ 3	B

Contact Discharge					
Test Points	Test Levels	Results			
	± 4 kV	Pass	Fail	Observation	Performance Criterion
Screw 8 Points	☒	☒	☐	Note ☐ 1 ☒ 2 ☐ 3	B
Enclosure 4 Points	☒	☒	☐	Note ☐ 1 ☒ 2 ☐ 3	B
HCP 4 Points	☒	☒	☐	Note ☐ 1 ☒ 2 ☐ 3	B
VCP 4 Points	☒	☒	☐	Note ☐ 1 ☒ 2 ☐ 3	B

Note: 1) There was no change compared with initial operation during the test.

2) During the test the luminous intensity change, and after the test the luminous intensity can be restored to its initial value within 1 min.

3) During the test, the luminous intensity change and after the test the luminous intensity can return to normal within 30 min.

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: http://www.mg-lab.cn

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

8.4. *RADIATED RADIO-FREQUENCY, ELECTROMAGNETIC FIELD (RS)*

8.4.1. TEST SPECIFICATION


Basic Standard:	EN 61000-4-3
Frequency Range:	80 MHz ~ 1000 MHz
Field Strength:	3 V/m
Modulation:	1 kHz Sine Wave, 80 %, AM Modulation
Frequency Step:	1 % of preceding frequency value
Polarity of Antenna:	Horizontal and Vertical
Test Distance:	3 m
Antenna Height:	1.5 m
Performance Criterion:	A

8.4.2. TEST PROCEDURE

The test procedure was in accordance with EN 61000-4-3

- The testing was performed in a fully anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.
- The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80% amplitude modulated with a 1 kHz sine-wave. The rate of sweep did not exceed 1.5×10^{-3} decade/s, where the frequency range is swept incrementally, the step size was 1 % of preceding frequency value.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

8.4.3. TEST SETUP

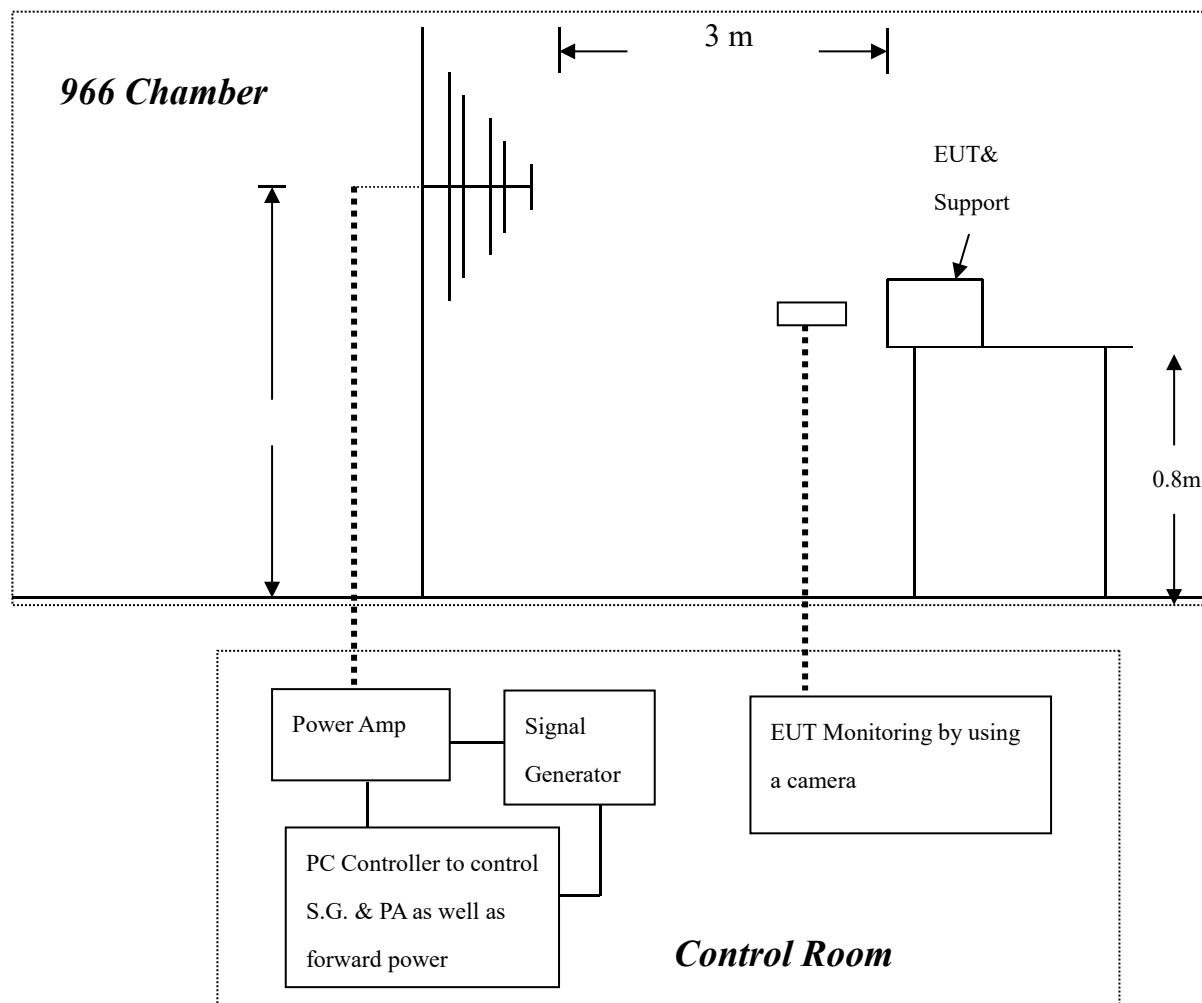

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

Note:

TABLETOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of EN 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

8.4.4.TEST RESULT

Product	Portable blender	Environmental Conditions	24°C, 54 % RH, 101.1 kPa
Model	MO2821	Tested By	Brian
Test mode	Working	Test Result	Pass

Frequency (MHz)	Polarity	Position	Field Strength (V/m)	Observation	Performance Criterion
80 ~ 1000	V&H	Front	3	Note ☒ 1 ☐ 2 ☐ 3	A
80 ~ 1000	V&H	Rear	3	Note ☒ 1 ☐ 2 ☐ 3	A
80 ~ 1000	V&H	Left	3	Note ☒ 1 ☐ 2 ☐ 3	A
80 ~ 1000	V&H	Right	3	Note ☒ 1 ☐ 2 ☐ 3	A

Note: 1) There was no change compared with initial operation during the test.

2) During the test the luminous intensity change ,and after the test the luminous intensity can be restored to its initial value within 1 min.

3) During the test, the luminous intensity change and after the test the luminous intensity can return to normal within 30 min.

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.

This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

8.5. *ELECTRICAL FAST TRANSIENT (EFT)*

8.5.1. TEST SPECIFICATION

Basic Standard:	EN 61000-4-4
Test Voltage:	Power Line: ± 1 kV Signal/Control Line: ± 0.5 kV
Polarity:	Positive & Negative
Impulse Frequency:	5 kHz
Impulse Wave-shape:	5/50 ns
Burst Duration:	15 ms
Burst Period:	300 ms
Test Duration:	2 mins
Performance Criterion:	B

8.5.2. TEST PROCEDURE

EUT is placed on a 0.1 m tall wooden table.

EUT operate at normal mode, the transient/burst was 5/50 ns in accordance with EN 61000-4-4, both positive and negative polarity burst waveform were applied.

The duration time of each test line was 2 minutes.

8.5.3. TEST SETUP

The EUT installed in a representative system as described in section 7 of EN 61000-4-4.

For the actual test configuration, please refer to the related item – photographs of the test configuration.

8.5.4.TEST RESULT

Product	Portable blender	Environmental Conditions	24°C, 54 % RH, 101.1 kPa
Model	MO2821	Tested By	Brian
Test mode	Working	Test Result	Pass

Test Point	Polarity	Test Level (kV)	Observation	Performance Criterion
L	+/-	1	Note ☐ 1 ☒ 2 ☐ 3	B
N	+/-	1	Note ☐ 1 ☒ 2 ☐ 3	B
L – N	+/-	1	Note ☐ 1 ☒ 2 ☐ 3	B
PE	+/-	1	Note ☐ 1 ☐ 2 ☐ 3	--
L – PE	+/-	1	Note ☐ 1 ☐ 2 ☐ 3	--
N – PE	+/-	1	Note ☐ 1 ☐ 2 ☐ 3	--
L – N – PE	+/-	1	Note ☐ 1 ☐ 2 ☐ 3	--
RJ45 UTP cable	--	--	--	--

Note: 1) There was no change compared with initial operation during the test.

2) During the test the luminous intensity change ,and after the test the luminous intensity can be restored to its initial value within 1 min.

3) During the test, the luminous intensity change and after the test the luminous intensity can return to normal within 30 min.

8.6. ***SURGE IMMUNITY TEST***

8.6.1. TEST SPECIFICATION

Basic Standard:	EN 61000-4-5
Wave-Shape:	Combination Wave 1.2/50 μ s Open Circuit Voltage 8/20 μ s Short Circuit Current
Test Voltage:	Power Port ~ Line to line: ± 1 kV, Line to ground: ± 2 kV
Surge Input/Output:	Power Line: L-N / L-PE / N-PE
Generator Source Impedance:	2 Ω between networks 12 Ω between network and ground
Polarity:	Positive/Negative
Phase Angle:	90°(positive polarity pulses) / 270°(negative polarity pulses)
Pulase Repetition Rate:	1 time / min
Number of Tests:	5 positive polarity pulses at the 90° phase angle, and 5 negative polarity pulses at 270° phase 3angle
Performance Criterion:	B


8.6.2. TEST PROCEDURE

EUT is placed on a 0.1 m (table type equipment) / 0.8 m (floor type equipment) tall wooden table.

EUT operate at normal mode, two types of combination wave generator (1.2/50 us open-circuit voltage and 8/20 us short-circuit current) are applied to the EUT power supply terminals via the capacitive coupling network.

The power cord between the EUT and the coupling/decoupling network shall not exceed 2 m in length.

8.6.3.TEST SETUP

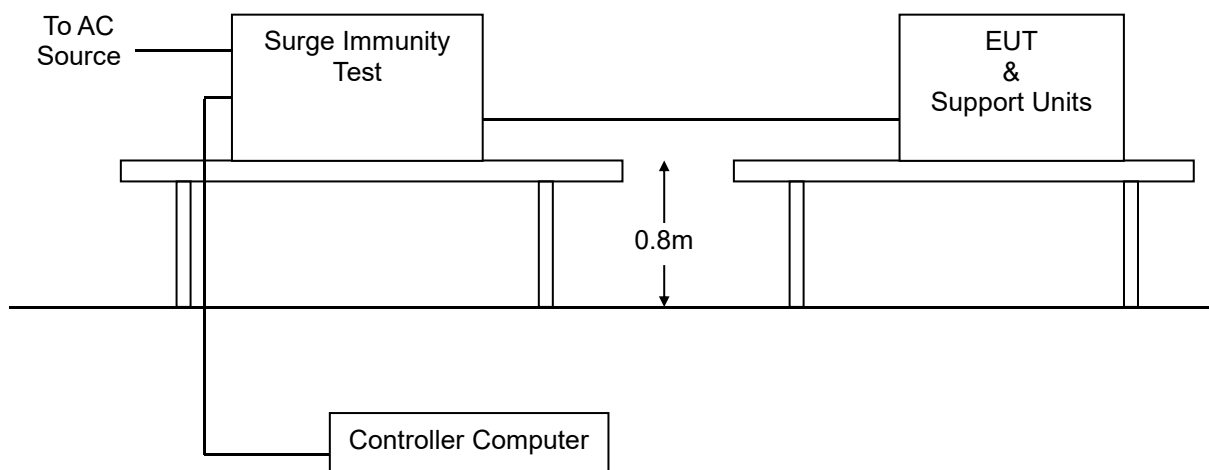

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

8.6.4.TEST RESULT

Product	Portable blender	Environmental Conditions	24°C, 54 % RH, 101.1 kPa
Model	MO2821	Tested By	Brian
Test mode	Working	Test Result	Pass

Test Point	Polarity	Test Level (kV)	Observation	Performance Criterion
L - N	+/-	1	Note ☐ 1 ☒ 2 ☐ 3	B
L - PE	+/-	2	Note ☐ 1 ☐ 2 ☐ 3	--
N - PE	+/-	2	Note ☐ 1 ☐ 2 ☐ 3	--

Note: 1) There was no change compared with initial operation during the test.

2) During the test the luminous intensity change ,and after the test the luminous intensity can be restored to its initial value within 1 min.

3) During the test, the luminous intensity change and after the test the luminous intensity can return to normal within 30 min.

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

8.7. CONDUCTED RADIO FREQUENCY DISTURBANCES (CS)

8.7.1. TEST SPECIFICATION

Basic Standard:	EN 61000-4-6
Frequency Range:	0.15 MHz ~230 MHz
Field Strength:	3 V
Modulation:	1 kHz Sine Wave, 80 %, AM Modulation
Frequency Step:	1 % of preceding frequency value
Coupled cable:	Power Mains, Shielded
Coupling device:	CDN-M3/2 (3 wires/2 wires)
Performance Criterion:	A


8.7.2. TEST PROCEDURE

The EUT shall be tested within its intended operating and climatic conditions.

The test shall performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 50 Ω load resistor.

The frequency range was swept from 150 kHz to 230 MHz, using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal was modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or the switch coupling devices as necessary. The sweep rate was 1.5×10^{-3} decades/s. Where the frequency range is swept incrementally, the step size was 1 % of preceding frequency value the dwell time of the amplitude modulated carrier at each frequency was 0.5 s.

8.7.3.TEST SETUP

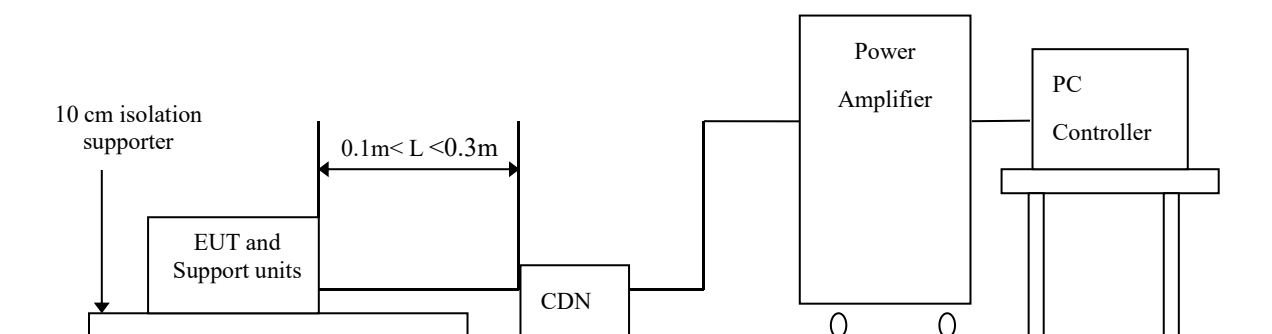

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

Note: 1) The EUT is setup 0.1 m above Ground Reference Plane

2) All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

8.7.4.TEST RESULT

Product	Portable blender	Environmental Conditions	24°C, 54 % RH, 101.1 kPa
Model	MO2821	Tested By	Brian
Test mode	Working	Test Result	Pass

Frequency (MHz)	Field Strength (Vrms)	Injected Position	Injection Method	Observation	Performance Criterion
0.15 ~ 230	3	AC Mains	CDN-M2/M3	Note ☒ 1 ☐ 2 ☐ 3	A

Note: 1) There was no change compared with initial operation during the test.

2) During the test the luminous intensity change ,and after the test the luminous intensity can be restored to its initial value within 1 min.

3) During the test, the luminous intensity change and after the test the luminous intensity can return to normal within 30 min.

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.

This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

8.8. *VOLTAGE DIP & VOLTAGE INTERRUPTIONS*

8.8.1. TEST SPECIFICATION

Basic Standard:	EN 61000-4-11
Test Duration Time:	3 test events in sequence
Interval Between Event:	10 seconds
Phase Angle:	0°
Test Cycle:	3 times
Performance Criterion:	C

8.8.2. TEST PROCEDURE


The EUT and support units were located on a wooden table, 0.8 m away from ground floor.

Setting the parameter of tests and then perform the test software of test simulator.

Changes to the voltage level shall occur at 0 degree crossing point in the a.c. voltage waveform.

Record the test result in test record form.

8.8.3. TEST SETUP

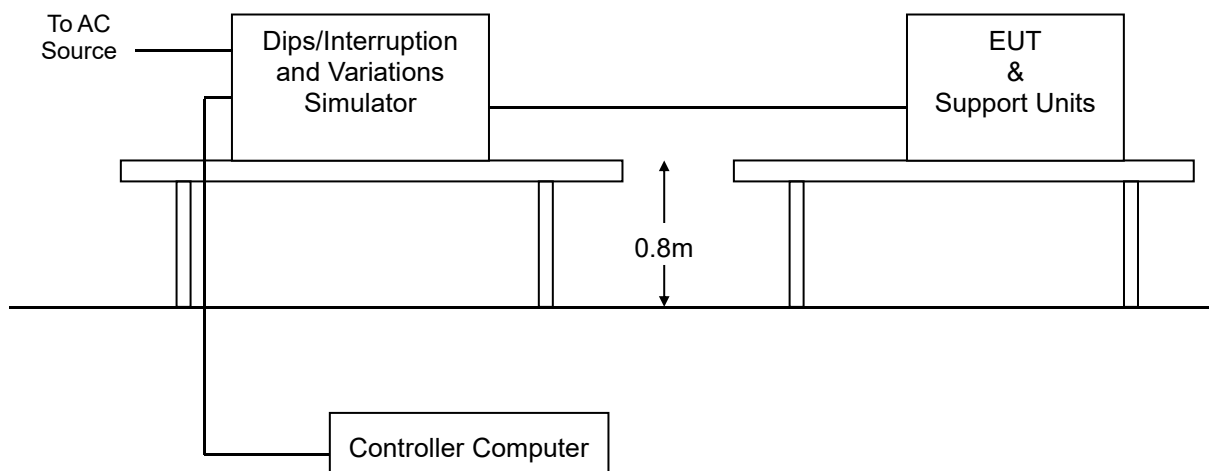

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.

This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

8.8.4.TEST RESULT

Product	Portable blender	Environmental Conditions	24°C, 54 % RH, 101.1 kPa
Model	MO2821	Tested By	Brian
Test mode	Working	Test Result	Pass

Test Power: 230 Vac, 50 Hz			
Voltage (% Reduction)	Duration (Period)	Observation	Performance Criterion
100	0.5	Note ☐ 1 ☐ 2 ☒ 3	C
60	10	Note ☐ 1 ☐ 2 ☒ 3	C
30	25	Note ☐ 1 ☐ 2 ☒ 3	C

Note: 1) There was no change compared with initial operation during the test.

2) During the test the luminous intensity change ,and after the test the luminous intensity can be restored to its initial value within 1 min.

3) During the test, the luminous intensity change, and after the test the luminous intensity can return to normal within 30 min.

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.


This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

CONDUCTED EMISSION TEST



This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

ESD TEST

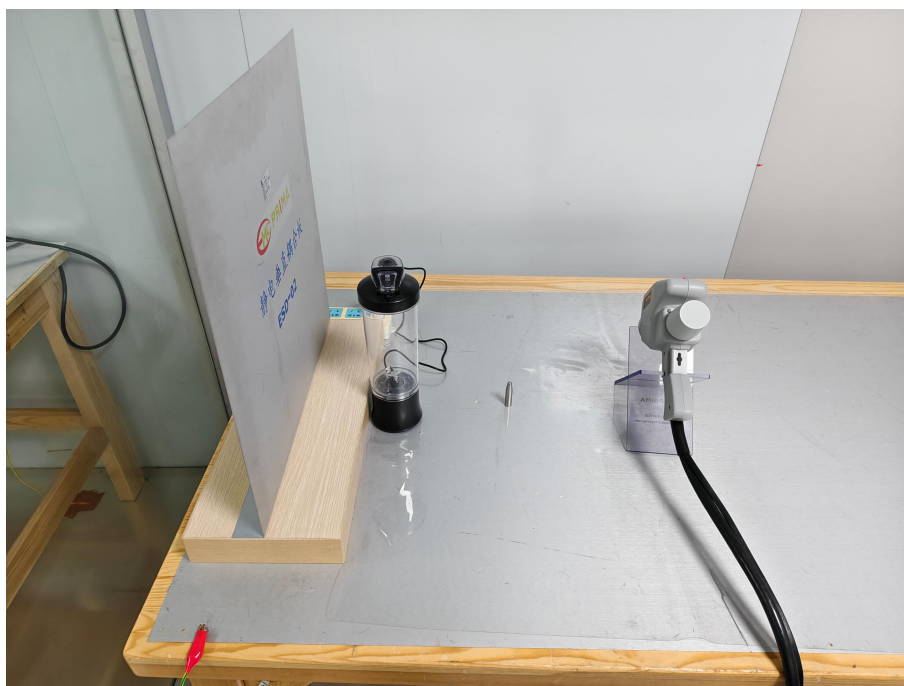

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China


Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.
This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.

10. PHOTOGRAPHS OF EUT


Detail of:

- ☐ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal

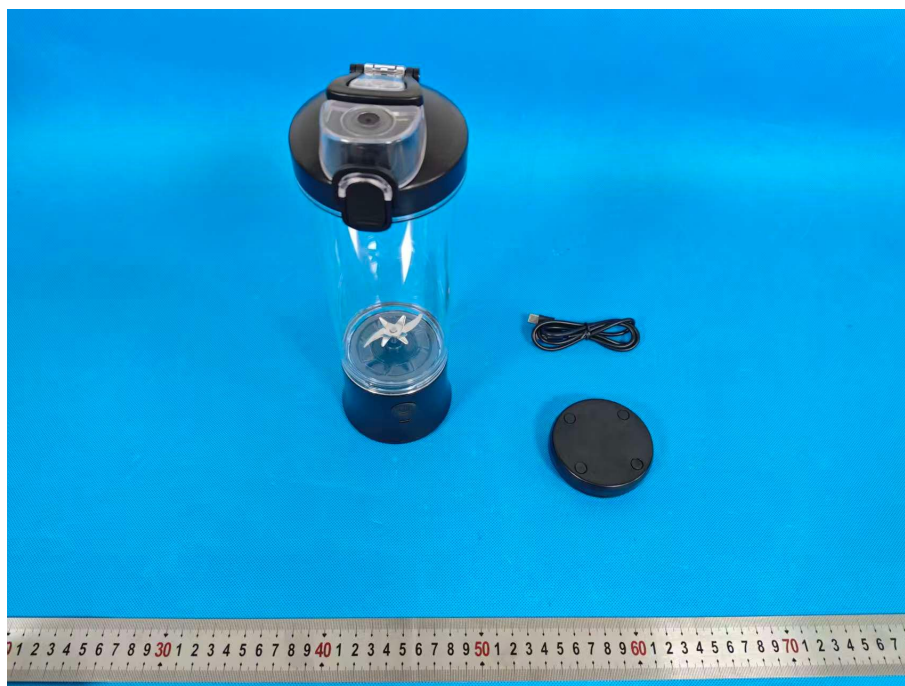

Detail of:

- ☐ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal

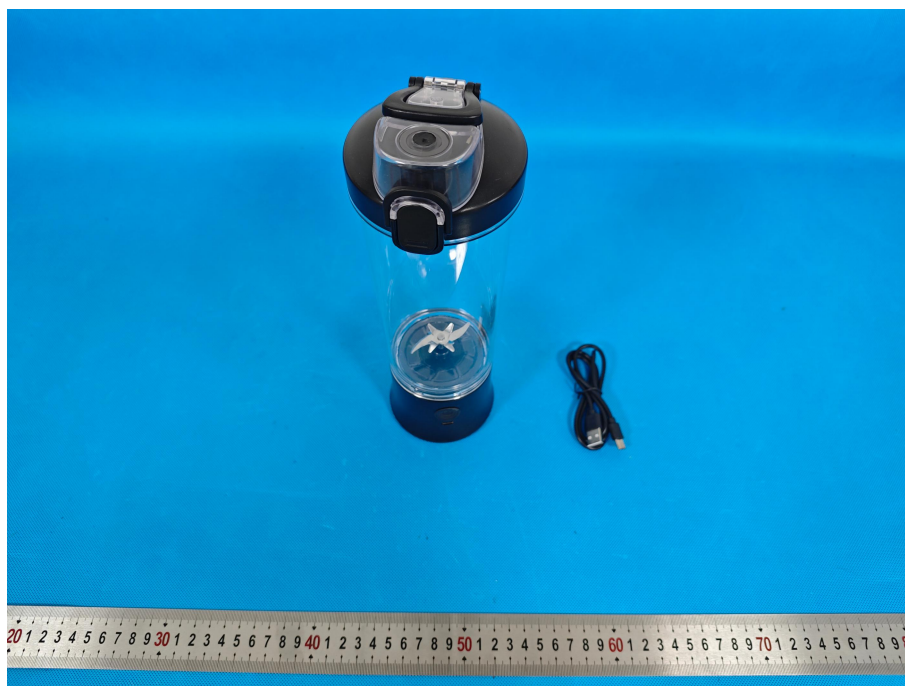

Guangdong MG Testing Technology Co., Ltd.


Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.


Detail of:

- ☐ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal

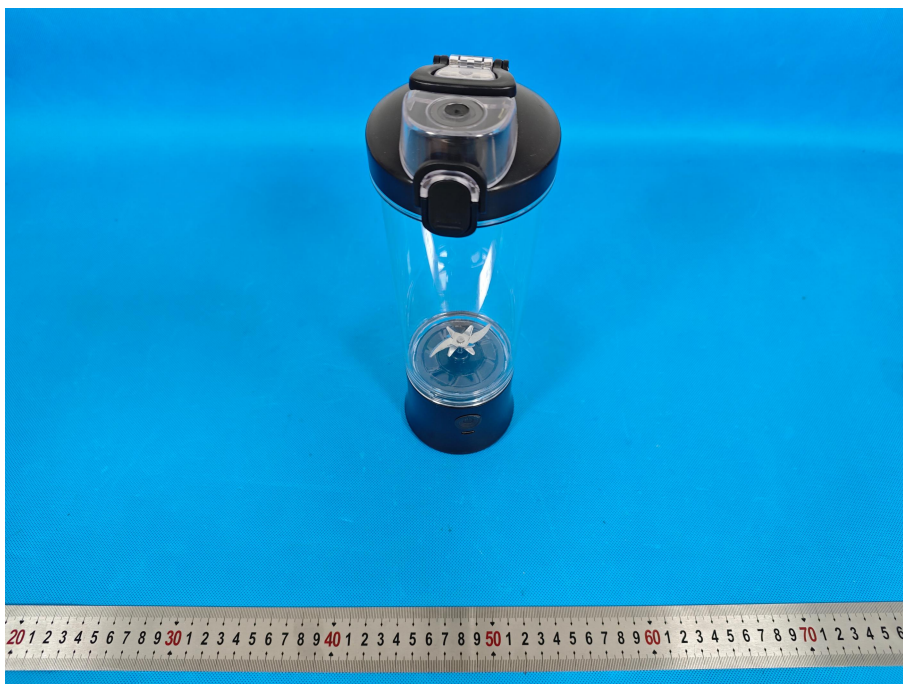

Detail of:

- ☐ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal

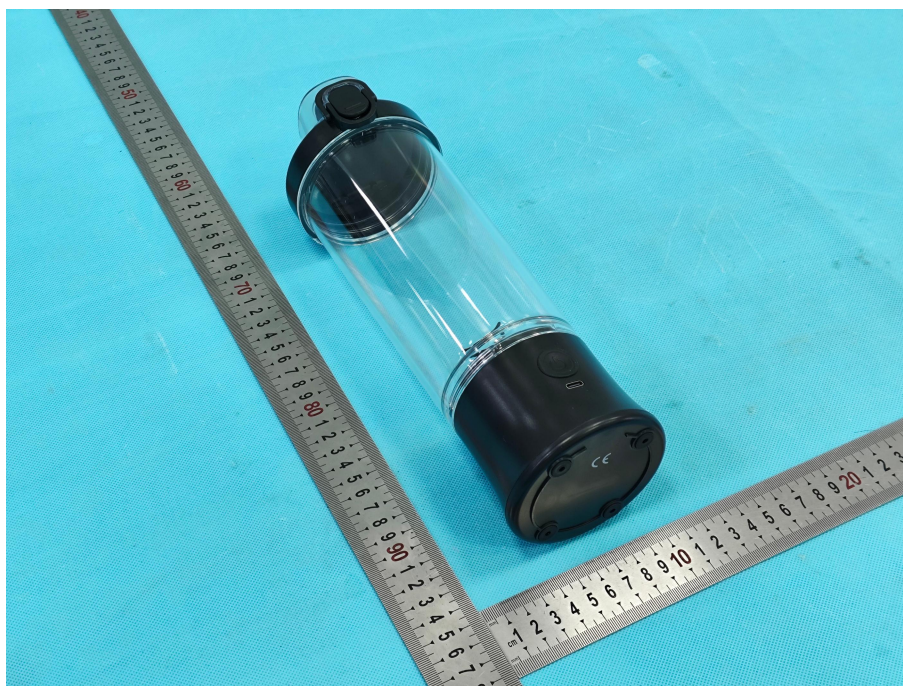

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.
This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.


Detail of:

- ☐ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal



Detail of:

- ☐ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal

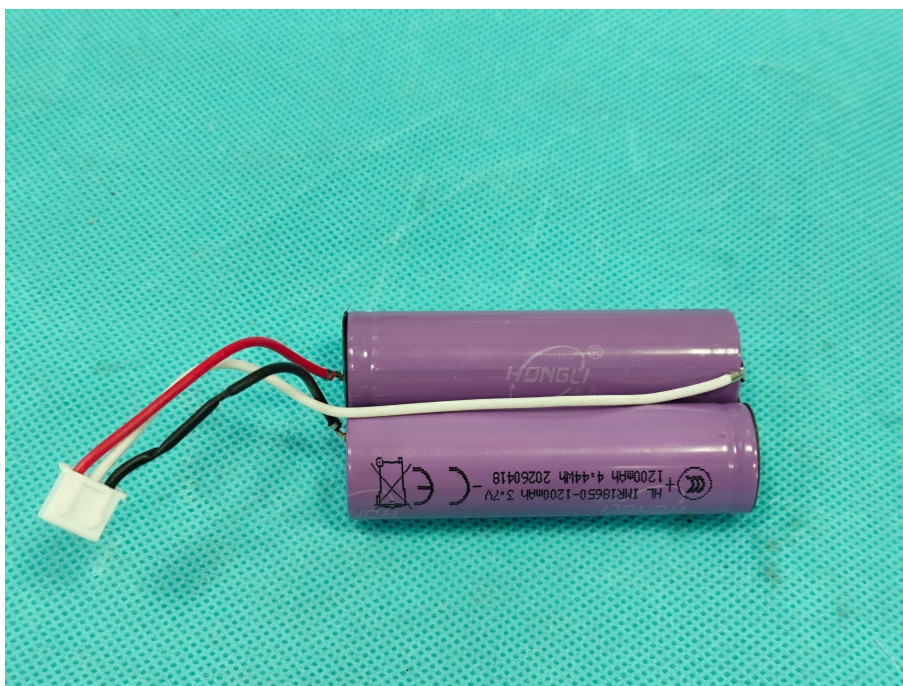

Guangdong MG Testing Technology Co., Ltd.


Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.


Detail of:

- ☐ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal

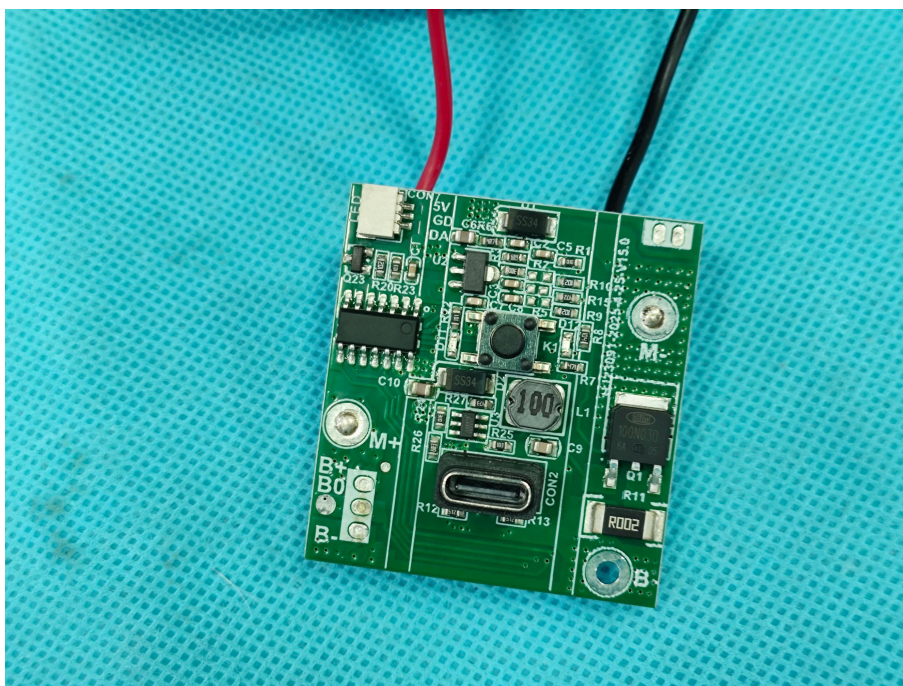

Detail of:

- ☐ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal

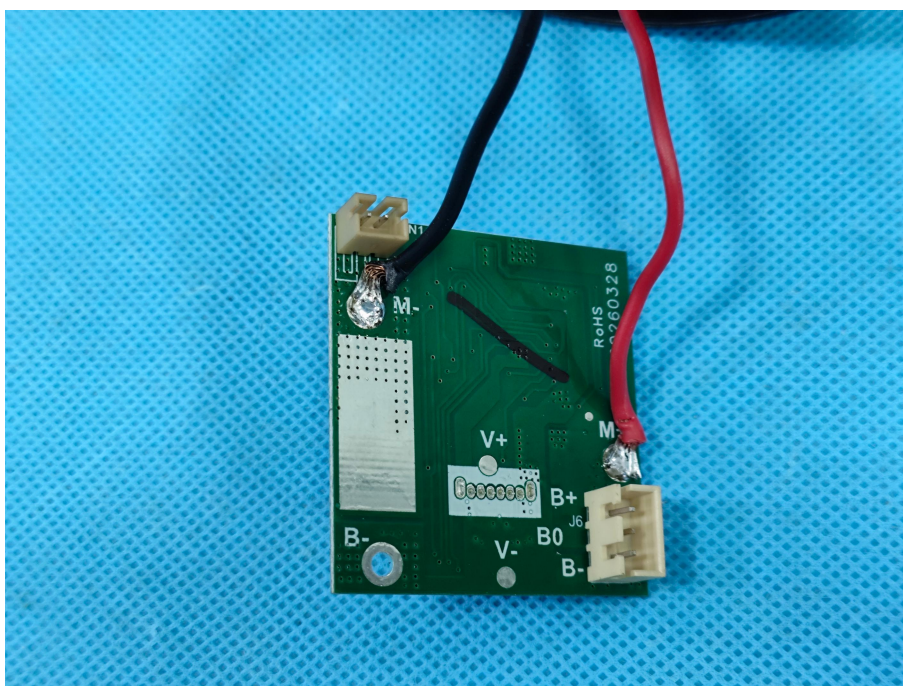

Guangdong MG Testing Technology Co., Ltd.


Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.


Detail of:

- ☐ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal

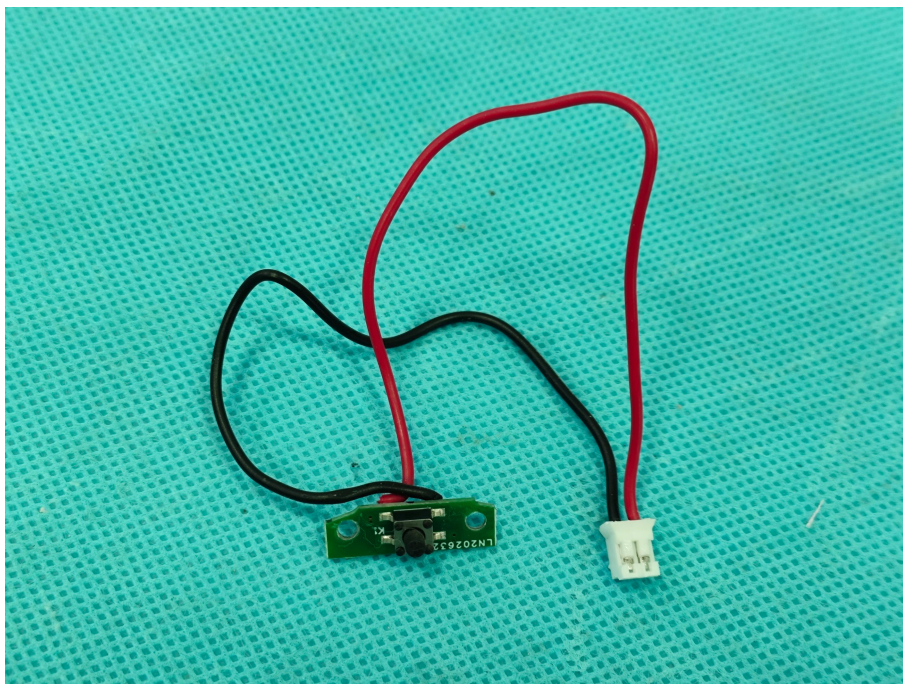

Detail of:

- ☐ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal

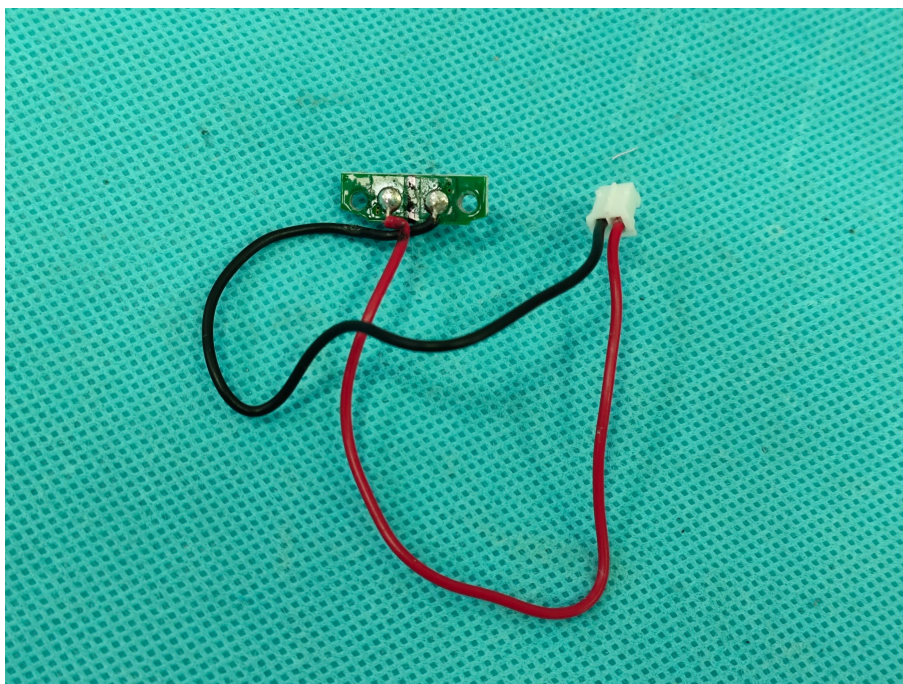

*** End of Report ***

Guangdong MG Testing Technology Co., Ltd.

Address: 3rd Floor, Building 1, No.5, Jinzhong Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Tel: +86-0769-23320020 E-mail: service@mg-lab.cn Web: <http://www.mg-lab.cn>

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection. This report shall not be altered, increased or deleted. Without written approval of MG, this test report shall not be copied except in full and published as advertisement.