



EMC Test Report

Report No:MAX7737B808E

Date:Jun.01,2026

Page 1 of 28

Applicant	Mid Ocean Brands B.V.
Address	Unit 711 - 716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Manufacturer	Mid Ocean Brands B.V.
Address	Unit 711 - 716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.

Equipment Under Test (EUT):

Sample Name	Emergency hammer in aluminium
Trademark	/
Model No.	MO2357-03
Additional model	/
Date of Receipt	May.25,2026
Date of Test	May.25,2026 To Jun.01,2026
Standard(s) :	EN IEC 55015:2019/A11:2020 EN 61547:2009 EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013 + A1:2019 + A2:2021
Test Result	PASS
Date of Issue	Jun.01,2026

Approved by:

Vivian Jiang

Reviewed by:

Gravin Zhang

Tested by:

Grace

MAXLAB TESTING CO., LTD.

1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China

Tel: 4008278520 Website: <http://www.imax-lab.com> E-mail: Maxlab@imax-lab.com

EMC Test Report

Report No:MAX7737B808E

Date:Jun.01,2026

Page 2 of 28

List of Attachments (including a total number of pages in each attachment): /	
Summary of testing:	
Tests performed (name of test and test clause): The submitted samples were tested and found to comply with the requirements of: European group difference and national differences	Testing location: MAXLAB TESTING CO.. LTD. 1/F, Building B, Xinshidai GR Park,Shiyan Street, Bao'an District, Shenzhen,Guangdong, 518052, People's Republic of China
Summary of compliance with National Differences: ☒ The product fulfils the requirements of EN IEC 55015:2019/A11:2020 EN 61547:2009 EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013 + A1:2019 + A2:2021	
Copy of marking plate Emergency hammer in aluminium Model No.:MO2357-03 Rating: DC CE  Made in China Mid Ocean Brands B.V. Unit 711- 716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.	
Note: As declared by the applicant the authorized EEA representative or importer was not decided at the time of application, but will be marked on the products before placing them on the market. Note: According to when placing the products on the market the authorized representative / importer within the European Economic Area (EEA) must be marked on the product if the manufacturer is not located within the EEA. Marking on the packaging is only acceptable if it is not possible to place such markings on the product.	

MAXLAB TESTING CO.. LTD.

1/F, Building B, Xinshidai GR Park,Shiyan Street, Bao'an District, Shenzhen,Guangdong, 518052, People's Republic of China

Tel: 4008278520 Website: <http://www.imax-lab.com> E-mail: Maxlab@imax-lab.com

EMC Test Report

Report No:MAX7737B808E

Date:Jun.01,2026

Page 3 of 28

1 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Mains Power Port (150kHz-30MHz)	EN IEC 55015:2019/A11:2020	EN IEC 55015:2019/A11:2020	--	Pass
Radiated Emissions	EN IEC 55015:2019/A11:2020	EN IEC 55015:2019/A11:2020	Class B	Pass
Discontinuous Interference	EN IEC 55015:2019/A11:2020	EN IEC 55015:2019/A11:2020	CISPR 15-1	Pass
Harmonic Current Emission	EN IEC 61000-3-2:2019/A1:2021	EN IEC 61000-3-2:2019/A1:2021	Class A	Pass
Voltage Fluctuations and Flicker	EN 61000-3-3:2013/A1:2019/A2:2021	EN 61000-3-3:2013/A1:2019/A2:2021	Clause 5 of EN 61000-3-3	Pass

Immunity Part				
Item	Standard	Method	Requirement	Result
Electrostatic Discharge	EN61547:2009	EN 61000-4-2:2009	2,4kV Contact Discharge, 2,4,8kV Air Discharge	Pass
Continuos RF Electromagnetic field Disturbance	EN IEC 61000-6-1:2019	EN 61000-4-3:2006 +A1:2007+A2:2010	80%,1kHz, AM Mod 31V/m,0.08~1GHz 31V/m,1.4~2.0GHz 1V/m,2.0~2.7GHz	Pass
Electrical Fast Transients Burst at AC Mains Power Port	EN IEC 61000-6-1:2019	EN 61000-4-4:2012	1kV, 5/50ns Tr/Td, 5kHz Repetition Frequency	Pass
Surge at AC Mains Power Port	EN IEC 61000-6-1:2019	EN 61000-4-5:2014 +A1:2017	1.2/50μs Tr/Td, 1kV Line to Line, 2kV Line to Ground	Pass
Conducted Immunity at AC Mains Power Port (150kHz-80MHz)	EN IEC 61000-6-1:2019	EN 61000-4-6:2014	31Vrms (emf),80%,1kHz Amp. Mod.	Pass
Voltage Dips and Interruptions	EN IEC 61000-6-1:2019	EN 61000-4-11:2004 +A1:2017	For 50Hz: 0 % UT for 0.5cycle, 0 % UT for 1.0cycles, 70 % UT for 25cycles 0 % UT for 250cycles,	Pass

Note: (1)= Continuous working product. (2)=Refer to section 5.4.

MAXLAB TESTING CO., LTD.

1/F, Building B, Xinshidai GR Park,Shiyan Street, Bao'an District, Shenzhen,Guangdong, 518052, People's Republic of China

Tel: 4008278520 Website: <http://www.imax-lab.com> E-mail: Maxlab@imax-lab.com

2 Contents

	Page
1 Cover Page.....	1
1 Test Summary	3
2 Contents	4
3 General Information	6
3.1 Details of E.U.T.	6
3.2 Description of Support Units	6
3.3 Measurement Uncertainty	6
3.4 Test Location	6
3.5 Test Facility	6
3.6 Deviation from Standards	6
3.7 Abnormalities from Standard Conditions	6
3.8 EMS Monitor	6
4 Equipment List	7
5 Emission Test Results	8
5.1 Conducted Emissions at AC Mains Power Port (150kHz-30MHz)	8
5.1.1 E.U.T. Operation	8
5.1.2 Test Mode Description	8
5.1.3 Test Setup Diagram	8
5.1.4 Measurement Procedure and Data	8
5.2 Disturbance POWER test	12
5.2.1 E.U.T. Operation	12
5.2.2 Test Mode Description	12
5.2.3 Test Setup Diagram	12
5.2.4 Measurement Procedure and Data	12
5.3 Radiated Emissions	15
5.3.1 E.U.T. Operation	15
5.3.2 Test Mode Description	15
5.3.3 Test Setup Diagram	15
5.3.4 Measurement Procedure and Data	15
5.4 Voltage Fluctuations and Flicker	16
5.4.1 E.U.T. Operation	16
5.4.2 Test Mode Description	16
5.4.3 Test Setup Diagram	16
5.4.4 Measurement Procedure and Data	17
5.5 Harmonic Current Emission	18
5.5.1 E.U.T. Operation	18
5.5.2 Test Setup Diagram	18
5.5.3 Measurement Data	19
6 Immunity Test Results	20
6.1 Electrostatic Discharge	21
6.1.1 Test Setup Diagram	21
6.1.2 E.U.T. Operation	21
6.1.3 Test Mode Description	21
6.1.4 Test Condition and Results:	21
6.2 Continuous RF Electromagnetic field Disturbance	23
2.1.1 Test Setup Diagram	23

EMC Test Report

Report No:MAX7737B808E

Date:Jun.01,2026

Page 5 of 28

6.2.1 E.U.T. Operation	23
6.2.2 Test Mode Description	23
6.2.3 Test Condition and Results:	23
6.3 Electrical Fast Transients Burst at AC Mains Power Port	24
6.3.1 Test Setup Diagram	24
6.3.2 E.U.T. Operation	24
6.3.3 Test Mode Description	24
6.3.4 Test Condition and Results:	24
6.4 Surge at AC Mains Power Port	25
6.4.1 Test Setup Diagram	25
6.4.2 E.U.T. Operation	25
6.4.3 Test Mode Description	25
6.4.4 Test Condition and Results:	25
6.5 Conducted Immunity at AC Mains Power Port (150kHz-80MHz)	26
2.1.2 Test Setup Diagram	26
6.5.1 E.U.T. Operation	26
6.5.2 Test Mode Description	26
6.5.3 Test Condition and Results:	26
6.6 Voltage Dips and Interruptions	27
6.6.1 Test Setup Diagram	27
6.6.2 E.U.T. Operation	27
6.6.3 Test Mode Description	27
6.6.4 Test Condition and Results:	27
7 EUT Constructional Details (EUT Photos)	28

General Information

3.1 Details of E.U.T.

Power supply: DC
Test Voltage: AC
Cable(s): AC:2 wires 1.0m unshielded out put for the adapter.

3.2 Description of Support Units

3.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Mains Power Port (150kHz-30MHz)	3.12dB
Radiated Emissions(30MHz-1000MHz)	3.66dB
Remark: The U_{lab} (lab Uncertainty) is less than U_{cisp} (CISPR Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.	

3.4 Test Location

MAXLAB TESTING CO.. LTD.

1/F, Building B, Xinshidai GR Park,Shiyan Street, Bao'an District, Shenzhen,Guangdong, 518052, People's Republic of China

3.5 Test Facility

The test facility is recognized, certified, or accredited.

3.6 Deviation from Standards

This report is based on the requirements of customers to carry the equipment in the manufacturer for on-site testing.

3.7 Abnormalities from Standard Conditions

The test equipment in the calibration period, but the test site has not been calibrated.

3.8 EMS Monitor

Visual: LCD Display
Audio: Buzzing
Other: N/A



EMC Test Report

Report No:MAX7737B808E

Date:Jun.01,2026

Page 7 of 28

4 Equipment List

Test Equipment	Model	Manufacturer	Serial No.	Cal Date
EMC Laboratory				
Conduction& Radiated Test equipment				
EMI Test Receiver	ESPI	R&S	102086	2026.10.14
LISN	ENV216	R&S	101242	2026.10.14
LISN	3810/2NM	EMCO	000-23625	2026.10.14
Bi-log Antenna	CBL6111D	TESEQ	34678	2026.10.14
Pre-Amplifier (0.1M-3GHz)	EM330	EM	060665	2026.10.14
RE Cable (9K-1G)	N/A	R01	N/A	2026.10.14
EMS Test equipment				
ESD				
ESD TEST GENERATOR	KES4021	KZKUSUI	LB003568	2026.06.27
EFT				
EFT/B Generator	HEFT 51	HTEC	143801	2026.10.14
Surge				
Surge Generator	HCWG71	HTEC	143804	2026.10.14
Conducted RF immunity				
CS	CDG-6000-25	SCHLODER	126A1280/2014	2026.10.14
Attenuator	ATT-6DB-100	Nemtest	A100W224	2026.10.14
CDN	CDN-M2+3	Frankonia	A2210275/2014	2026.10.14
Coupling clamp	----	KEMZ801	-----	2026.10.14
Voltage dips, short interruptions and voltage variations immunity				
VOLTAGE DIPS & INTERRUPTIONS Generator	HPFS 161P	HTEC	143803	2025.10.17
Harmonics & Flicker				
Harmonic Voltage & Flicker	PACS-1	California Instruments	72812	2026.10.14
AC Power Source	5000ix	California Instruments	59862	2026.10.14

Radiated Immunity				
No.	Test Item	Equipment	Model No.	Cal due date
1	Power Meter	Agilent	E4419B	2026.10.14
2	Power Sensor	Hp	E9300A	2026.10.14
3	Power Sensor	Hp	E9300A	2026.10.14
4	Signal Generator	Agilent	N5181A	2026.10.14
5	Power Amplifier	MICOTOP	MPA-80-1000-250	2026.10.14
6	Power Amplifier	MICOTOP	MPA-1000-6000-100	2026.10.14
7	RS Test Antenna (0.08-1GHz)	SCHWARZBECK	VULP 9118E	N/A
8	RS Test Antenna (1-10GHz)	SCHWARZBECK	STLP 9149	N/A
9	Temperature & Humidity	Mieo	HH660	2026.10.14

MAXLAB TESTING CO., LTD.

1/F, Building B, Xinshidai GR Park,Shiyan Street, Bao'an District, Shenzhen,Guangdong, 518052, People's Republic of China

Tel: 4008278520 Website: <http://www.imax-lab.com> E-mail: Maxlab@imax-lab.com

5 Emission Test Results

5.1 Conducted Emissions at AC Mains Power Port (150kHz-30MHz)

Test Requirement: EN IEC 55015:2019/A11:2020

Test Method: EN IEC 55015:2019/A11:2020

Limit:

0.15M-0.5MHz 66dB(μV)-56dB(μV) quasi-peak, 59dB(μV)-46dB(μV) average

0.5M-5MHz 56dB(μV) quasi-peak, 46dB(μV) average

5M-30MHz 60dB(μV) quasi-peak, 50dB(μV) average

Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

5.1.1 E.U.T. Operation


Operating Environment:

Temperature: 22.1 °C Humidity: 52 % RH Atmospheric Pressure: 1010 mbar

5.1.2 Test Mode Description

Test Mode: Normal working mode(Max Loading).

5.1.3 Test Setup Diagram

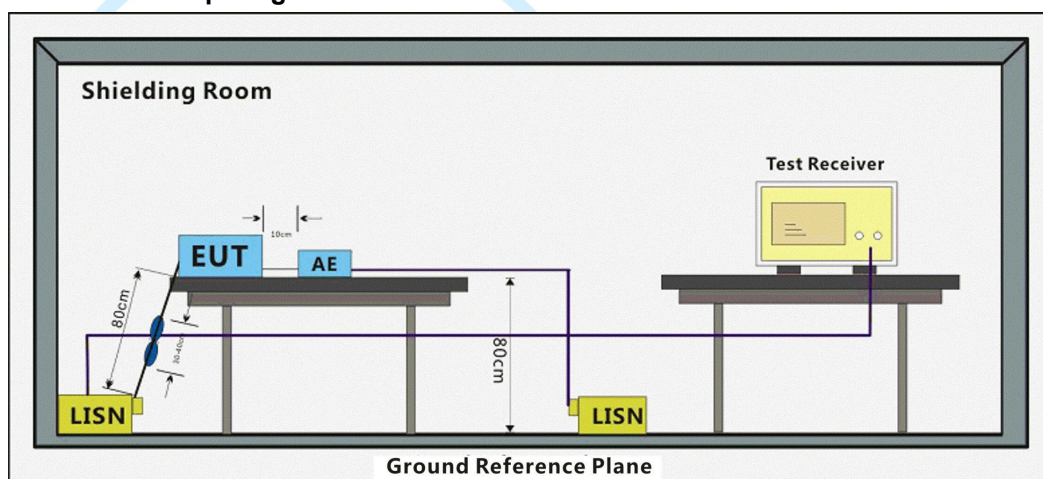

5.1.4 Measurement Procedure and Data

Frequency Range: 150kHz to 30MHz

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.

Measured Level = Read level + Cable Loss + LISN Factor


EMC Test Report

Report No:MAX7737B808E

Date:Jun.01,2026

Page 9 of 28

Live line

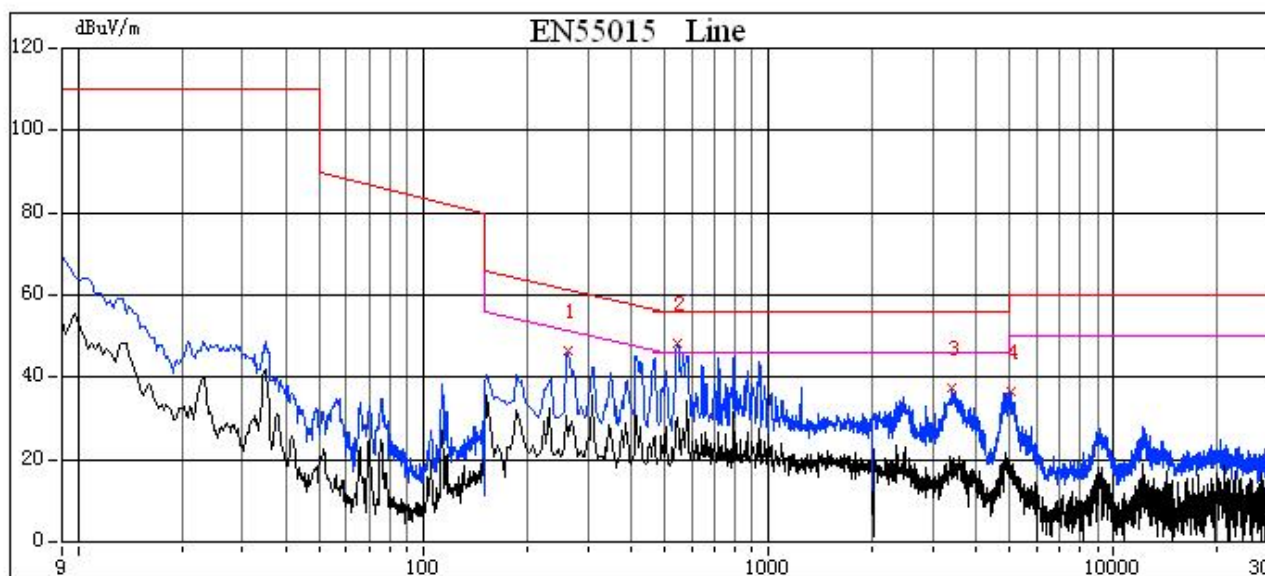[illegible]

Note: Measurement Level = Reading Level + Correct Factor

MAXLAB TESTING CO., LTD.

1/F, Building B, Xinshidai GR Park,Shiyan Street, Bao'an District, Shenzhen,Guangdong, 518052,
People's Republic of China

Tel: 4008278520 Website: <http://www.imax-lab.com> E-mail: Maxlab@imax-lab.com


EMC Test Report

Report No:MAX7737B808E

Date:Jun.01,2026

Page 10 of 28

Neutral Line

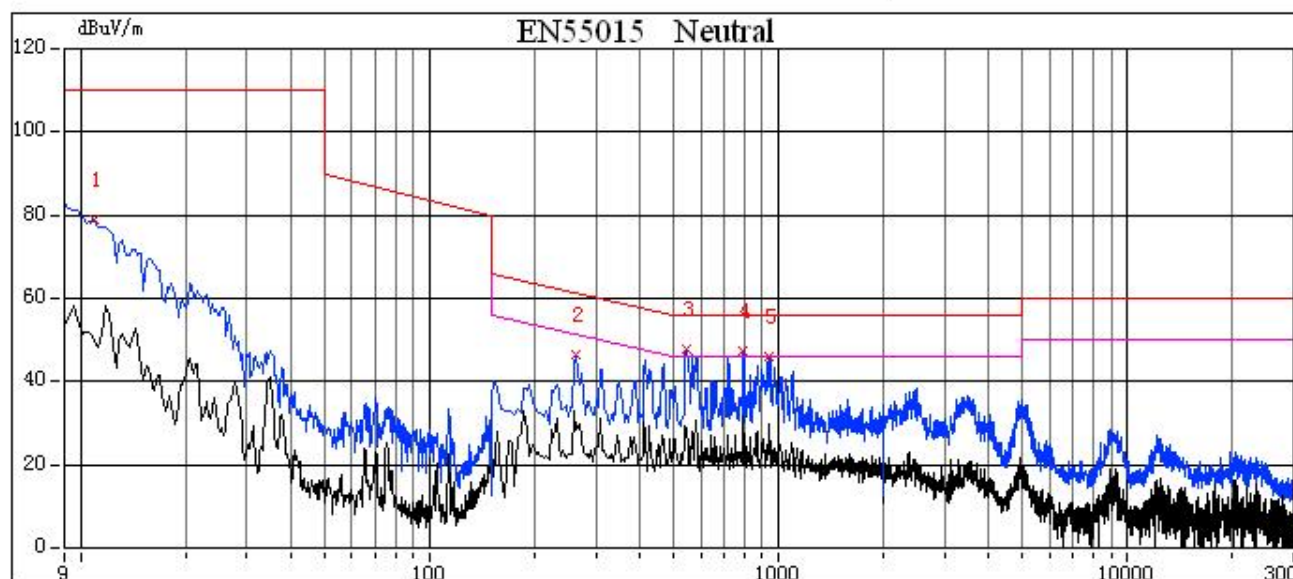[illegible]

Note: Measurement Level = Reading Level + Correct Factor

MAXLAB TESTING CO., LTD.

1/F, Building B, Xinshidai GR Park,Shiyan Street, Bao'an District, Shenzhen,Guangdong, 518052,
People's Republic of China

Tel: 4008278520 Website: <http://www.imax-lab.com> E-mail: Maxlab@imax-lab.com

EMC Test Report

Report No:MAX7737B808E

Date:Jun.01,2026

Page 11 of 28

5.2 Magnetic TEST

Test Requirement: EN IEC 55015:2019/A11:2020

Test Method: EN IEC 55015:2019/A11:2020

Limit:

Frequency	Limits for loop diameter (dB μ A)
	2m
9KHz ~ 70KHz	88
70KHz ~ 150KHz	88 ~ 58*
150KHz ~ 2.2MHz	58 ~ 26*
2.2MHz ~ 3.0MHz	58
3.0MHz ~ 30MHz	22

1. At the transition frequency the lower limit applies.
2. * decreasing linearly with logarithm of the frequency.


5.2.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C Humidity: 54 % RH Atmospheric Pressure: 1010 mbar

5.2.2 Test Mode Description

Test Mode: Normal working mode(Max Loading).

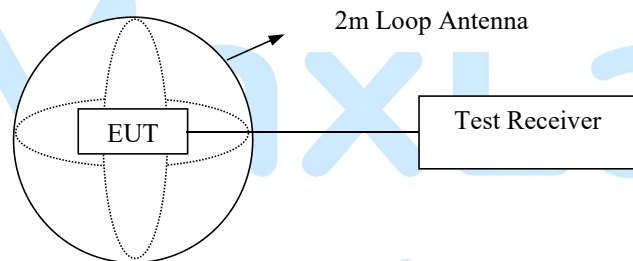

(EUT:Emergency hammer in aluminium)

5.2.3 Measurement Procedure and Data

The EUT is placed on a wood table in the center of a loop antenna. The induced current in the loop antenna is measured by means of a current probe and the test receiver. Three field components is checked by means of a coax switch.

The frequency range from 9kHz to 30MHz is investigated. The receiver is measured with the quasi-peak detector. For frequency band 9kHz to 150kHz, the bandwidth of the field strength meter is set at 200Hz. For frequency band 150kHz to 30MHz, the bandwidth is set at 9kHz.

All the test results are listed in Section 6.7. and all the scanning waveform is put in **Appendix II**.

5.3 Disturbance POWER test

Test Requirement: EN IEC 55015:2019/A11:2020

Test Method: EN IEC 55015:2019/A11:2020

Limit:

30 ~ 300 45 Increasing Linearly with Frequency to 55 (Q.P.)

35 Increasing Linearly with Frequency to 45 (A.V.)

5.3.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C


Humidity: 54 % RH

Atmospheric Pressure: 1010 mbar

5.3.2 Test Mode Description

Test Mode: Normal working mode(Max Loading).

5.3.3 Test Setup Diagram

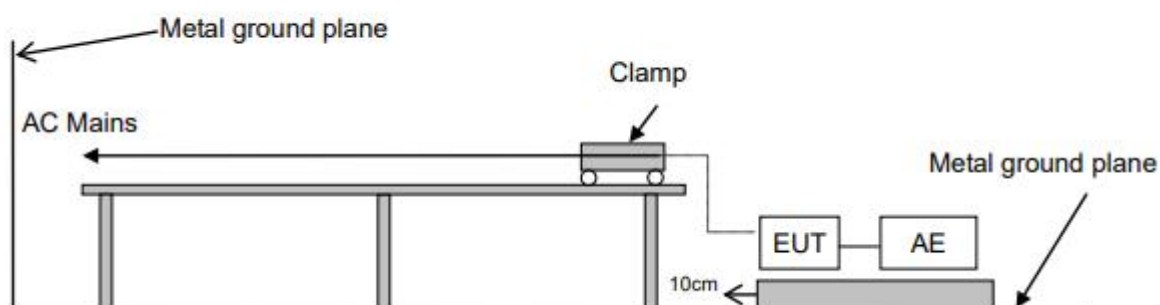

5.3.4 Measurement Procedure and Data

The EUT is placed on the ground and away from other metallic surface at least 0.4m. It is connected to the power mains through an extension cord of 6m min. The absorber clamp clamps the cord and moves from the far end to the EUT to measure the disturbing energy emitted from the cord.

The bandwidth of the test receiver is set at 120kHz.

All the test results are listed in Section 6.6.

The frequency spectrum from 30 MHz to 300 MHz is investigated.

As the peak value is too low against the limit, so the quasi-peak value and average value have omitted.


All the scanning waveforms are attached in **Appendix II**

EMC Test Report

Report No:MAX7737B808E

Date:Jun.01,2026

Page 13 of 28

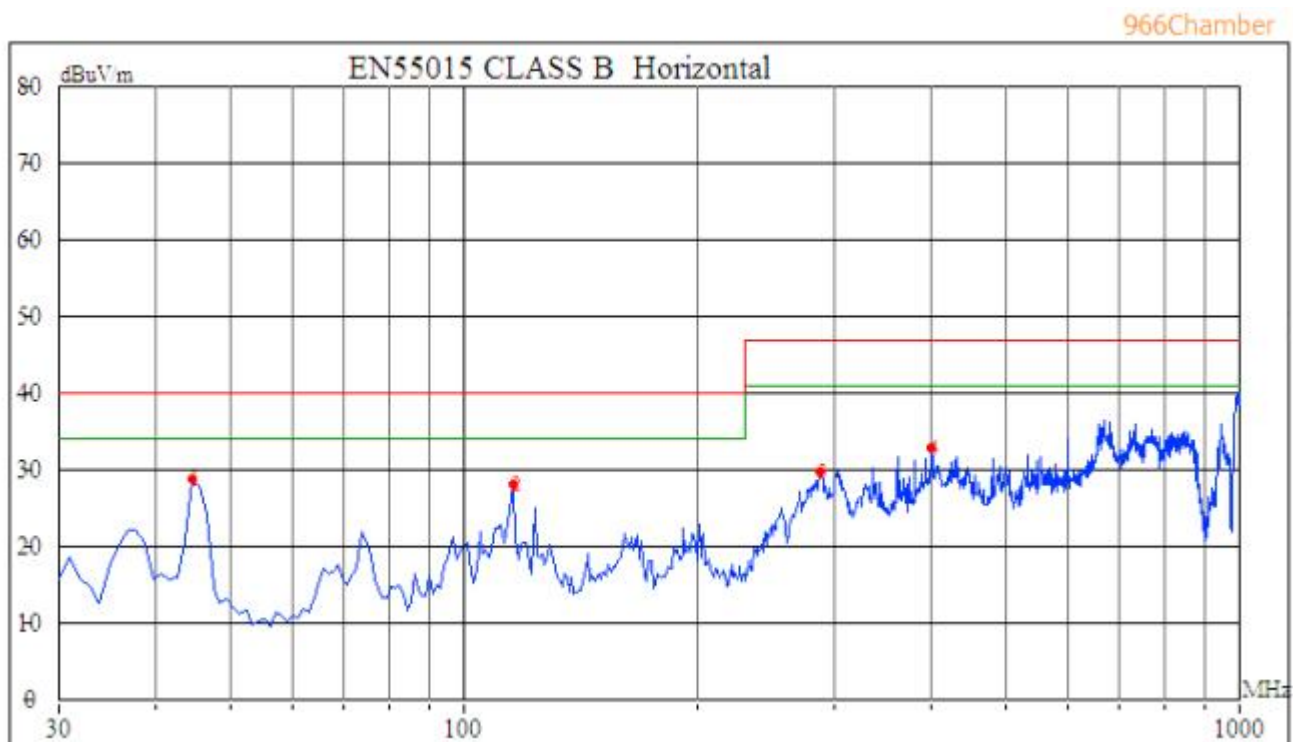
[illegible]

EMC Test Report

Report No:MAX7737B808E

Date:Jun.01,2026

Page 14 of 28

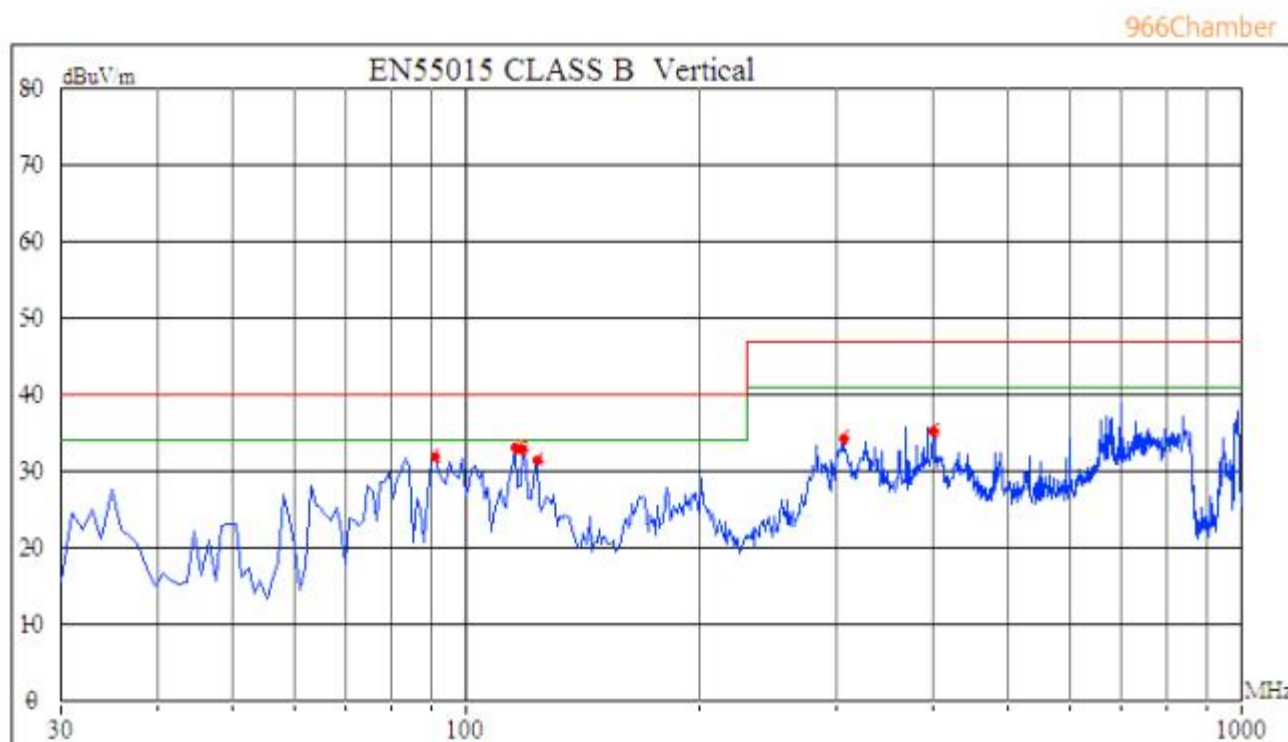[illegible]

5.4 Radiated Emissions

Test Requirement: EN IEC 55015:2019/A11:2020
 Test Method: EN IEC 55015:2019/A11:2020
 Limit:
 30MHz- 230MHz: 40dBuV/m quasi-peak
 230MHz- 1000MHz: 47dBuV/m quasi-peak
 Detector: Peak for pre-scan (120kHz resolution bandwidth) 30MHz to 1000MHz


5.4.1 E.U.T. Operation

Operating Environment:
 Temperature: 22.0 °C Humidity: 52 % RH Atmospheric Pressure: 1010 mbar

5.4.2 Test Mode Description

Test Mode: Normal working mode(Max Loading).

5.4.3 Test Setup Diagram

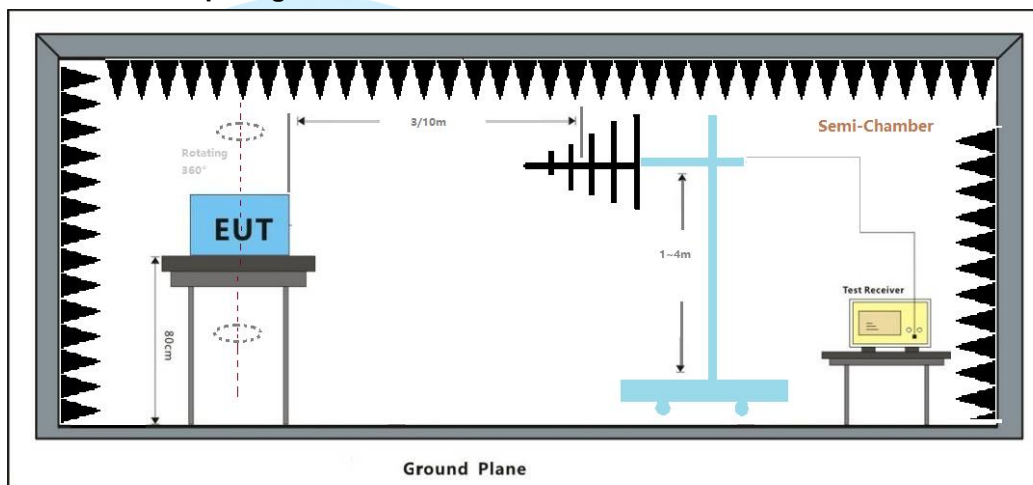

5.4.4 Measurement Procedure and Data

Frequency Range: 30MHz to 1000MHz

An initial pre-scan was performed with peak detector. Quasi-Peak measurement was performed at the frequencies with maximized peak emission were detected.

Measured Level = Read level + Cable Loss + Ant Factor- Pre-amp

5.5 Voltage Fluctuations and Flicker

Test Requirement: EN 61000-3-3:2013/A1:2019/A2:2021

Test Method: EN 61000-3-3:2013/A1:2019/A2:2021

5.5.1 E.U.T. Operation


Operating Environment:

Temperature: 25.6 °C Humidity: 65.6 % RH Atmospheric Pressure: 1010 mbar

5.5.2 Test Mode Description

Test Mode: Normal working mode(Max Loading).

5.5.3 Test Setup Diagram

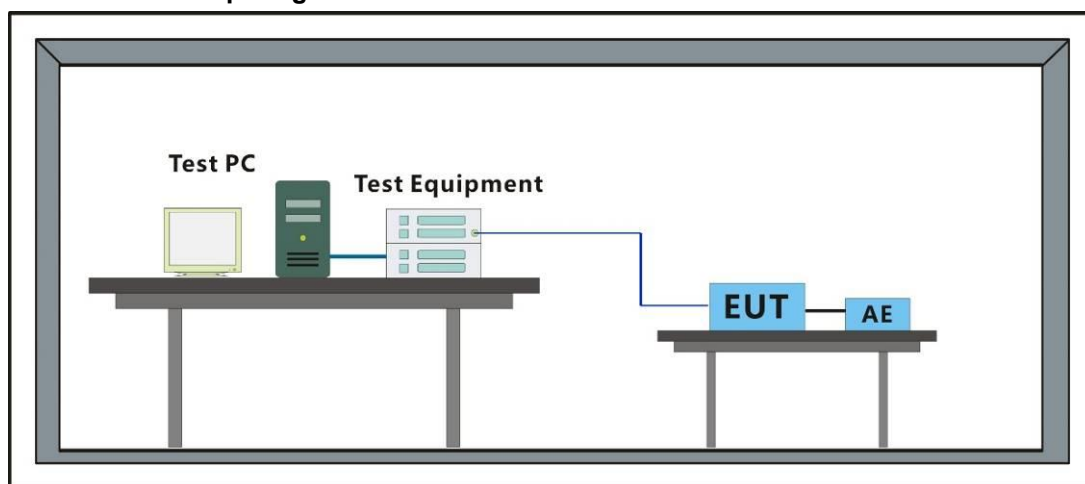

EMC Test Report

Report No:MAX7737B808E

Date:Jun.01,2026

Page 17 of 28

5.5.4 Measurement Procedure and Data

Flicker Test Summary per EN/IEC61000-3-3 (Run time)

Test category: dt,dmax,dc and Pst (European limits)
Test duration (min): 10


Test Margin: 100

Test Result: Pass

Status: Test Completed

Pst, and limit line

European Limits

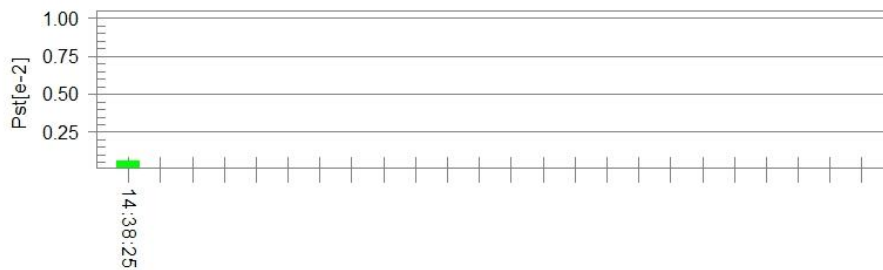

Parameter values recorded during the test:

Vrms at the end of test (Volt): 230.06
T-max (mS): 0
Highest dc (%): 0.00
Highest dmax (%): 0.00
Highest Pst (10 min. period): 0.064

Test limit (mS):	500.0	Pass
Test limit (%):	3.30	Pass
Test limit (%):	4.00	Pass
Test limit:	1.000	Pass

5.6 Harmonic Current Emission

Test Requirement: EN IEC 61000-3-2:2019/A1:2021

Test Method: EN IEC 61000-3-2:2019/A1:2021

Frequency Range: 100Hz to 2kHz


5.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.6 °C Humidity: 65.6 % RH Atmospheric Pressure: 1010 mbar

Test Mode: Normal working mode(Max Loading).

5.6.2 Test Setup Diagram

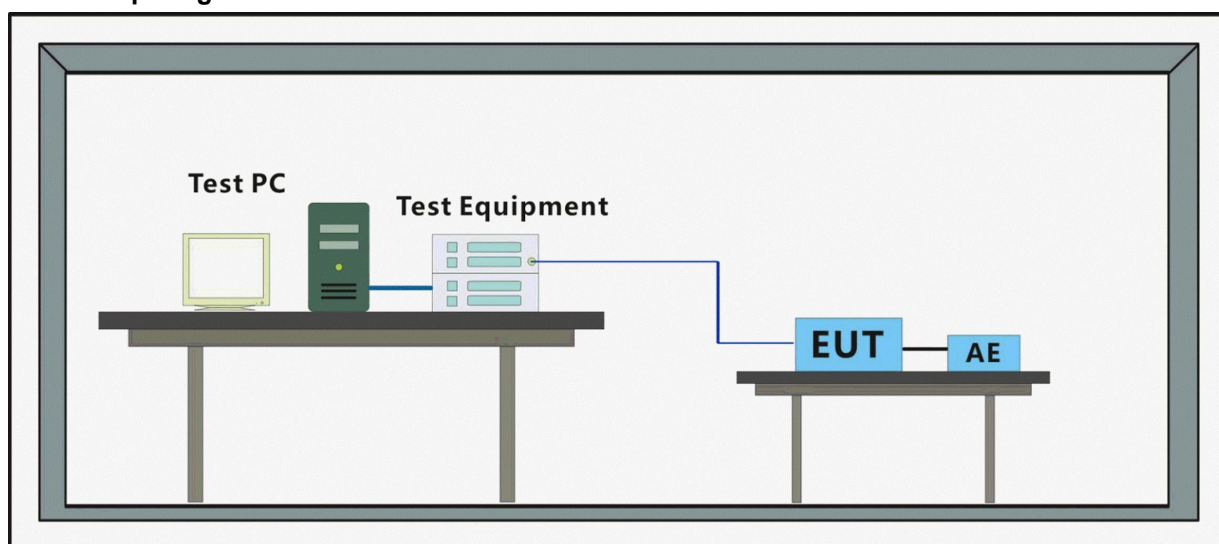

EMC Test Report

Report No:MAX7737B808E

Date:Jun.01,2026

Page 19 of 28

5.6.3 Measurement Data

Ha	Entire measurement (0.320 s = 1 time window(s))						Worst 2.5 min		Average		PASS	FAIL
	Maximum	Window	EN61000-3-2 Class B	Margin in MaxWin	100 to 150%	Ex-ceeded	100 to 150%	Ex-ceeded	Value	Ex-ceeded		
DC	0.0012 A	1	--	--	0	0	n.e.	n.e.	-0.0012 A	0	X	
1	0.2989 A	1	--	--	0	0	n.e.	n.e.	0.2989 A	0	X	
2	0.0002 A	1	--	--	0	0	n.e.	n.e.	0.0002 A	0	X	
3	0.0418 A	1	0.2239 A	81.3 %	0	0	n.e.	n.e.	0.0418 A	0	X	
4	0.0001 A	1	--	--	0	0	n.e.	n.e.	0.0001 A	0	X	
5	0.0263 A	1	0.1251 A	78.9 %	0	0	n.e.	n.e.	0.0263 A	0	X	
6	0.0000 A	1	--	--	0	0	n.e.	n.e.	0.0000 A	0	X	
7	0.0141 A	1	0.0658 A	78.6 %	0	0	n.e.	n.e.	0.0141 A	0	X	
8	0.0000 A	1	--	--	0	0	n.e.	n.e.	0.0000 A	0	X	
9	0.0051 A	1	0.0329 A	84.4 %	0	0	n.e.	n.e.	0.0051 A	0	X	
10	0.0000 A	1	--	--	0	0	n.e.	n.e.	0.0000 A	0	X	
11	0.0007 A	1	0.0230 A	97.1 %	0	0	n.e.	n.e.	0.0007 A	0	X	
12	0.0001 A	1	--	--	0	0	n.e.	n.e.	0.0001 A	0	X	
13	0.0029 A	1	0.0195 A	85.1 %	0	0	n.e.	n.e.	0.0029 A	0	X	
14	0.0000 A	1	--	--	0	0	n.e.	n.e.	0.0000 A	0	X	
15	0.0033 A	1	0.0169 A	80.3 %	0	0	n.e.	n.e.	0.0033 A	0	X	
16	0.0000 A	1	--	--	0	0	n.e.	n.e.	0.0000 A	0	X	
17	0.0039 A	1	0.0149 A	73.9 %	0	0	n.e.	n.e.	0.0039 A	0	X	
18	0.0000 A	1	--	--	0	0	n.e.	n.e.	0.0000 A	0	X	
19	0.0018 A	1	0.0133 A	86.9 %	0	0	n.e.	n.e.	0.0018 A	0	X	
20	0.0000 A	1	--	--	0	0	n.e.	n.e.	0.0000 A	0	X	
21	0.0016 A	1	0.0121 A	86.7 %	0	0	n.e.	n.e.	0.0016 A	0	X	
22	0.0000 A	1	--	--	0	0	n.e.	n.e.	0.0000 A	0	X	
23	0.0015 A	1	0.0110 A	86.4 %	0	0	n.e.	n.e.	0.0015 A	0	X	
24	0.0000 A	1	--	--	0	0	n.e.	n.e.	0.0000 A	0	X	
25	0.0023 A	1	0.0101 A	77.5 %	0	0	n.e.	n.e.	0.0023 A	0	X	
26	0.0000 A	1	--	--	0	0	n.e.	n.e.	0.0000 A	0	X	
27	0.0019 A	1	0.0094 A	80.0 %	0	0	n.e.	n.e.	0.0019 A	0	X	
28	0.0000 A	1	--	--	0	0	n.e.	n.e.	0.0000 A	0	X	
29	0.0017 A	1	0.0087 A	80.2 %	0	0	n.e.	n.e.	0.0017 A	0	X	
30	0.0001 A	1	--	--	0	0	n.e.	n.e.	0.0001 A	0	X	
31	0.0009 A	1	0.0082 A	88.5 %	0	0	n.e.	n.e.	0.0009 A	0	X	
32	0.0000 A	1	--	--	0	0	n.e.	n.e.	0.0000 A	0	X	
33	0.0015 A	1	0.0077 A	80.3 %	0	0	n.e.	n.e.	0.0015 A	0	X	
34	0.0000 A	1	--	--	0	0	n.e.	n.e.	0.0000 A	0	X	
35	0.0014 A	1	0.0072 A	80.3 %	0	0	n.e.	n.e.	0.0014 A	0	X	
36	0.0001 A	1	--	--	0	0	n.e.	n.e.	0.0001 A	0	X	
37	0.0013 A	1	0.0069 A	80.6 %	0	0	n.e.	n.e.	0.0013 A	0	X	
38	0.0001 A	1	--	--	0	0	n.e.	n.e.	0.0001 A	0	X	
39	0.0010 A	1	0.0065 A	84.3 %	0	0	n.e.	n.e.	0.0010 A	0	X	
40	0.0000 A	1	--	--	0	0	n.e.	n.e.	0.0000 A	0	X	

Note: The actual power is less than 75W.

MAXLAB TESTING CO., LTD.


1/F, Building B, Xinshidai GR Park,Shiyan Street, Bao'an District, Shenzhen,Guangdong, 518052, People's Republic of China

Tel: 4008278520 Website: <http://www.imax-lab.com> E-mail: Maxlab@imax-lab.com

6 Immunity Test Results

Performance Criteria Description

- Criterion A:** The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.
- Criterion B:** The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation and from what the user may reasonably expect from the apparatus if used as intended.
- Criterion C:** Temporary loss of function is allowed, provided the function is self recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

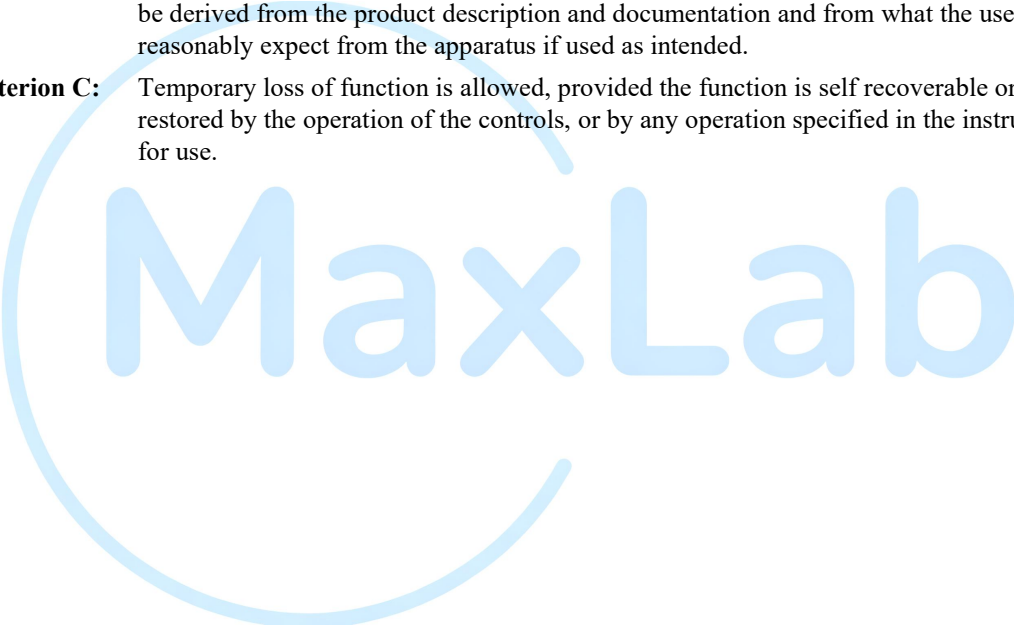MaxLab


EMC Test Report

6.1 Electrostatic Discharge

Test Requirement: EN61547:2009

Test Method: EN 61000-4-2:2009

6.1.1 Test Setup Diagram

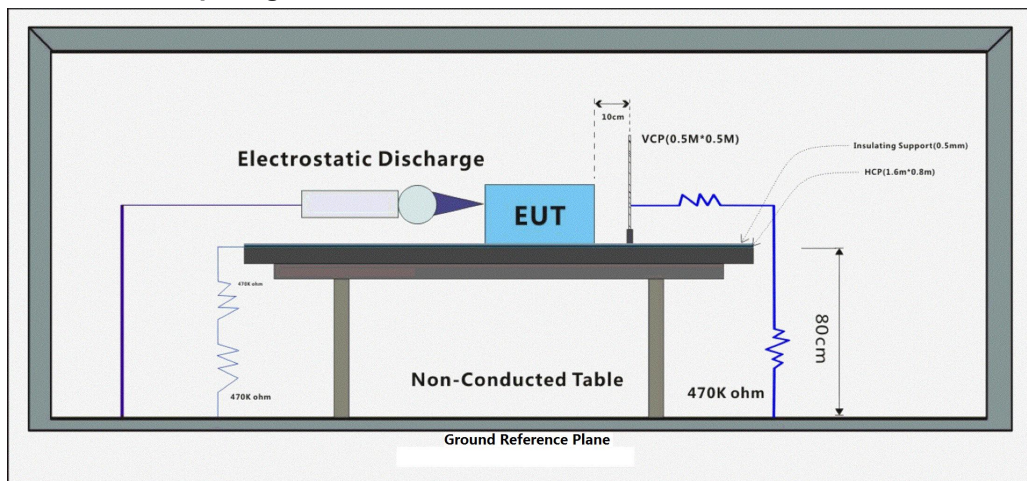

6.1.2 E.U.T. Operation

Operating Environment:

Temperature: 25.6 °C

Humidity: 55.9 % RH

Atmospheric Pressure: 1010 mbar

6.1.3 Test Mode Description

Test Mode: Normal working mode(Max Loading).

6.1.4 Test Condition and Results:

Performance Criterion: B

Discharge Impedance: 330 Ω / 150 pF

Discharge Voltage: Air Discharge: 8 kV; Contact Discharge: 4 kV; VCP/HCP: 4 kV.

Polarity: Positive & Negative

Number of Discharge: Minimum 10 times at each test point

Discharge Mode: Single Discharge

Discharge Period: 1 second minimum

Test Point 1: All insulated enclosure & seams.

Test Point 2: All accessible metal parts of the enclosure.

Test Point 3: All sides.

EMC Test Report

Report No:MAX7737B808E

Date:Jun.01,2026

Page 22 of 28

Discharge type	Level (kV)	Polarity	Test Point	Result / Observations
Air Discharge	8	+	1	A
Air Discharge	8	-	1	A
Contact Discharge	4	+	2	A
Contact Discharge	4	-	2	A
Horizontal Coupling	4	+	3	A
Horizontal Coupling	4	-	3	A
Vertical Coupling	4	+	3	A
Vertical Coupling	4	-	3	A

A: No degradation in the performance of the EUT was observed
N/A:Not applicable




6.2 Continuos RF Eletromagnetic field Disturbance

Test Requirement: EN IEC 55015:2019/A11:2020

Test Method: EN IEC 61000-4-3:2020

2.1.1 Test Setup Diagram

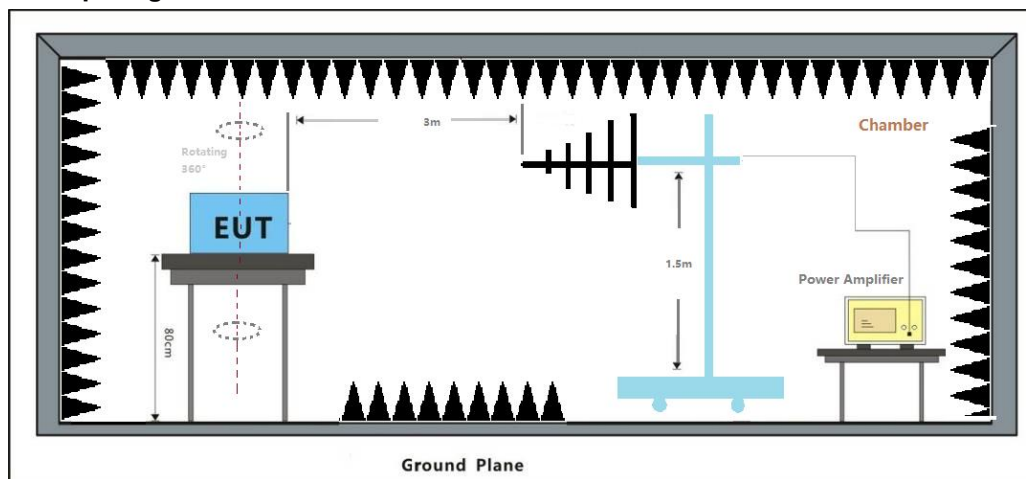

6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 23.7 °C

Humidity: 68.3 % RH

Atmospheric Pressure: 1010 mbar

6.2.2 Test Mode Description

Test Mode: Normal working mode(Max Loading).

6.2.3 Test Condition and Results:

Performance Criterion: A

Step Size: 1%

Frequency Range: 80MHz to 2700MHz

Modulation: 80%, 1kHz Amplitude Modulation

80~2000MHz

Surface	Level (V/m)	Polarization	Dwell time	Result / Observations
AC power port	3	H&V	1s	A
AC power port	3	H&V	1s	A
AC power port	3	H&V	1s	A
AC power port	3	H&V	1s	A

A: No degradation in the performance of the EUT was observed

2.0~2.7GHz

Surface	Level (V/m)	Polarization	Dwell time	Result / Observations
AC power port	1	H&V	1s	A
AC power port	1	H&V	1s	A
AC power port	1	H&V	1s	A
AC power port	1	H&V	1s	A

A: No degradation in the performance of the EUT was observed

EMC Test Report

Report No:MAX7737B808E

Date:Jun.01,2026


Page 24 of 28

6.3 Electrical Fast Transients Burst at AC Mains Power Port

Test Requirement: EN IEC 55014-2:2021

Test Method: EN 61000-4-4:2012

6.3.1 Test Setup Diagram

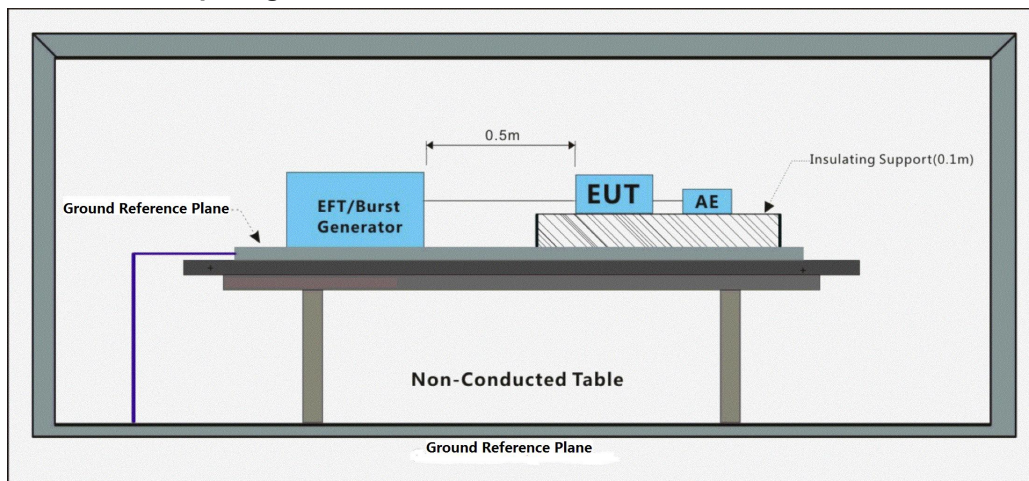

6.3.2 E.U.T. Operation

Operating Environment:

Temperature: 23.8 °C

Humidity: 67.5 % RH

Atmospheric Pressure: 1010 mbar

6.3.3 Test Mode Description

Test Mode: Normal working mode(Max Loading).

6.3.4 Test Condition and Results:

Performance Criterion: B

Repetition Frequency: 5kHz

Burst Period: 300ms

Test Duration: 2 minute per level & polarity

Test Level: 1.0kV

Polarity: Positive & Negative

Test Line	Level (kV)	Polarity	CDN/Clamp	Result / Observations
AC power port	1	+	CDN	A
AC power port	1	-	CDN	A
A: No degradation in the performance of the EUT was observed				

EMC Test Report

Report No:MAX7737B808E

Date:Jun.01,2026


Page 25 of 28

6.4 Surge at AC Mains Power Port

Test Requirement: EN IEC 55015:2019/A11:2020

Test Method: EN 61000-4-5:2014+A1:2017

6.4.1 Test Setup Diagram

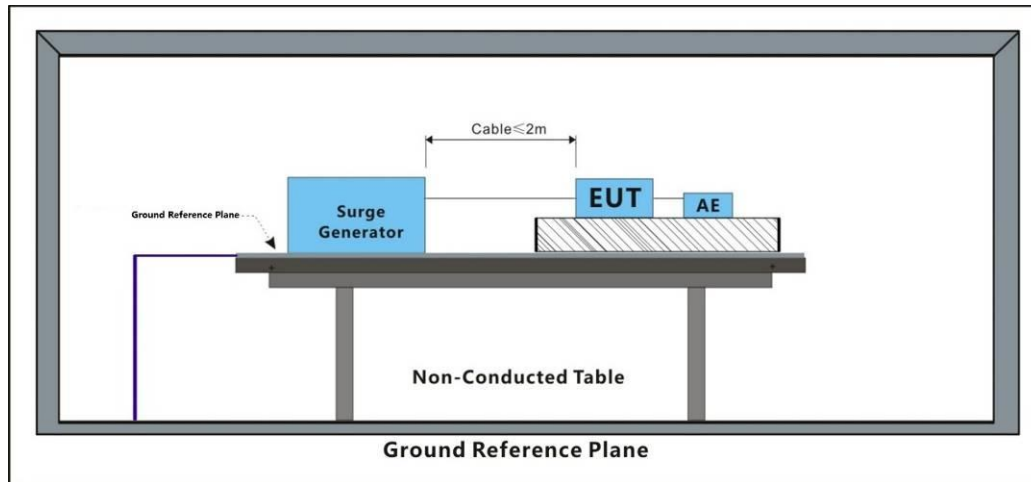

6.4.2 E.U.T. Operation

Operating Environment:

Temperature: 23.7 °C

Humidity: 68.4 % RH

Atmospheric Pressure: 1010 mbar

6.4.3 Test Mode Description

Test Mode: Normal working mode(Max Loading).

6.4.4 Test Condition and Results:

Performance Criterion: B

Interval: 60s between each surge

Test Level: $\pm 1\text{kV}$ Live to Neutral; $\pm 2\text{kV}$ Live, Neutral to Earth

Polarity: Positive & Negative

Generator source impedance: 2Ω

Trigger Mode: Internal

No. of surges: 5 positive at 90° , 5 negative at 270° .

Test Line	Level (kV)	Polarity	Phase (deg)	Result / Observations
L-N	1	+	$0^\circ, 90^\circ, 180^\circ, 270^\circ$	A
L-N	1	-	$0^\circ, 90^\circ, 180^\circ, 270^\circ$	A
L-E	2	+	$0^\circ, 90^\circ, 180^\circ, 270^\circ$	A
L-E	2	-	$0^\circ, 90^\circ, 180^\circ, 270^\circ$	A
N-E	2	+	$0^\circ, 90^\circ, 180^\circ, 270^\circ$	A
N-E	2	-	$0^\circ, 90^\circ, 180^\circ, 270^\circ$	A

A: No degradation in the performance of the EUT was observed

EMC Test Report

Report No:MAX7737B808E

Date:Jun.01,2026


Page 26 of 28

6.5 Conducted Immunity at AC Mains Power Port (150kHz-80MHz)

Test Requirement: EN IEC 55015:2019/A11:2020

Test Method: EN 61000-4-6:2014

2.1.2 Test Setup Diagram

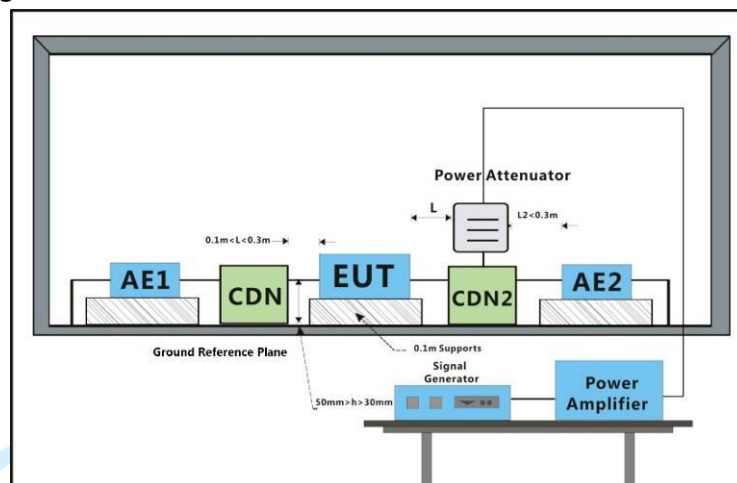

6.5.1 E.U.T. Operation

Operating Environment:

Temperature: 23.7 °C

Humidity: 68.3 % RH

Atmospheric Pressure: 1010 mbar

6.5.2 Test Mode Description

Test Mode: Normal working mode(Max Loading).

6.5.3 Test Condition and Results:

Performance Criterion: A

Step Size: 1%

Frequency Range: 0.15MHz to 230MHz

Modulation: 80%, 1kHz Amplitude Modulation


Cable Port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
AC power port	3	CDN	2s	A
A: No degradation in the performance of the EUT was observed				

6.6 Voltage Dips and Interruptions

Test Requirement: EN IEC 55015:2019/A11:2020

Test Method: EN IEC 61000-4-11:2020

6.6.1 Test Setup Diagram

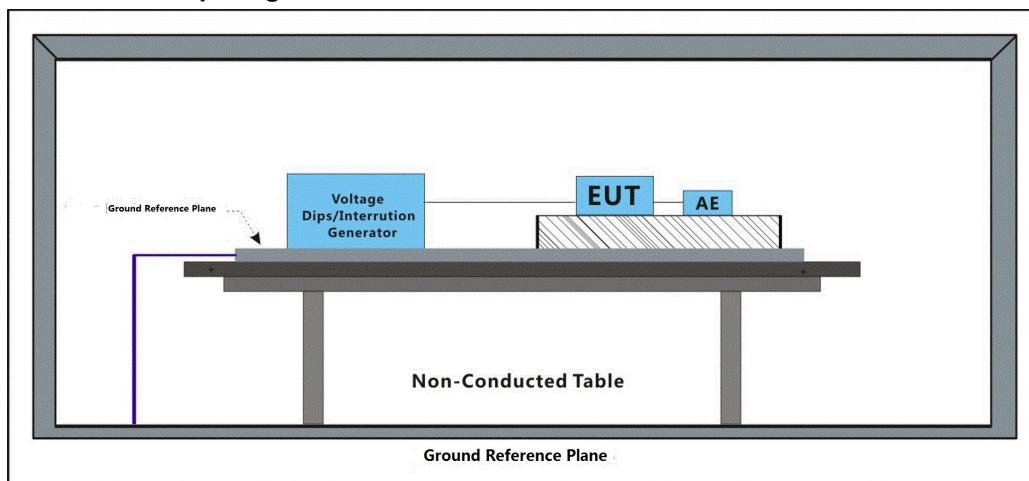

6.6.2 E.U.T. Operation

Operating Environment:

Temperature: 23.8 °C

Humidity: 68.3 % RH

Atmospheric Pressure: 1010 mbar

6.6.3 Test Mode Description

Test Mode: Normal working mode(Max Loading).

6.6.4 Test Condition and Results:

Performance Criterion:

For 50Hz: 0% of UT (Rated Voltage) for 0.5 Cycle: C; 40% of UT for 10 Cycles: C; 70% of UT for 25 Cycles: C.

No. of Dips / Interruptions: 3 per Level

Time between dropout: 10s

Level % UT	Phase (deg)	Duration	No. of Dips / Interruptions	Result / Observations
0	0°	0.5 Cycle for 50Hz	3	A
0	180°	0.5 Cycle for 50Hz	3	A
40	0°	10 Cycles for 50Hz	3	A
40	180°	10 Cycles for 50Hz	3	A
70	0°	25 Cycles for 50Hz	3	A
70	180°	25 Cycles for 50Hz	3	A

A: No degradation in the performance of the EUT was observed

7 EUT Constructional Details (EUT Photos)



--End of the report--