

---

# EMC Test Report

---

Report No.: AGC05443260662EE01

**PRODUCT DESIGNATION** : Rechargeable book light

**BRAND NAME** : N/A

**MODEL NAME** : MO3241

**APPLICANT** : MID OCEAN BRANDS B.V.

**DATE OF ISSUE** : Jul. 02, 2026

**STANDARD(S)** : EN IEC 55015:2019+A11:2020  
EN IEC 61547:2023  
EN IEC 61000-3-2:2019+A1:2021+A2:2024  
EN 61000-3-3:2013+A1:2019+A2:2021

**REPORT VERSION** : V1.0



Attestation of Global Compliance (Shenzhen) Co., Ltd

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>



**REPORT REVISE RECORD**

| Report Version | Revise Time | Issued Date   | Valid Version | Notes           |
|----------------|-------------|---------------|---------------|-----------------|
| V1.0           | /           | Jul. 02, 2026 | Valid         | Initial release |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

## Table of contents

|                                                                                  |           |
|----------------------------------------------------------------------------------|-----------|
| <b>1. General information .....</b>                                              | <b>6</b>  |
| <b>2. Description of Test Configuration.....</b>                                 | <b>7</b>  |
| 2.1. Technical Description of Product .....                                      | 7         |
| 2.2. Description of Support Equipment.....                                       | 7         |
| 2.3. Description of Test Modes .....                                             | 7         |
| <b>3. Summary of Measurement Results and Uncertainty.....</b>                    | <b>8</b>  |
| 3.1. Test Specifications.....                                                    | 8         |
| 3.2. Description of Measurement Results.....                                     | 8         |
| 3.3. Description of Measurement Uncertainty.....                                 | 10        |
| <b>4. Test Facility.....</b>                                                     | <b>11</b> |
| <b>5. Measurement of Conducted Emissions from the AC Mains Power Ports .....</b> | <b>12</b> |
| 5.1. Requirements .....                                                          | 12        |
| 5.2. Block Diagram of Test Setup .....                                           | 12        |
| 5.3. Equipment Details .....                                                     | 13        |
| 5.4. Configuration of the EUT and method of measurement .....                    | 13        |
| 5.5. Test Summary .....                                                          | 14        |
| <b>6. Measurement of Radiated Emissions at Frequencies up to 1 GHz.....</b>      | <b>16</b> |
| 6.1. Requirements .....                                                          | 16        |
| 6.2. Block Diagram of Test Setup .....                                           | 16        |
| 6.3. Equipment Details .....                                                     | 17        |
| 6.4. Configuration of the EUT and method of measurement .....                    | 17        |
| 6.5. Test Summary .....                                                          | 18        |
| <b>7. Measurement of LLAS Radiated Disturbance.....</b>                          | <b>20</b> |
| 7.1. Requirements .....                                                          | 20        |
| 7.2. Block Diagram of Test Setup .....                                           | 20        |
| 7.3. Equipment Details .....                                                     | 21        |
| 7.4. Configuration of the EUT and method of measurement .....                    | 21        |
| 7.5. Test Summary .....                                                          | 22        |
| <b>8. Measurement of Harmonic Current Emissions.....</b>                         | <b>25</b> |
| 8.1. Requirements .....                                                          | 25        |
| 8.2. Block Diagram of Test Setup .....                                           | 26        |
| 8.3. Equipment Details .....                                                     | 26        |
| 8.4. Configuration of the EUT and method of measurement .....                    | 26        |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

|                                                                      |           |
|----------------------------------------------------------------------|-----------|
| 8.5. Test Summary .....                                              | 27        |
| <b>9. Measurement of Voltage Fluctuations and Flicker .....</b>      | <b>28</b> |
| 9.1. Requirements .....                                              | 28        |
| 9.2. Block Diagram of Test Setup .....                               | 28        |
| 9.3. Equipment Details .....                                         | 28        |
| 9.4. Configuration of the EUT and method of measurement .....        | 29        |
| 9.5. Test Summary .....                                              | 29        |
| <b>10. Measurement of Electrostatic discharge .....</b>              | <b>30</b> |
| 10.1. Requirements .....                                             | 30        |
| 10.2. Block Diagram of Test Setup.....                               | 30        |
| 10.3. Equipment Details.....                                         | 31        |
| 10.4. Configuration of the EUT and method of measurement.....        | 31        |
| 10.5. Test Summary .....                                             | 32        |
| <b>11. Measurement of Radio-Frequency Electromagnetic Field.....</b> | <b>33</b> |
| 11.1. Requirements .....                                             | 33        |
| 11.2. Block Diagram of Test Setup.....                               | 34        |
| 11.3. Equipment Details.....                                         | 35        |
| 11.4. Configuration of the EUT and method of measurement.....        | 35        |
| 11.5. Test Summary .....                                             | 36        |
| <b>12. Measurement of Radio-frequency common mode .....</b>          | <b>37</b> |
| 12.1. Requirements .....                                             | 37        |
| 12.2. Block Diagram of Test Setup.....                               | 37        |
| 12.3. Equipment Details.....                                         | 38        |
| 12.4. Configuration of the EUT and method of measurement.....        | 38        |
| 12.5. Test Summary .....                                             | 39        |
| <b>13. Measurement of Fast Transients.....</b>                       | <b>40</b> |
| 13.1. Requirements .....                                             | 40        |
| 13.2. Block Diagram of Test Setup.....                               | 40        |
| 13.3. Equipment Details.....                                         | 41        |
| 13.4. Configuration of the EUT and method of measurement.....        | 41        |
| 13.5. Test Summary .....                                             | 42        |
| <b>14. Measurement of Surges.....</b>                                | <b>43</b> |
| 14.1. Requirements .....                                             | 43        |
| 14.2. Block Diagram of Test Setup.....                               | 44        |
| 14.3. Equipment Details.....                                         | 44        |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

|            |                                                            |           |
|------------|------------------------------------------------------------|-----------|
| 14.4.      | Configuration of the EUT and method of measurement.....    | 44        |
| 14.5.      | Test Summary .....                                         | 45        |
| <b>15.</b> | <b>Measurement of Voltage dips and interruptions .....</b> | <b>46</b> |
| 15.1.      | Requirements .....                                         | 46        |
| 15.2.      | Block Diagram of Test Setup.....                           | 46        |
| 15.3.      | Equipment Details.....                                     | 47        |
| 15.4.      | Configuration of the EUT and method of measurement.....    | 47        |
| 15.5.      | Test Summary .....                                         | 47        |
| <b>16.</b> | <b>Measurement of Power Frequency Magnetic Field .....</b> | <b>48</b> |
| 16.1.      | Requirements .....                                         | 48        |
| 16.2.      | Block Diagram of Test Setup.....                           | 48        |
| 16.3.      | Equipment Details.....                                     | 49        |
| 16.4.      | Configuration of the EUT and method of measurement.....    | 49        |
| 16.5.      | Test Summary .....                                         | 50        |
| <b>17.</b> | <b>Photographs of Test Setup.....</b>                      | <b>51</b> |
| <b>18.</b> | <b>Photographs of EUT.....</b>                             | <b>56</b> |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

## 1. General information

|                                                                                                   |                                                                                      |
|---------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Applicant                                                                                         | MID OCEAN BRANDS B.V.                                                                |
| Address                                                                                           | Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong. |
| Manufacturer                                                                                      | MID OCEAN BRANDS B.V.                                                                |
| Address                                                                                           | Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong. |
| Factory                                                                                           | MID OCEAN BRANDS B.V.                                                                |
| Address                                                                                           | Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong. |
| Product Designation                                                                               | Rechargeable book light                                                              |
| Brand Name                                                                                        | N/A                                                                                  |
| Test Model                                                                                        | MO3241                                                                               |
| Series Model(s)                                                                                   | N/A                                                                                  |
| Difference Description                                                                            | N/A                                                                                  |
| Deviation from Standard                                                                           | No any deviation from the test method                                                |
| Date of receipt of test item                                                                      | Jun. 25, 2026                                                                        |
| Date of Test                                                                                      | Jun. 25, 2026 to Jul. 02, 2026                                                       |
| Test Result                                                                                       | Pass                                                                                 |
| Test Report Form No                                                                               | AGCER-EMC-GEN-V1                                                                     |
| Note: The test results of this report relate only to the tested sample identified in this report. |                                                                                      |

Prepared By



Sam Zheng  
(Project Engineer)

Jul. 02, 2026

Reviewed By



Jack Gui  
(Reviewer)

Jul. 02, 2026

Approved By



Angela Li  
(Authorized Officer)

Jul. 02, 2026

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std &amp; Tech Co., Ltd


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

## 2. Description of Test Configuration

### 2.1. Technical Description of Product

|                            |                                        |
|----------------------------|----------------------------------------|
| Test arrangements of EUT   | Table-top                              |
| Hardware Version           | N/A                                    |
| Software Version           | N/A                                    |
| Highest Internal Frequency | Less than 108MHz                       |
| EUT Input Rating           | DC 5V by adapter or DC 3.7V by battery |
| EUT Output Rating          | N/A                                    |
| Adapter Information        | N/A                                    |
| Battery Information        | 3.7V, 300mAh 1.11Wh                    |

#### Connection Diagram of Host System



#### I/O Port Information (☒Applicable ☐Not Applicable)

| Port Type  | Input/Output | Number | Cable Description |
|------------|--------------|--------|-------------------|
| USB Type-C | In           | 1      | 0.3m, unshielded  |

### 2.2. Description of Support Equipment

| Device Type | Manufacturer | Model Name | Serial No. | Data Cable | Power Cable |
|-------------|--------------|------------|------------|------------|-------------|
| Adapter     | Apple        | A2452      | --         | --         | --          |

### 2.3. Description of Test Modes

| No. | Test Mode Description                        |
|-----|----------------------------------------------|
| 1   | Lighting mode with adapter (100% brightness) |
| 2   | Lighting mode with battery (100% brightness) |

All modes have been tested for EMI and the worst mode is finally reflected.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

### 3. Summary of Measurement Results and Uncertainty

#### 3.1. Test Specifications

|                                       |                                                                                                                                                                                                                                                               |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EN IEC 55015:2019+A11:2020            | Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment                                                                                                                                           |
| EN IEC 61547:2023                     | Equipment for general lighting purposes - EMC immunity requirements                                                                                                                                                                                           |
| EN IEC 61000-3-2:2019+A1:2021+A2:2024 | Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions (equipment input current 16 A per phase)                                                                                                                       |
| EN 61000-3-3:2013+A1:2019+A2:2021     | Electromagnetic compatibility (EMC) Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current $\leq 16$ A per phase and not subject to conditional connection |

#### 3.2. Description of Measurement Results

| Test items                                        | Test Standard(s)            | Verdict |
|---------------------------------------------------|-----------------------------|---------|
| Conducted emissions from the AC mains power ports | EN IEC 55015                | Pass    |
| Radiated emissions at frequencies up to 1 GHz     | EN IEC 55015                | Pass    |
| Magnetic field induced current                    | EN IEC 55015                | Pass    |
| Harmonic current emissions                        | EN IEC 61000-3-2            | Pass    |
| Voltage fluctuations and flicker                  | EN 61000-3-3                | Pass    |
| Electrostatic discharge                           | IEC 61000-4-2 <sup>a</sup>  | Pass    |
| Radio-frequency electromagnetic field             | IEC 61000-4-3 <sup>a</sup>  | Pass    |
| Fast transients                                   | IEC 61000-4-4 <sup>a</sup>  | Pass    |
| Surges                                            | IEC 61000-4-5 <sup>a</sup>  | Pass    |
| Radio-frequency common mode (Injected currents)   | IEC 61000-4-6 <sup>a</sup>  | Pass    |
| Power-frequency magnetic field                    | IEC 61000-4-8 <sup>a</sup>  | Pass    |
| Voltage dips and interruptions                    | IEC 61000-4-11 <sup>a</sup> | Pass    |

Note:

a. The applicable versions of the basic standards are defined in the standard which listed in the test specification.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

Performance table

| Performance Criteria for Immunity                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Performance criterion A                                                                                                                                                                                                                              | During the test, no change of the luminous intensity shall be observed and the regulating control, if any, shall operate during the test as intended.                                                                                                                                                                                                                                                                    |
| Performance criterion B                                                                                                                                                                                                                              | During the test, the luminous intensity may change to any value. After the test, the luminous intensity shall be restored to its initial value within 1 min (30 min for high pressure gas discharge lamps). Regulating controls need not function during the test, but after the test, the mode of the control shall be the same as before the test, provided that during the test no mode changing commands were given. |
| Performance criterion C                                                                                                                                                                                                                              | During and after the test, any change of the luminous intensity is allowed and the light source(s) may be extinguished. After the test, within 30 min, all functions shall return to normal, if necessary by temporary interruption of the mains supply and/or operating the regulating control.                                                                                                                         |
| The following additional requirement applies to lighting equipment incorporating a starting device: after the test, the lighting equipment is switched off for 30 min and back on again. The lighting equipment shall start and operate as intended. |                                                                                                                                                                                                                                                                                                                                                                                                                          |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

### 3.3. Description of Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

| Item                                              | Measurement Uncertainty    |
|---------------------------------------------------|----------------------------|
| Conducted emissions from the AC mains power ports | $U_c = \pm 2.9 \text{ dB}$ |
| Radiated emissions at frequencies up to 1 GHz     | $U_c = \pm 3.9 \text{ dB}$ |
| Radiated emissions at frequencies above 1 GHz     | $U_c = \pm 4.9 \text{ dB}$ |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>

#### 4. Test Facility

Laboratory name: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Laboratory Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

The test facility is recognized, certified, or accredited by the following organizations:

**CNAS-Lab Code: L5488**

Attestation of Global Compliance (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories).

**A2LA-Lab Cert. No.: 5054.02**

Attestation of Global Compliance (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This laboratory also meets the requirements of any additional program requirements in the Electrical field.

**FCC-Registration No.: 975832**

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

**IC-Registration No.: 24842**

**CAB identifier: CN0063**

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

**VCCI Membership No.: 4112**

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered in accordance with VCCI Council Rules.

VCCI Registration No. C-20098 for conducted emissions at AC main power ports

VCCI Registration No. T-20102 for conducted emissions at telecommunication ports

VCCI Registration No. R-20136 for radiated emissions below 1GHz

VCCI Registration No. G-20132 for radiated emissions above 1GHz

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

## 5. Measurement of Conducted Emissions from the AC Mains Power Ports

### 5.1. Requirements


Requirements for conducted emissions, low voltage AC mains port

| Network device | Detector type/ bandwidth | Frequency Range (MHz) | Limits dB(μV) | Measurement specifications                                                                                                                                |
|----------------|--------------------------|-----------------------|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| AMN            | Quasi-peak/ 9kHz         | 0.009 to 0.05         | 110           | Instrumentation: CISPR 16-1-1, Clauses 4, 5 and 7<br>Networks: CISPR 16-1-2, Clause 4<br>Method: CISPR 16-2-1, Clause 7<br>Set-up: CISPR 16-2-1, Clause 7 |
|                |                          | 0.05 to 0.15          | 90 to 80      |                                                                                                                                                           |
|                |                          | 0.15 to 0.5           | 66 to 56      |                                                                                                                                                           |
|                |                          | 0.5 to 5              | 56            |                                                                                                                                                           |
|                |                          | 5 to 30               | 60            |                                                                                                                                                           |
|                | Average/ 9kHz            | 0.15 to 0.5           | 56 to 46      |                                                                                                                                                           |
|                |                          | 0.5 to 5              | 46            |                                                                                                                                                           |
|                |                          | 5 to 30               | 50            |                                                                                                                                                           |

**Note:**

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the ranges 50kHz to 150kHz and 150kHz to 0.5MHz.
3. For lighting equipment incorporating exclusively electrodeless lamps, the limit in the frequency range of 2.2MHz to 3.0 MHz is 73 dB(μV) quasi-peak and 63 dB(μV) average.

### 5.2. Block Diagram of Test Setup

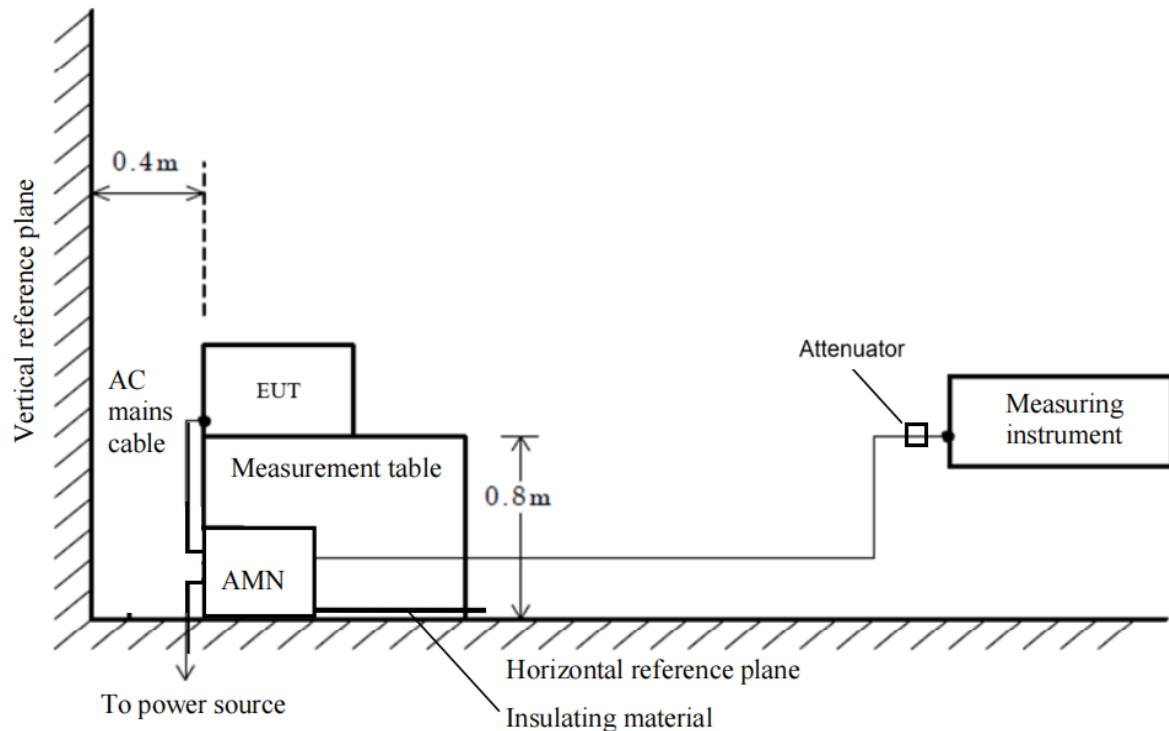

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

### 5.3. Equipment Details

#### Measuring Instruments

| Instruments No. | Instruments              | Manufacturer  | Model     | S/N    | Cal. Date  | Cal. Due   |
|-----------------|--------------------------|---------------|-----------|--------|------------|------------|
| AGC-EM-E116     | Test Receiver            | R&S           | ESCI      | 100034 | 2026-05-20 | 2027-05-19 |
| AGC-EM-E023     | Artificial Mains Network | R&S           | ESH2-Z5   | 100086 | 2026-05-19 | 2027-05-18 |
| AGC-EM-A171     | Attenuator               | Mini-Circuits | UNAT-10A+ | N/A    | 2026-01-13 | 2028-01-12 |

#### Measuring Software

| Software No. | Software Name | Manufacturer | Details                           |
|--------------|---------------|--------------|-----------------------------------|
| AGC-EM-S001  | ES-K1         | R&S          | For EMC Measurement, Version 1.71 |

### 5.4. Configuration of the EUT and method of measurement

- The EUT was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, the EUT was placed on the top surface of a measurement table, 0.8 m high from the horizontal reference plane, and was positioned at a distance of 0.4 m away from the vertical reference plane. When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 10 cm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per CISPR 16-2-1.
- All I/O cables were positioned to simulate typical actual usage as per CISPR 16-2-1.
- The EMI receiver measured the emission levels emanating from the EUT into the AC Mains through an Artificial Mains Network (AMN) and an attenuator used on the front end of the EMI receiver. Testing included measurements on all live and neutral lines.
- The more description of the tests, the test methods, and the test set-ups are given in the applicable test standard.
- Record at least six highest emissions relative to the limits at each frequency of interest unless the emission is 10 dB or greater below the limit.
- A conducted emission is calculated by the following equation:
  - Measurement Level (dB $\mu$ V) = Receiver reading (dB $\mu$ V) + Tansd (dB)
  - Transd(dB)= AMN Factor(dB)+Cable Loss(dB)+Attenuation(dB)
  - Margin= Limit-Level


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 5.5. Test Summary

|               |            |                   |          |
|---------------|------------|-------------------|----------|
| Test Engineer | Carl Duan  | Temperature       | 23.4 °C  |
| Test Date     | 2026-06-26 | Air Pressure      | 985 Mbar |
| Worst Mode    | Mode 1     | Relative Humidity | 59.2 %   |
| Verdict       | Pass       |                   |          |

### Test graph and data for Conducted Emission

Test Mode: Mode 1

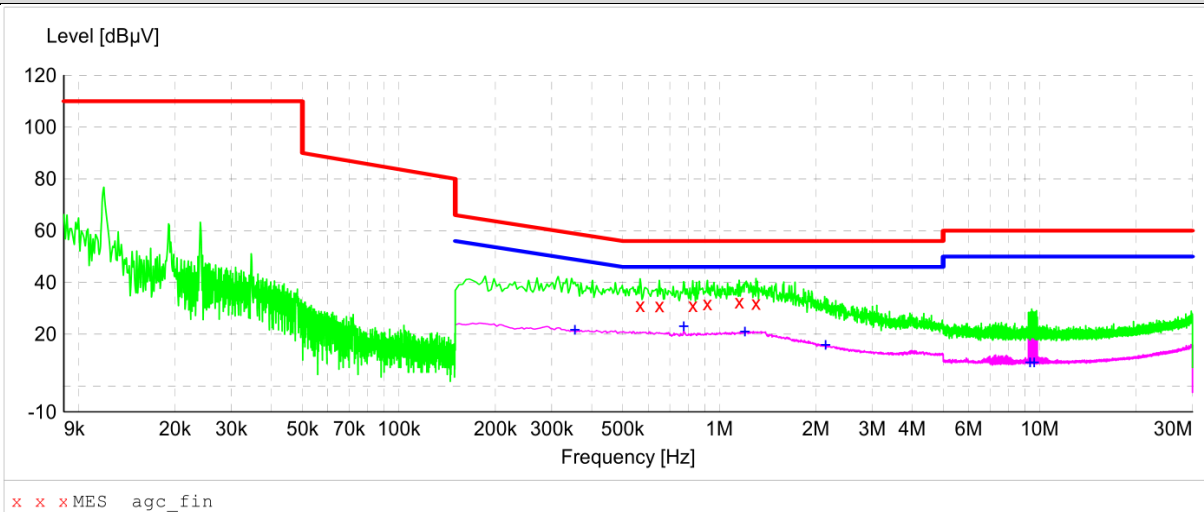


| Frequency [MHz] | Level [dBμV] | Factor [dB] | Limit [dBμV] | Margin [dB] | Detector | Line |
|-----------------|--------------|-------------|--------------|-------------|----------|------|
| 0.566000        | 31.2         | 10.3        | 56.0         | 24.8        | QP       | L1   |
| 0.650000        | 31.1         | 10.3        | 56.0         | 24.9        | QP       | L1   |
| 0.826000        | 31.2         | 10.4        | 56.0         | 24.8        | QP       | L1   |
| 0.918000        | 31.8         | 10.4        | 56.0         | 24.2        | QP       | L1   |
| 1.154000        | 32.6         | 10.4        | 56.0         | 23.4        | QP       | L1   |
| 1.302000        | 32.0         | 10.4        | 56.0         | 24.0        | QP       | L1   |
| 0.354000        | 21.6         | 10.3        | 48.9         | 27.3        | AV       | L1   |
| 0.774000        | 22.9         | 10.3        | 46.0         | 23.1        | AV       | L1   |
| 1.202000        | 20.9         | 10.4        | 46.0         | 25.1        | AV       | L1   |
| 2.146000        | 15.8         | 10.5        | 46.0         | 30.2        | AV       | L1   |
| 9.330000        | 9.0          | 12.1        | 50.0         | 41.0        | AV       | L1   |
| 9.610000        | 9.0          | 12.1        | 50.0         | 41.0        | AV       | L1   |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## Test graph and data for Conducted Emission

## Test Mode: Mode 1

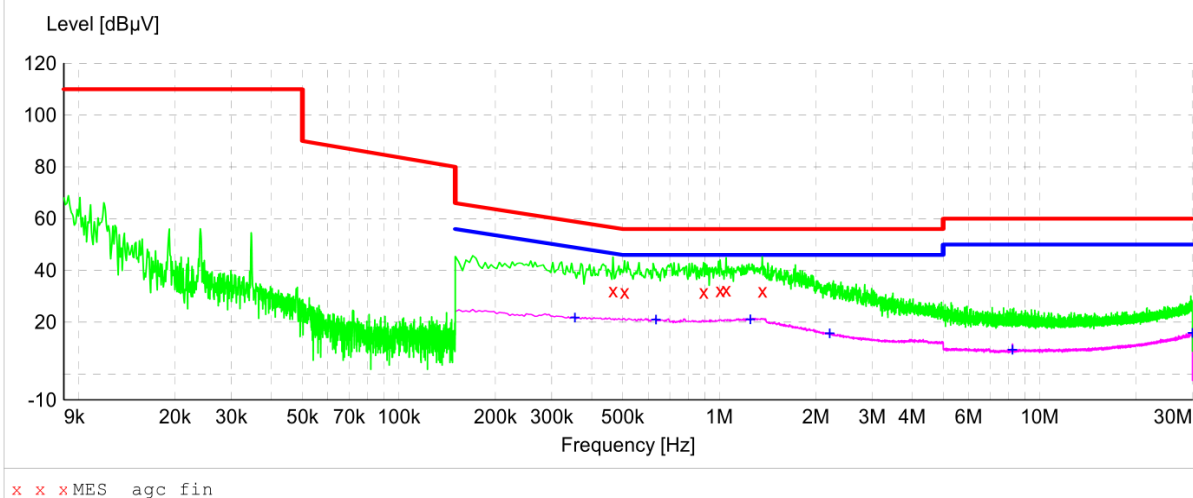

| Frequency [MHz] | Level [dBμV] | Factor [dB] | Limit [dBμV] | Margin [dB] | Detector | Line |
|-----------------|--------------|-------------|--------------|-------------|----------|------|
| 0.466000        | 32.2         | 10.3        | 56.6         | 24.4        | QP       | N    |
| 0.506000        | 31.7         | 10.3        | 56.0         | 24.3        | QP       | N    |
| 0.894000        | 31.7         | 10.4        | 56.0         | 24.3        | QP       | N    |
| 1.006000        | 32.3         | 10.4        | 56.0         | 23.7        | QP       | N    |
| 1.050000        | 32.6         | 10.4        | 56.0         | 23.4        | QP       | N    |
| 1.362000        | 32.1         | 10.4        | 56.0         | 23.9        | QP       | N    |
| 0.354000        | 21.7         | 10.3        | 48.9         | 27.2        | AV       | N    |
| 0.634000        | 20.9         | 10.3        | 46.0         | 25.1        | AV       | N    |
| 1.250000        | 21.0         | 10.4        | 46.0         | 25.0        | AV       | N    |
| 2.210000        | 15.6         | 10.5        | 46.0         | 30.4        | AV       | N    |
| 8.230000        | 9.2          | 11.8        | 50.0         | 40.8        | AV       | N    |
| 29.986000       | 15.8         | 18.1        | 50.0         | 34.2        | AV       | N    |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

## 6. Measurement of Radiated Emissions at Frequencies up to 1 GHz

### 6.1. Requirements


Requirements for radiated emissions at frequencies up to 1 GHz at 3m distance

| Test facility | Detector type/<br>bandwidth | Frequency<br>Range (MHz) | Limits<br>dB( $\mu$ V/m) | Measurement specifications                                                        |
|---------------|-----------------------------|--------------------------|--------------------------|-----------------------------------------------------------------------------------|
| SAC           | Quasi-peak/<br>120kHz       | 30 to 230                | 40                       | Instrumentation: CISPR 16-1-1, Clauses 4, 5<br>Antennas: CISPR 16-1-4, Clause 4.5 |
|               |                             | 230 to 1000              | 47                       | Test Site: CISPR 16-1-4, Clause 6<br>Method: CISPR 16-2-3, Clause 7.6             |

**Note:**

- The lower limit shall apply at the transition frequency.

### 6.2. Block Diagram of Test Setup

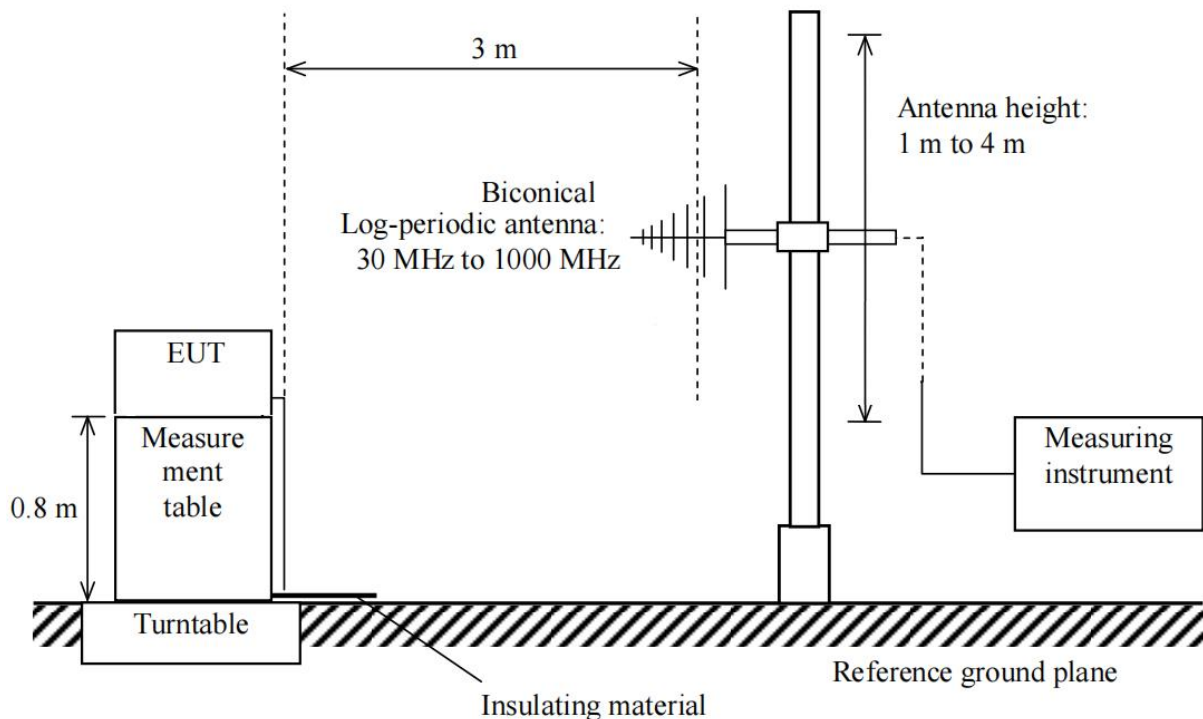

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

### 6.3. Equipment Details

#### Measuring Instruments

| Instruments No. | Instruments   | Manufacturer | Model      | S/N    | Cal. Date  | Cal. Due   |
|-----------------|---------------|--------------|------------|--------|------------|------------|
| AGC-EM-E046     | Test Receiver | R&S          | ESCI       | 100096 | 2026-01-13 | 2027-01-12 |
| AGC-EM-E001     | Antenna       | SCHWARZBECK  | VULB9168   | D69250 | 2025-03-14 | 2027-03-13 |
| AGC-EM-A138     | Attenuator    | East sheep   | LM-XX-6-5W | N/A    | 2025-05-16 | 2027-05-15 |

#### Measuring Software

| Software No. | Software Name | Manufacturer | Details                             |
|--------------|---------------|--------------|-------------------------------------|
| AGC-EM-S003  | EZ-EMC        | FARA         | For EMC Measurement, Version RA-03A |


### 6.4. Configuration of the EUT and method of measurement

- The EUT was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, the EUT was placed on the top surface of a measurement table, 0.8 m high from the horizontal reference plane. When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 10 cm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per CISPR 16-2-3.
- All I/O cables were positioned to simulate typical actual usage as per CISPR 16-2-3.
- The maximum receiving level of radiated emissions from the EUT was measured while the turntable was rotated from 0° to 360° and the antenna height was scanned between 1 m and 4 m. The cables were laid out to attain the maximum level of radiated emissions.
- The more description of the tests, the test methods, and the test set-ups are given in the applicable test standard.
- Record at least six highest emissions relative to the limits at each frequency of interest unless the emission is 10 dB or greater below the limit.
- A radiated emission is calculated by the following equation:
  - Measurement Level dB(μV/m) = Receiver reading dB(μV) + Factor(dB/m)
  - Factor(dB/m) = Antenna Factor(dB/m) + Cable Loss(dB)
  - Margin= Limit-Level

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 6.5. Test Summary


|               |            |                   |          |
|---------------|------------|-------------------|----------|
| Test Engineer | Alex Yang  | Temperature       | 21.3 °C  |
| Test Date     | 2026-07-01 | Air Pressure      | 985 Mbar |
| Worst Mode    | Mode 1     | Relative Humidity | 52.5 %   |
| Verdict       | Pass       |                   |          |

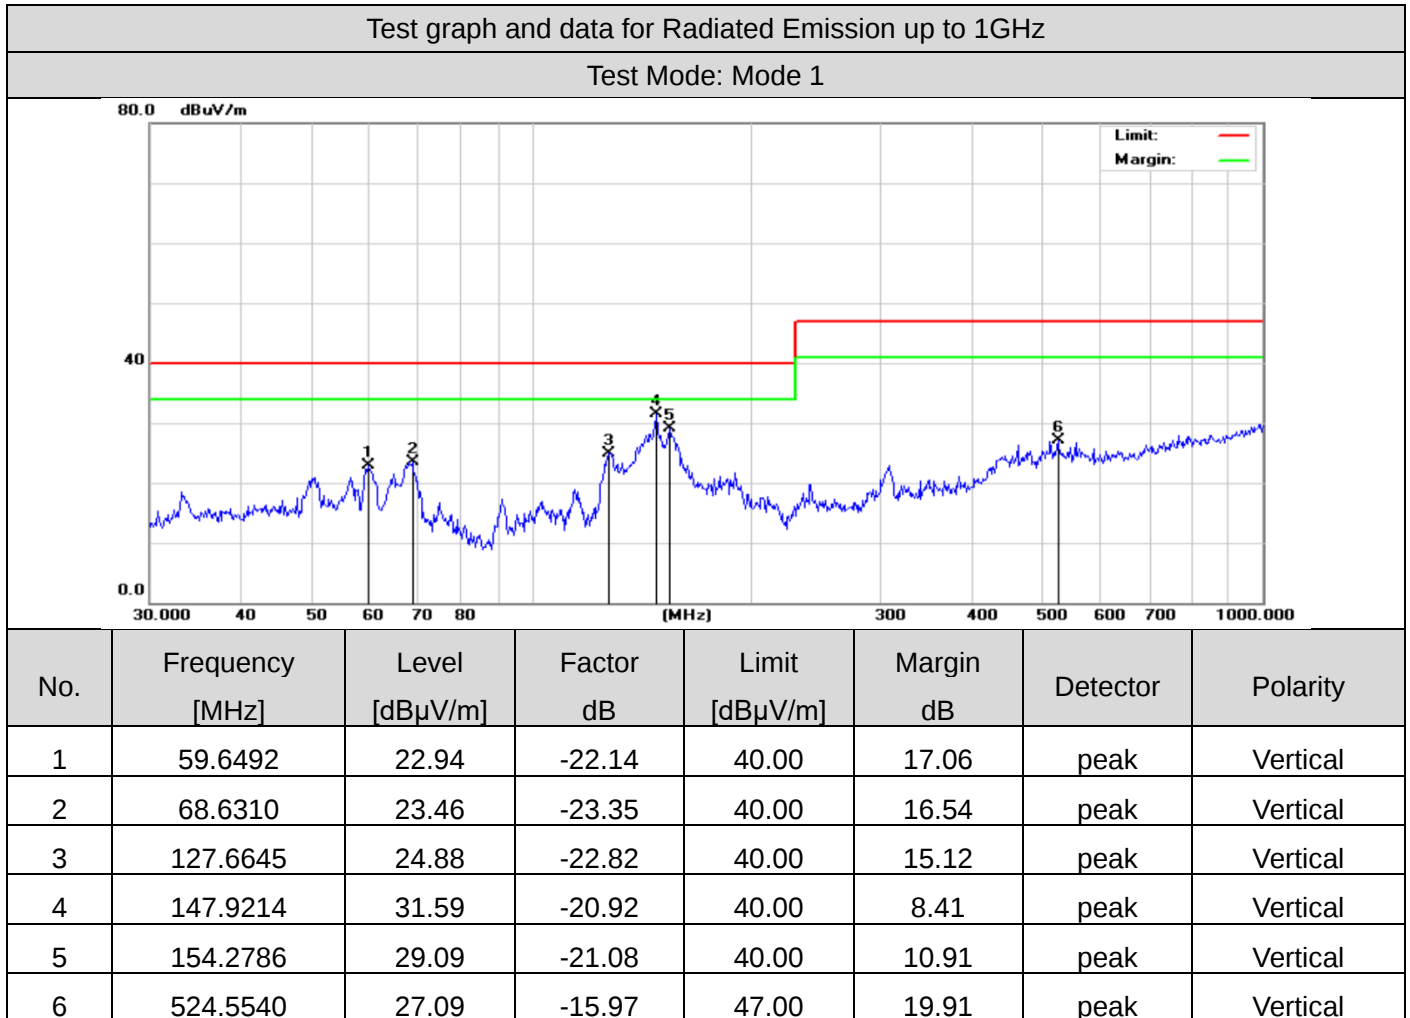

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test graph and data for Radiated Emission up to 1GHz

Test Mode: Mode 1

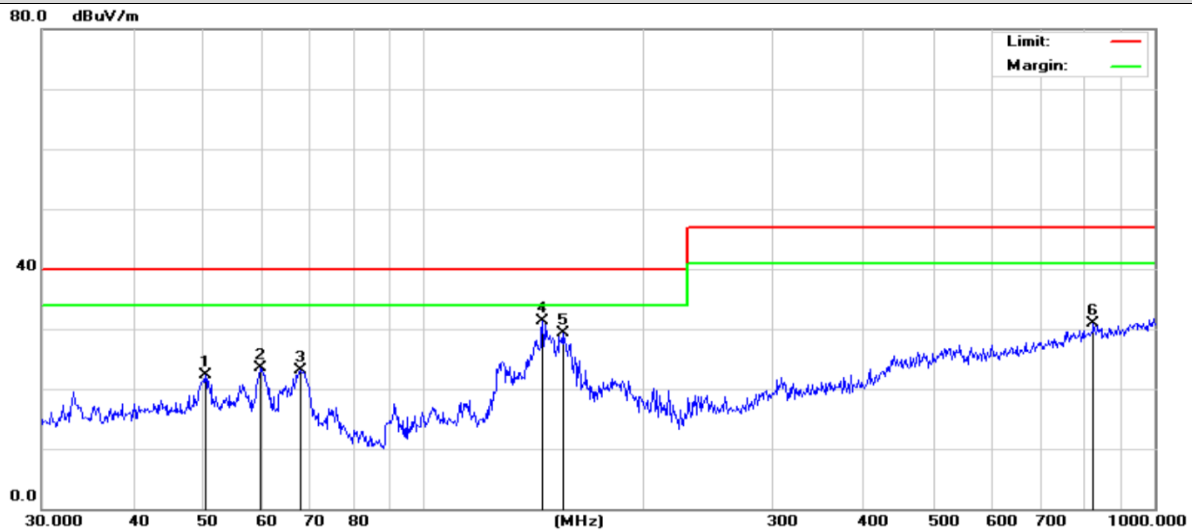

| No. | Frequency<br>[MHz] | Level<br>[dBuV/m] | Factor<br>dB | Limit<br>[dBuV/m] | Margin<br>dB | Detector | Polarity |
|-----|--------------------|-------------------|--------------|-------------------|--------------|----------|----------|
| 1   | 50.2324            | 22.39             | -21.81       | 40.00             | 17.61        | peak     | Vertical |
| 2   | 59.6493            | 23.48             | -22.14       | 40.00             | 16.52        | peak     | Vertical |
| 3   | 67.6751            | 23.14             | -23.19       | 40.00             | 16.86        | peak     | Vertical |
| 4   | 145.3506           | 31.33             | -21.05       | 40.00             | 8.67         | peak     | Vertical |
| 5   | 154.8204           | 29.39             | -21.08       | 40.00             | 10.61        | peak     | Vertical |
| 6   | 824.5968           | 30.88             | -10.21       | 47.00             | 16.12        | peak     | Vertical |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 7. Measurement of LLAS Radiated Disturbance

### 7.1. Requirements


LLAS radiated disturbance limits in the frequency range 9 kHz to 30 MHz

| Loop antenna diameter | Detector type/ bandwidth | Frequency Range (kHz) | Limits dB( $\mu$ A)     | Measurement specifications                                                                                   |
|-----------------------|--------------------------|-----------------------|-------------------------|--------------------------------------------------------------------------------------------------------------|
| 2 m                   | Quasi-peak/ 200Hz        | 9 to 70               | 88                      | Instrumentation: CISPR 16-1-4, Clauses 4<br>Method: CISPR 16-2-3, Clause 7<br>Set-up: CISPR 16-2-3, Clause 7 |
|                       |                          | 70 to 150             | 88 to 58 <sup>a</sup>   |                                                                                                              |
|                       | Quasi-peak/ 9kHz         | 150 to 3.0            | 58 to 22 <sup>a b</sup> |                                                                                                              |
|                       |                          | 3.0 to 30             | 22                      |                                                                                                              |

Note:

- Decreasing linearly with the logarithm of the frequency.
- For lighting equipment incorporating exclusively electrodeless lamps, the limit in the frequency range of 2.2 MHz to 3.0 MHz is 58 dB( $\mu$ A).

### 7.2. Block Diagram of Test Setup

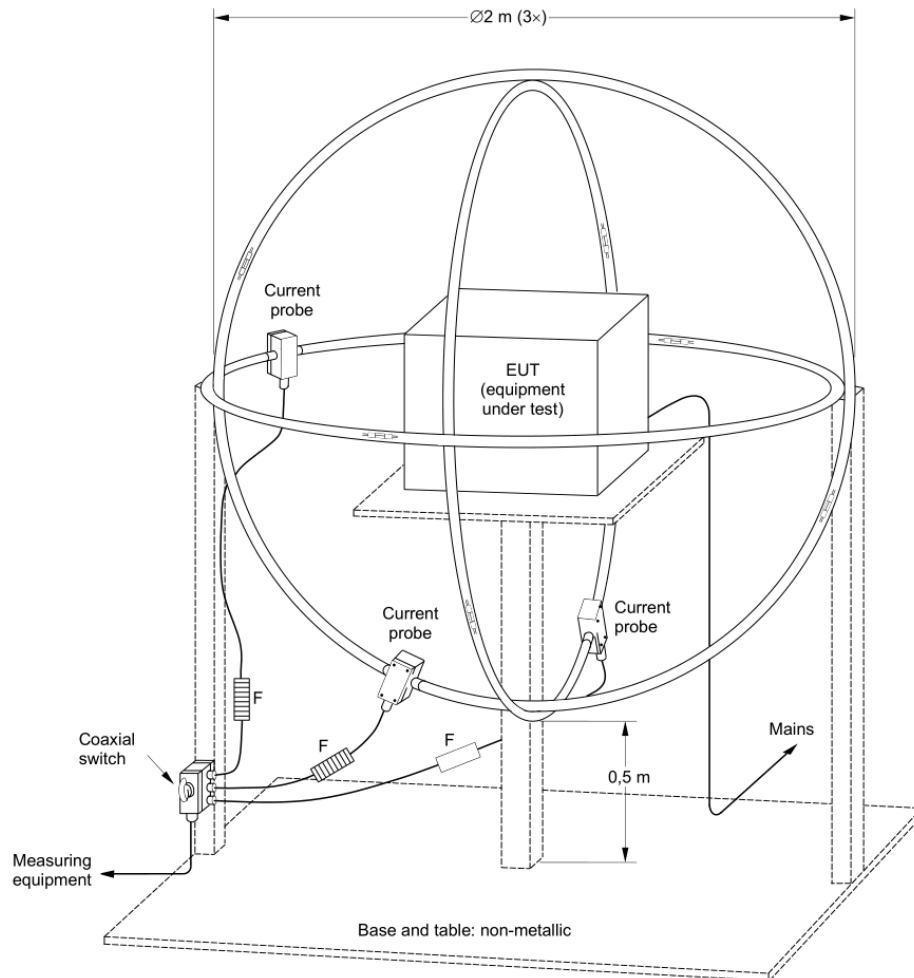

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

### 7.3. Equipment Details

Measuring Instruments

| Instruments No. | Instruments         | Manufacturer | Model      | S/N    | Cal. Date  | Cal. Due   |
|-----------------|---------------------|--------------|------------|--------|------------|------------|
| AGC-EM-E031     | Triple Loop Antenna | LAPLACE      | RF300      | 9070   | 2026-05-19 | 2027-05-18 |
| AGC-EM-A130     | Attenuator          | East sheep   | LM-XX-6-5W | N/A    | 2025-07-18 | 2027-07-17 |
| AGC-EM-E116     | Test Receiver       | R&S          | ESCI       | 100034 | 2026-05-20 | 2027-05-19 |

Measuring Software

| Software No. | Software Name | Manufacturer | Details                           |
|--------------|---------------|--------------|-----------------------------------|
| AGC-EM-S001  | ES-K1         | R&S          | For EMC Measurement, Version 1.71 |

### 7.4. Configuration of the EUT and method of measurement

- The EUT is placed in the center of the LLAS. The current induced by the magnetic field strength from the EUT into each of the three large loop antennas of the LLAS is measured by connecting the current probe of the large loop antenna to a measuring receiver (or equivalent). During the measurements, the EUT remains in a fixed position.
- The currents in the three large loop antennas, originating from the three mutually orthogonal magnetic field strength components, are measured in sequence. Each current level measured shall comply with the emission limit, expressed in dB(μA), as specified in the product standard. The emission limit shall apply for an LLAS having large loop antennas with the standardized diameter of 2 m.
- The more description of the tests, the test methods, and the test set-ups are given in the applicable test standard.
- Record at least six highest emissions relative to the limits at each frequency of interest unless the emission is 10 dB or greater below the limit.
- A conducted emission is calculated by the following equation:
  - Measurement Level (dBμV) = Receiver reading (dBμV) + Tansd (dB)
  - Transd(dB)= Antenna Factor(dB)+Cable Loss(dB)+Attenuation(dB)
  - Margin= Limit-Level


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 7.5. Test Summary

|               |            |                   |          |
|---------------|------------|-------------------|----------|
| Test Engineer | Carl Duan  | Temperature       | 23.4 °C  |
| Test Date     | 2026-06-26 | Air Pressure      | 985 Mbar |
| Worst Mode    | Mode 1     | Relative Humidity | 59.2 %   |
| Verdict       | Pass       |                   |          |

Test graph and data for LLAS radiated disturbance at loop X

Test Mode: Mode 1

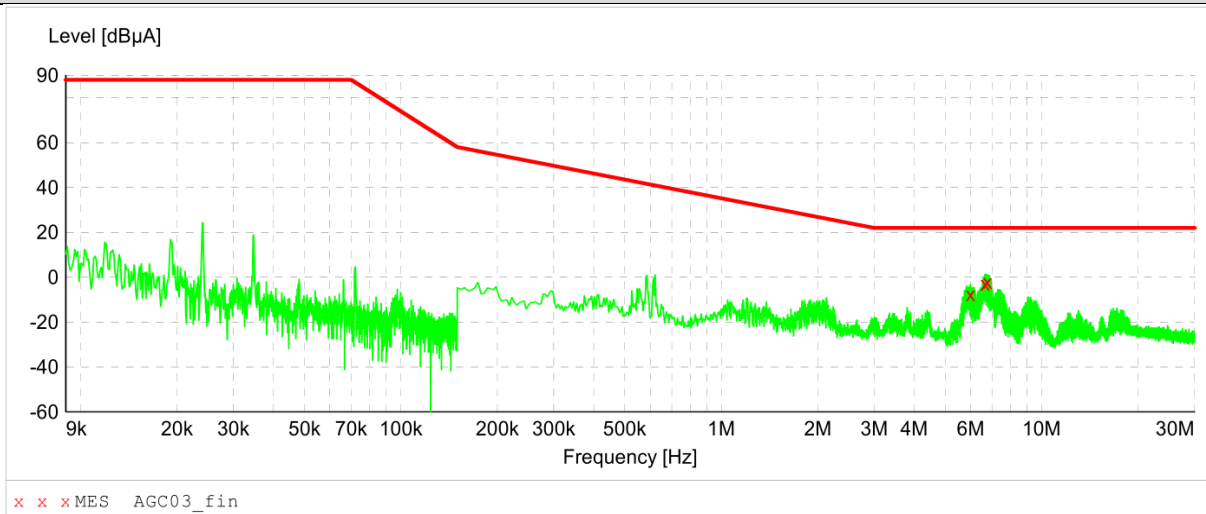


| Frequency [MHz] | Level [dBμV] | Factor [dB] | Limit [dBμV] | Margin [dB] | Detector | Line |
|-----------------|--------------|-------------|--------------|-------------|----------|------|
| 5.986000        | -7.6         | -24.9       | 22.0         | 29.6        | QP       | X    |
| 6.654000        | -2.9         | -24.9       | 22.0         | 24.9        | QP       | X    |
| 6.770000        | -2.1         | -24.9       | 22.0         | 24.1        | QP       | X    |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test graph and data for LLAS radiated disturbance at loop Y

Test Mode: Mode 1

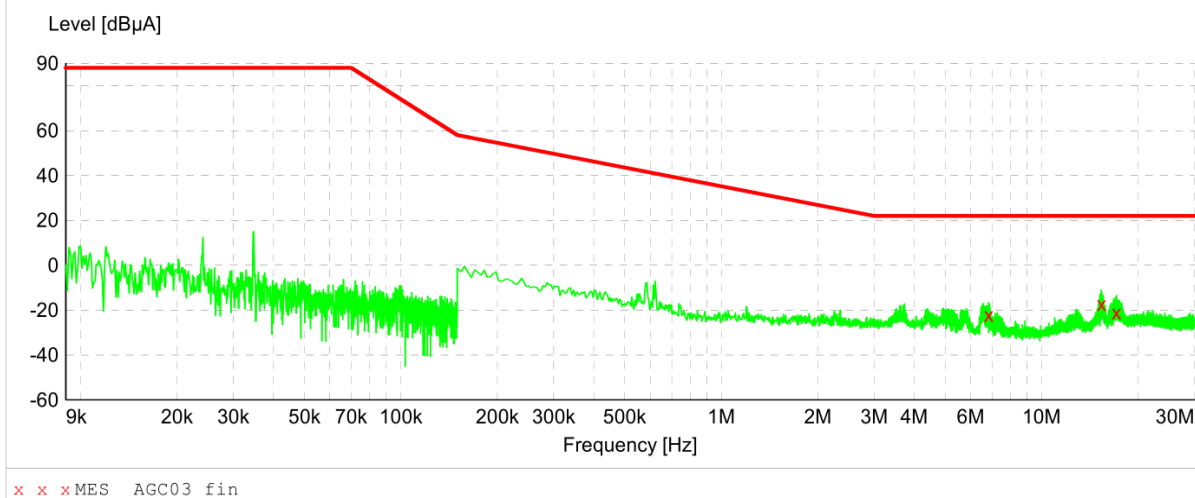


| Frequency [MHz] | Level [dBμV] | Factor [dB] | Limit [dBμV] | Margin [dB] | Detector | Line |
|-----------------|--------------|-------------|--------------|-------------|----------|------|
| 6.830000        | -22.2        | -24.9       | 22.0         | 44.2        | QP       | Y    |
| 15.362000       | -17.4        | -21.0       | 22.0         | 39.4        | QP       | Y    |
| 17.118000       | -21.1        | -20.1       | 22.0         | 43.1        | QP       | Y    |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

## Test graph and data for LLAS radiated disturbance at loop Z

Test Mode: Mode 1

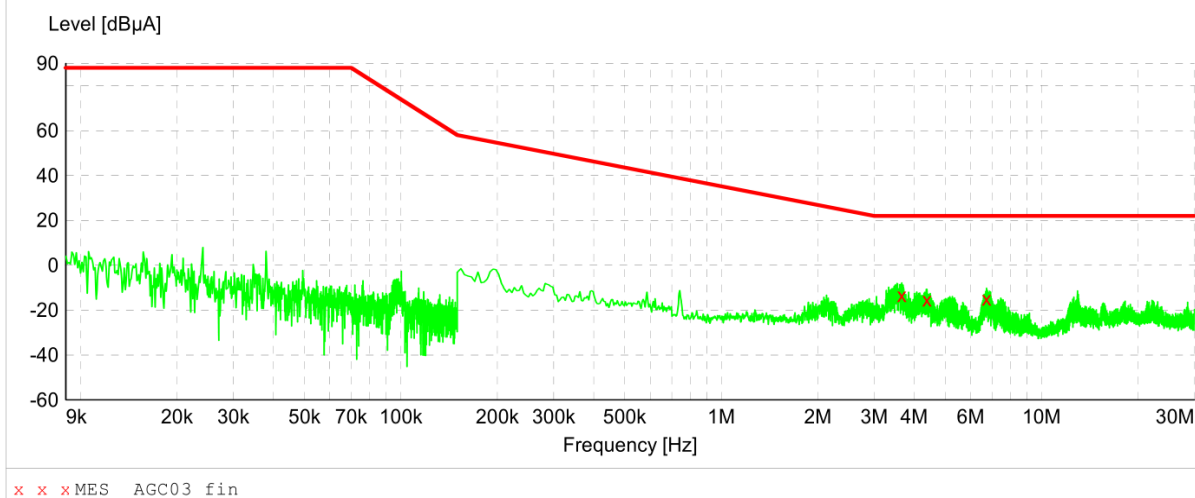

| Frequency [MHz] | Level [dBμV] | Factor [dB] | Limit [dBμV] | Margin [dB] | Detector | Line |
|-----------------|--------------|-------------|--------------|-------------|----------|------|
| 3.658000        | -13.4        | -25.0       | 22.0         | 35.4        | QP       | Z    |
| 4.382000        | -15.4        | -25.1       | 22.0         | 37.4        | QP       | Z    |
| 6.726000        | -14.9        | -24.9       | 22.0         | 36.9        | QP       | Z    |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

## 8. Measurement of Harmonic Current Emissions

### 8.1. Requirements


Applicable test standard(s): EN IEC 61000-3-2:2019+A1:2021+A2:2024

Limits of Harmonic Current Emissions

| Harmonic order<br><i>h</i>                                                                                                                                                                          | Limits                                   |                 |                                                                                                                      |                                                      |                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------|----------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|------------------------------------------|
|                                                                                                                                                                                                     | Class A                                  | Class B         | Class C <sup>a</sup>                                                                                                 | Class D                                              |                                          |
|                                                                                                                                                                                                     | Maximum permissible harmonic current (A) |                 | Maximum permissible harmonic current expressed as a percentage of the input current at the fundamental frequency (%) | Maximum permissible harmonic current per watt (mA/W) | Maximum permissible harmonic current (A) |
| 3                                                                                                                                                                                                   | 2.30                                     | 3.45            | 27 <sup>b</sup>                                                                                                      | 3.4                                                  | 2.30                                     |
| 5                                                                                                                                                                                                   | 1.14                                     | 1.71            | 10                                                                                                                   | 1.9                                                  | 1.14                                     |
| 7                                                                                                                                                                                                   | 0.77                                     | 1.155           | 7                                                                                                                    | 1.0                                                  | 0.77                                     |
| 9                                                                                                                                                                                                   | 0.40                                     | 0.6             | 5                                                                                                                    | 0.5                                                  | 0.40                                     |
| 11                                                                                                                                                                                                  | 0.33                                     | 0.495           | 3                                                                                                                    | 0.35                                                 | 0.33                                     |
| 13                                                                                                                                                                                                  | 0.21                                     | 0.315           | 3                                                                                                                    | 3.85/13                                              | 0.21                                     |
| 15≤ <i>h</i> ≤39(odd harmonics only)                                                                                                                                                                | 2.25/ <i>h</i>                           | 3.375/ <i>h</i> | 3                                                                                                                    | 3.85/ <i>h</i>                                       | 2.25/ <i>h</i>                           |
| 2                                                                                                                                                                                                   | 1.08                                     | 1.62            | 2                                                                                                                    | Not applicable                                       | Not applicable                           |
| 4                                                                                                                                                                                                   | 0.43                                     | 0.645           | Not applicable                                                                                                       |                                                      |                                          |
| 6                                                                                                                                                                                                   | 0.30                                     | 0.45            |                                                                                                                      |                                                      |                                          |
| 8≤ <i>h</i> ≤40(even harmonics only)                                                                                                                                                                | 1.84/ <i>h</i>                           | 2.76/ <i>h</i>  |                                                                                                                      |                                                      |                                          |
| Note:<br>(a) For some Class C products, other emission limits apply.<br>(b) The limit is determined based on the assumption of modern lighting technologies having power factors of 0.90 or higher. |                                          |                 |                                                                                                                      |                                                      |                                          |

The application of limits had been as defined in the applicable test standard.

## 8.2. Block Diagram of Test Setup

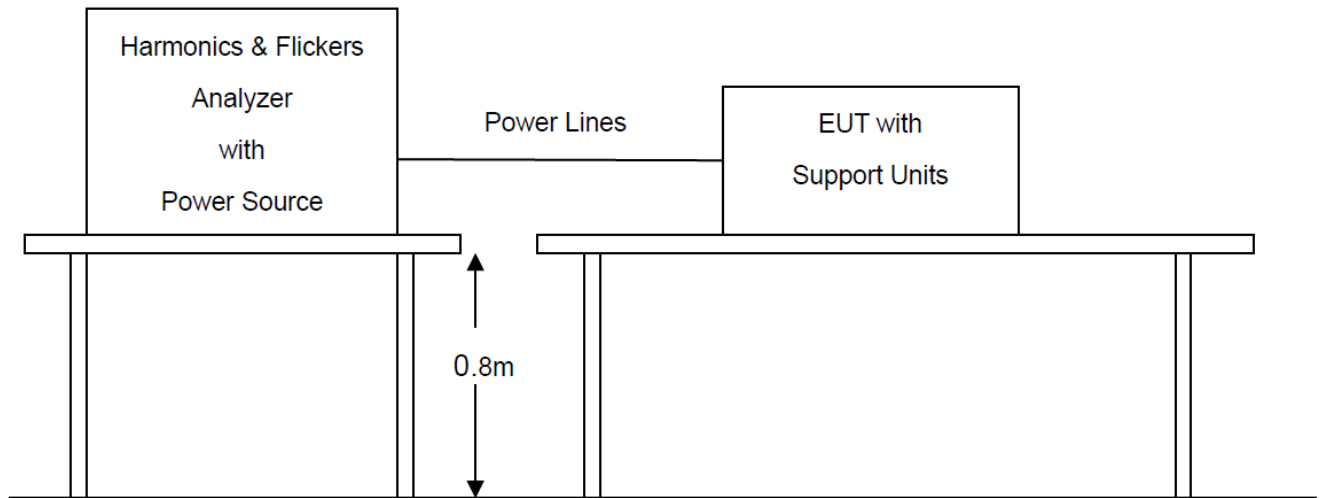

## 8.3. Equipment Details

### Measuring Instruments

| Instruments No. | Instruments              | Manufacturer | Model     | S/N   | Cal. Date  | Cal. Due   |
|-----------------|--------------------------|--------------|-----------|-------|------------|------------|
| AGC-EM-E033     | Signal Conditioning Unit | Schaffner    | CCN1000-1 | 72431 | 2026-05-19 | 2027-05-18 |
| AGC-EM-E015     | AC Source                | Schaffner    | NSG 1007  | 56825 | 2026-05-19 | 2027-05-18 |

### Measuring Software

| Software No. | Software Name | Manufacturer | Details                                                |
|--------------|---------------|--------------|--------------------------------------------------------|
| AGC-EM-S005  | CTS 4         | AMETEK       | For Harmonics And Flickers Measurement, Version 4.29.0 |

## 8.4. Configuration of the EUT and method of measurement

- The test shall be conducted according to the general requirements given in the applicable test standard. The test duration had been as defined in the applicable test standard.
- The measurement of harmonic currents shall be performed as follows:
  - for each harmonic order, measure the 1.5 s smoothed RMS harmonic current in each discrete Fourier transform (DFT) time window;
  - calculate the arithmetic average of the measured values from the DFT time windows, over the entire observation period.
- The value of the active input power to be used for the calculation of limits shall be determined as follows:
  - measure the 1.5 s smoothed active input power in each DFT time window;
  - determine the maximum of the measured values of active power from the DFT time windows over the entire duration of the test.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

- d. The harmonic currents and the active input power shall be measured under the same test conditions but need not be measured simultaneously.

#### **8.5. Test Summary**

Equipment with a rated power less than 5W is deemed to fulfil all relevant requirements of this standard without testing.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>

## 9. Measurement of Voltage Fluctuations and Flicker


### 9.1. Requirements

Applicable test standard(s): EN 61000-3-3:2013+A1:2019+A2:2021

Limits of Voltage Fluctuations and Flicker

| Parameters                                   | Definitions                                                                                                               | Limits                                                                                                                       |
|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| $T_{max}$                                    | the accumulated time value of $d(t)$ with a deviation exceeding 3.3 % during a single voltage change at the EUT terminals | $\leq 500$ ms                                                                                                                |
| $d_c$                                        | the maximum relative steady-state voltage change                                                                          | $\leq 3.3\%$                                                                                                                 |
| $d_{max}$                                    | the maximum relative voltage change                                                                                       | <input checked="" type="checkbox"/> $\leq 4\%$<br><input type="checkbox"/> $\leq 6\%$<br><input type="checkbox"/> $\leq 7\%$ |
| <input checked="" type="checkbox"/> $P_{st}$ | short-term flicker severity                                                                                               | $\leq 1.0$                                                                                                                   |
| <input type="checkbox"/> $P_{lt}$            | long-term flicker severity                                                                                                | $\leq 0.65$                                                                                                                  |

### 9.2. Block Diagram of Test Setup

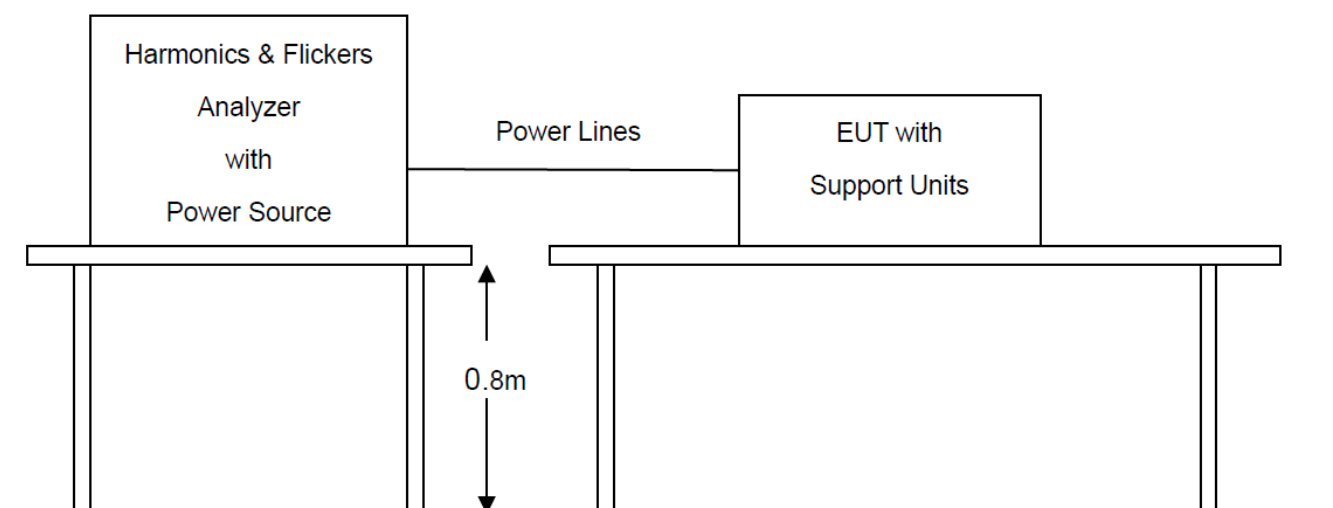

### 9.3. Equipment Details

Measuring Instruments

| Instruments No. | Instruments              | Manufacturer | Model     | S/N   | Cal. Date  | Cal. Due   |
|-----------------|--------------------------|--------------|-----------|-------|------------|------------|
| AGC-EM-E033     | Signal Conditioning Unit | Schaffner    | CCN1000-1 | 72431 | 2026-05-19 | 2027-05-18 |
| AGC-EM-E015     | AC Source                | Schaffner    | NSG 1007  | 56825 | 2026-05-19 | 2027-05-18 |

Measuring Software

| Software No. | Software Name | Manufacturer | Details                                                |
|--------------|---------------|--------------|--------------------------------------------------------|
| AGC-EM-S005  | CTS 4         | AMETEK       | For Harmonics And Flickers Measurement, Version 4.29.0 |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

#### 9.4. Configuration of the EUT and method of measurement

- a. The test shall be conducted according to the general requirements given in the applicable test standard.  
The test duration and test condition had been as defined in the applicable test standard.
- b. All types of voltage fluctuations would been assessed by direct measurement using a flicker meter which complies with the specification given in IEC 61000-4-15:2010.

#### 9.5. Test Summary

|               |            |                   |          |
|---------------|------------|-------------------|----------|
| Test Engineer | Carl Duan  | Temperature       | 22.6 °C  |
| Test Date     | 2026-06-26 | Air Pressure      | 985 Mbar |
| Worst Mode    | Mode 1     | Relative Humidity | 54.8 %   |
| Verdict       | Pass       |                   |          |

| Parameters | Measurement Value | Limits        |
|------------|-------------------|---------------|
| $T_{max}$  | 0                 | $\leq 500$ ms |
| $d_c$      | 0.00              | $\leq 3.3\%$  |
| $d_{max}$  | 0.00              | $\leq 4\%$    |
| $P_{st}$   | 0.308             | $\leq 1.0$    |


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 10. Measurement of Electrostatic discharge

### 10.1. Requirements

|                                              |                                                                                        |
|----------------------------------------------|----------------------------------------------------------------------------------------|
| Port                                         | Enclosure                                                                              |
| Basic Standard                               | IEC 61000-4-2                                                                          |
| Test Level                                   | ±8.0 kV (Air Discharge)<br>±4.0 kV (Contact Discharge)<br>±4.0 kV (Indirect Discharge) |
| Required Performance Criterion               | B                                                                                      |
| Time Between Each Discharge                  | 1 second                                                                               |
| Number of Discharge for Each Applied Voltage | 10                                                                                     |

### 10.2. Block Diagram of Test Setup

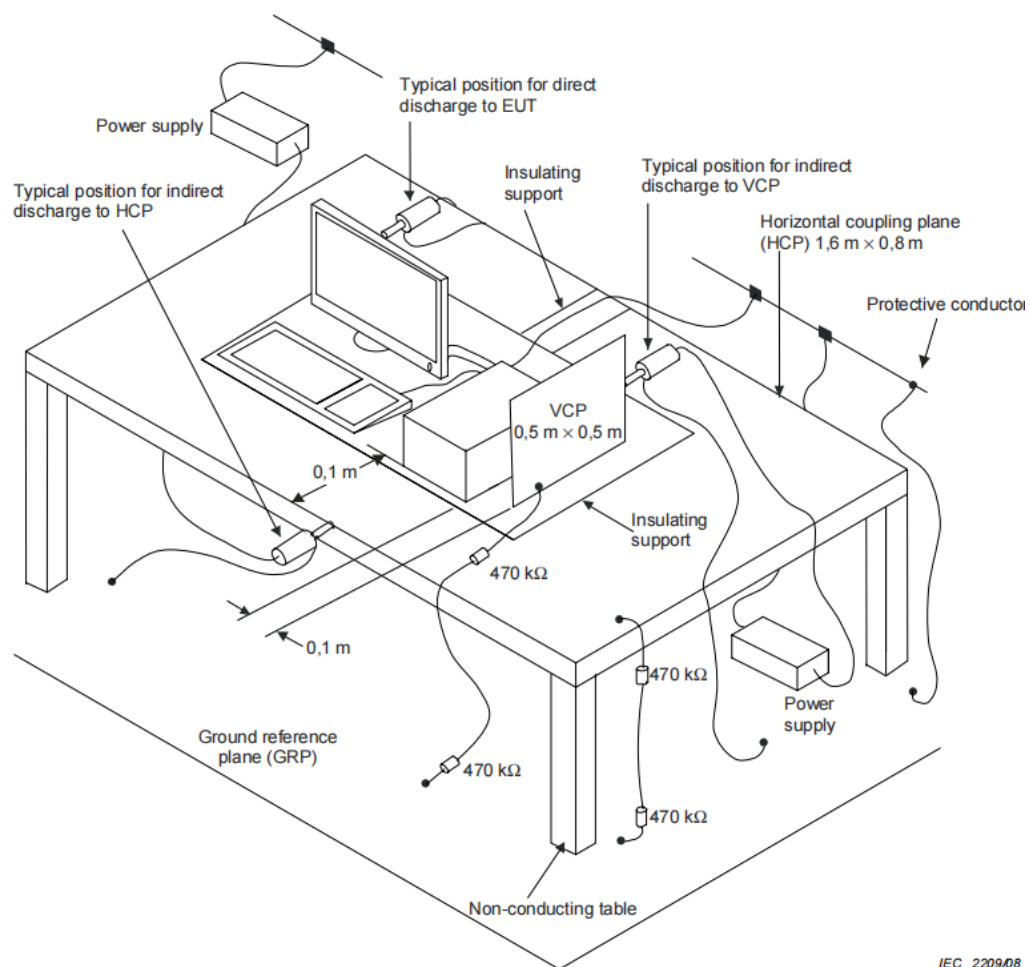

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

### 10.3. Equipment Details

#### Measuring Instruments

| Instruments No. | Instruments   | Manufacturer | Model   | S/N | Cal. Date  | Cal. Due   |
|-----------------|---------------|--------------|---------|-----|------------|------------|
| AGC-EM-E013     | ESD Simulator | Schaffner    | NSG 438 | 782 | 2025-11-03 | 2026-11-02 |

#### Measuring Software

| Software No. | Software Name | Manufacturer | Details |
|--------------|---------------|--------------|---------|
| --           | --            | --           | --      |

### 10.4. Configuration of the EUT and method of measurement


- Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- The time interval between two successive single discharges was at least 1 second.
- The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
- Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were completed.
- At least ten single discharges (in the most sensitive polarity) were applied to the Horizontal Coupling Plane at points on each side of the EUT. The ESD generator was positioned vertically at a distance of 0.1 meters from the EUT with the discharge electrode touching the HCP.
- At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the Vertical Coupling Plane in sufficiently different positions that the four faces of the EUT were completely illuminated. The VCP (dimensions 0.5m×0.5m) was placed vertically to and 0.1 meters from the EUT.
- The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

### 10.5. Test Summary

|               |            |                   |          |
|---------------|------------|-------------------|----------|
| Test Engineer | Sam Zheng  | Temperature       | 24.4 °C  |
| Test Date     | 2026-07-02 | Air Pressure      | 985 Mbar |
| Test Mode(s)  | Mode 1/2   | Relative Humidity | 53.8 %   |
| Verdict       | Pass       |                   |          |

| Voltage          | Coupling               | Observation                   | Performance |
|------------------|------------------------|-------------------------------|-------------|
| ±4kV             | Contact Discharge      | No degradation of performance | A           |
| ±2KV, ±4kV, ±8kV | Air Discharge          | No degradation of performance | A           |
| ±4kV             | Indirect Discharge HCP | No degradation of performance | A           |
| ±4kV             | Indirect Discharge VCP | No degradation of performance | A           |

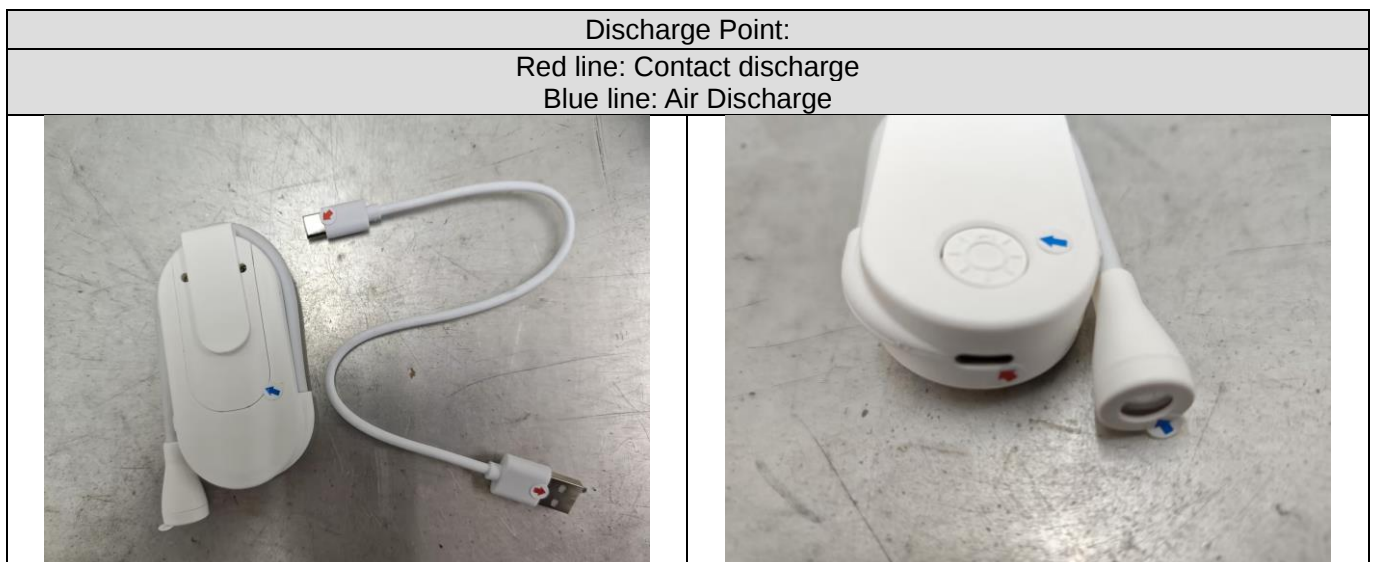

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 11. Measurement of Radio-Frequency Electromagnetic Field

### 11.1. Requirements


|                                  |                                                    |
|----------------------------------|----------------------------------------------------|
| Port                             | Enclosure                                          |
| Basic Standard                   | IEC 61000-4-3                                      |
| Required Performance Criterion   | A                                                  |
| Test Level                       | 3V/m with 80% AM. 1kHz Modulation at 80 to 1000MHz |
| Antenna polarization             | Vertical and Horizontal                            |
| Step size increment <sup>a</sup> | 1%                                                 |
| Dwell time <sup>b</sup>          | ≤5 seconds                                         |
| Test Distance                    | 3m                                                 |
| EUT position facing antenna      | Front side, back side, left side and right side    |

Notes:

- Recognizing that a 1% step size is preferred, the frequency range can be swept incrementally with a step size not exceeding 4% of the previous frequency with a test level of twice the value of the specified test level in order to reduce the testing time for equipment requiring testing in multiple configurations and/or long cycle times.
- The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised and to be able to respond. However, the dwell time shall not exceed 5 seconds at each of the frequencies during the scan. The time to exercise the EUT is not interpreted as a total time of a program or a cycle but related to the reaction time in case of failure of the EUT.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 11.2. Block Diagram of Test Setup

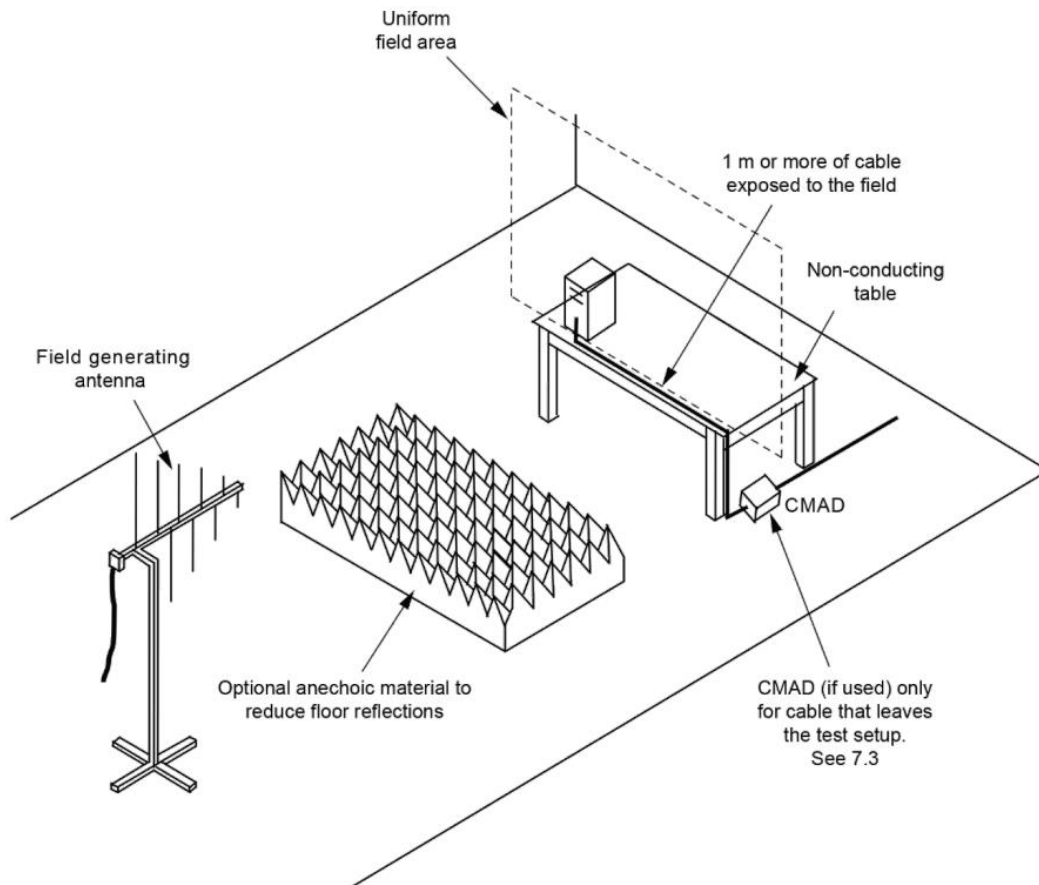

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

### 11.3. Equipment Details

Measuring Instruments

| Instruments No. | Instruments        | Manufacturer | Model    | S/N             | Cal. Date  | Cal. Due   |
|-----------------|--------------------|--------------|----------|-----------------|------------|------------|
| AGC-EM-E115     | Signal Generator   | Aglient      | N5182A   | MY49060745      | 2026-01-13 | 2027-01-12 |
| AGC-EM-E040     | Directional Couple | Werlatonee   | C5571-10 | 99463           | 2026-01-13 | 2028-01-12 |
| AGC-EM-E035     | Power Probe        | R&S          | URV5-Z4  | 100124          | 2025-03-24 | 2027-03-23 |
| AGC-EM-E005     | Power Meter        | R&S          | NRVD     | 8323781027      | 2025-03-24 | 2027-03-23 |
| AGC-EM-E016     | Power Amplifier    | KALMUS       | 7100LC   | 04-02/17-06-001 | 2025-07-18 | 2026-07-17 |
| AGC-EM-E028     | Wideband Antenna   | ETS-LINDGREN | 3142C    | 00060447        | N/A        | N/A        |

Measuring Software

| Software No. | Software Name | Manufacturer | Details                              |
|--------------|---------------|--------------|--------------------------------------|
| AGC-EM-S006  | TS+[JS35-RS]  | Tonscend     | For EMC Measurement, Version 2.0.1.8 |

### 11.4. Configuration of the EUT and method of measurement

- The Equipment Under Test (EUT) was positioned within the Uniform Field Area (UFA) on a supporting table, ensuring a 3-meter separation from the transmitting antenna. This setup aligns with the calibrated square area, guaranteeing field uniformity during testing. The supporting units were strategically located outside the UFA to avoid any potential interference. Nonetheless, the cables connected to the EUT were intentionally exposed to the precisely calibrated field within the UFA.
- Before testing, it will verify the proper operation of the test equipment/system. This verification will involve measuring the field strength at one point within the Uniform Field Area (UFA) at various frequencies.
- The test shall be performed according to the above requirements and block diagram which shall specify the test setup.
- The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

### 11.5. Test Summary

|               |            |                   |          |
|---------------|------------|-------------------|----------|
| Test Engineer | Alex Yang  | Temperature       | 22.1 °C  |
| Test Date     | 2026-07-01 | Air Pressure      | 985 Mbar |
| Test Mode(s)  | Mode 1/2   | Relative Humidity | 52.3 %   |
| Verdict       | Pass       |                   |          |

| Frequency     | Exposed Side | Field Strength (V/m) | Observation                   | Performance |
|---------------|--------------|----------------------|-------------------------------|-------------|
| 80MHz to 1GHz | Front        | 3V/m (rms)           | No degradation of performance | A           |
|               | Left         |                      | No degradation of performance | A           |
|               | Rear         |                      | No degradation of performance | A           |
|               | Right        |                      | No degradation of performance | A           |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 12. Measurement of Radio-frequency common mode


### 12.1. Requirements

|                                  |                                                          |                                                                               |                                                      |
|----------------------------------|----------------------------------------------------------|-------------------------------------------------------------------------------|------------------------------------------------------|
| Port                             | <input checked="" type="checkbox"/> AC mains power ports | <input type="checkbox"/> signal, wired network and control ports <sup>a</sup> | <input type="checkbox"/> DC power ports <sup>a</sup> |
| Basic Standard                   | IEC 61000-4-6                                            |                                                                               |                                                      |
| Required Performance Criterion   | A                                                        |                                                                               |                                                      |
| Test Level                       | 0.15 to 80 MHz, 3 V RMS (unmodulated), 80 % AM (1 kHz)   |                                                                               |                                                      |
| Step size increment <sup>b</sup> | 1%                                                       |                                                                               |                                                      |
| Dwell time <sup>c</sup>          | ≤5 seconds                                               |                                                                               |                                                      |

Notes:

- Applicable only to ports which, according to the manufacturer's specification, supports cable lengths greater than 3 m.
- Recognizing that a 1% step size is preferred, the frequency range can be swept incrementally with a step size not exceeding 4% of the previous frequency with a test level of twice the value of the specified test level in order to reduce the testing time for equipment requiring testing in multiple configurations and/or long cycle times.
- The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised and to be able to respond. However, the dwell time shall not exceed 5 seconds at each of the frequencies during the scan. The time to exercise the EUT is not interpreted as a total time of a program or a cycle but related to the reaction time in case of failure of the EUT.

### 12.2. Block Diagram of Test Setup

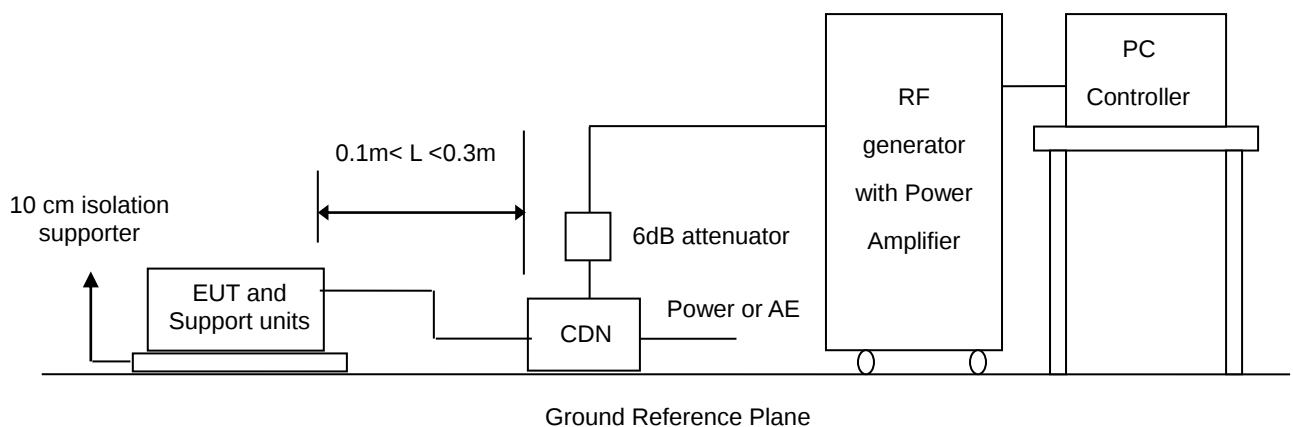

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

### 12.3. Equipment Details

#### Measuring Instruments

| Instruments No. | Instruments                        | Manufacturer | Model       | S/N            | Cal. Date  | Cal. Due   |
|-----------------|------------------------------------|--------------|-------------|----------------|------------|------------|
| AGC-EM-E017     | Power Amplifier                    | AR           | 75A250      | 18464          | 2025-07-18 | 2026-07-17 |
| AGC-EM-E161     | CDN                                | 3C TEST      | CDN<br>M2M3 | ES064002624028 | 2025-09-05 | 2026-09-04 |
| AGC-EM-A048     | Attenuator                         | ZHINAN       | E-002       | N/A            | 2024-07-24 | 2026-07-23 |
| AGC-EM-E035     | Power Probe                        | R&S          | URV5-Z4     | 100124         | 2025-03-24 | 2027-03-23 |
| AGC-EM-E005     | Power Meter                        | R&S          | NRVD        | 8323781027     | 2025-03-24 | 2027-03-23 |
| AGC-EM-E040     | Directional Coupler                | Werlatone    | C5571-10    | 99463          | 2026-01-13 | 2028-01-12 |
| AGC-EM-E034     | Electromagnetic<br>Injection Clamp | Luthi        | EM 101      | 35773          | 2024-07-24 | 2026-07-23 |
| AGC-EM-E115     | Signal Generator                   | Aglient      | N5182A      | MY49060745     | 2026-01-13 | 2027-01-12 |

#### Measuring Software

| Software No. | Software Name | Manufacturer | Details                              |
|--------------|---------------|--------------|--------------------------------------|
| AGC-EM-S007  | TS+[JS35-CS]  | Tonscend     | For EMC Measurement, Version 2.0.1.7 |

### 12.4. Configuration of the EUT and method of measurement

- The Equipment Under Test (EUT) shall be tested within its intended operating and climatic conditions.
- The test generator and the coupling/decoupling network shall be placed directly on, and bonded to, the ground reference plane. The test shall be performed with the test generator connected to each of the coupling devices (CDN, EM clamp, current clamp) in turn. All other cables not under test shall either be disconnected (when functionally allowed) or provided with decoupling networks or unterminated CDNs only.
- The test shall be performed according to the above requirements and block diagram which shall specify the test setup.
- The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 12.5. Test Summary

|               |            |                   |          |
|---------------|------------|-------------------|----------|
| Test Engineer | Sam Zheng  | Temperature       | 24.4 °C  |
| Test Date     | 2026-07-02 | Air Pressure      | 985 Mbar |
| Test Mode(s)  | Mode 1     | Relative Humidity | 53.8 %   |
| Verdict       | Pass       |                   |          |

| Test port      | Test Level | Coupling method | Observation                   | Performance |
|----------------|------------|-----------------|-------------------------------|-------------|
| AC Mains Input | 3 V        | CDN             | No degradation of performance | A           |


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

### 13. Measurement of Fast Transients

#### 13.1. Requirements

|                                                                                                                            |                                                          |                                                                               |                                                      |
|----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|-------------------------------------------------------------------------------|------------------------------------------------------|
| Port                                                                                                                       | <input checked="" type="checkbox"/> AC mains power ports | <input type="checkbox"/> signal, wired network and control ports <sup>a</sup> | <input type="checkbox"/> DC power ports <sup>a</sup> |
| Basic Standard                                                                                                             | IEC 61000-4-4                                            |                                                                               |                                                      |
| Required Performance Criterion                                                                                             | B                                                        |                                                                               |                                                      |
| Test Level                                                                                                                 | 1 kV (peak)                                              | 0.5 kV (peak)                                                                 | 0.5 kV (peak)                                        |
| Polarity                                                                                                                   | Positive/Negative                                        |                                                                               |                                                      |
| Impulse Frequency                                                                                                          | 5kHz                                                     |                                                                               |                                                      |
| Impulse wave shape                                                                                                         | 5/50ns                                                   |                                                                               |                                                      |
| Burst Duration                                                                                                             | 15ms                                                     |                                                                               |                                                      |
| Burst Period                                                                                                               | 300ms                                                    |                                                                               |                                                      |
| Notes:                                                                                                                     |                                                          |                                                                               |                                                      |
| a. Applicable only to ports which, according to the manufacturer's specification, supports cable lengths greater than 3 m. |                                                          |                                                                               |                                                      |

#### 13.2. Block Diagram of Test Setup

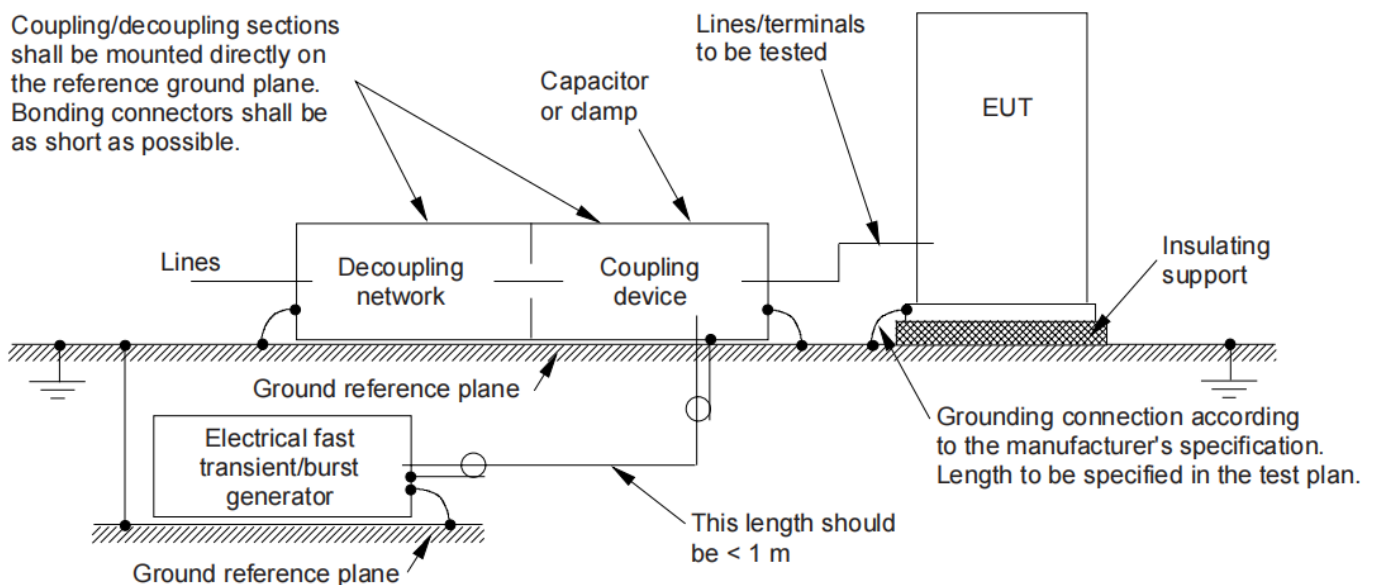

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

### 13.3. Equipment Details

#### Measuring Instruments

| Instruments No. | Instruments              | Manufacturer | Model       | S/N   | Cal. Date  | Cal. Due   |
|-----------------|--------------------------|--------------|-------------|-------|------------|------------|
| AGC-EM-E008     | EFT/Surge/DIPS Generator | Schaffner    | Modula 6150 | 34437 | 2026-05-19 | 2027-05-18 |

#### Measuring Software

| Software No. | Software Name | Manufacturer | Details                                        |
|--------------|---------------|--------------|------------------------------------------------|
| AGC-EM-S009  | WinModula     | Schaffner    | For EFT/Surge/Dips Measurement, Version 2.31 c |

### 13.4. Configuration of the EUT and method of measurement

- The Equipment Under Test (EUT), whether stationary floor-mounted or table top, and equipment designed to be mounted in other configurations, shall be placed on a ground reference plane and shall be insulated from it by an insulating support 0,1 m  $\pm$  0,01 m thick.
- The test generator and the coupling/decoupling network shall be placed directly on, and bonded to, the ground reference plane.
- The EUT shall be arranged and connected to satisfy its functional requirements, according to the equipment installation specifications. The minimum distance between the EUT and all other conductive structures (e.g. the walls of a shielded room), except the ground reference plane shall be more than 0,5 m. All cables to the EUT shall be placed on the insulation support 0,1 m above the ground reference plane. Cables not subject to electrical fast transients shall be routed as far as possible from the cable under test to minimize the coupling between the cables.
- The test voltages shall be coupled to all of the EUT ports including those between two units of equipment involved in the test, unless the length of the interconnecting cable makes it impossible to test.
- Either a direct coupling network or a capacitive clamp shall be used for the application of the test voltages.
- The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

**13.5. Test Summary**

|               |            |                   |          |
|---------------|------------|-------------------|----------|
| Test Engineer | Sam Zheng  | Temperature       | 24.4 °C  |
| Test Date     | 2026-07-02 | Air Pressure      | 985 Mbar |
| Test Mode(s)  | Mode 1     | Relative Humidity | 53.8 %   |
| Verdict       | Pass       |                   |          |

| Inject Line | Voltage(kV) | Inject Method | Observation                   | Performance |
|-------------|-------------|---------------|-------------------------------|-------------|
| AC Lines    | 0.5, 1      | Direct        | No degradation of performance | A           |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


## 14. Measurement of Surges

### 14.1. Requirements

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                          |                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|------------------------------------------|
| Port                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | AC mains power ports <sup>a</sup>                        |                                          |
| Basic Standard                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | IEC 61000-4-5                                            |                                          |
| Required Performance Criterion                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | B                                                        |                                          |
| Test Level                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Self-ballasted lamps ≤ 25 W:                             | Line to line: 0.5 kV                     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Lighting equipment (except self-ballasted lamps ≤ 25 W): | Line to line: 1 kV; Line to ground: 2 kV |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Road and street lighting equipment:                      | Line to line: 2 kV; Line to ground: 4 kV |
| Tr/Th                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 1.2/50 (8/20) μs                                         |                                          |
| Number of impulses                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Five positive and five negative impulses                 |                                          |
| Time between successive impulses                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1 min                                                    |                                          |
| Notes:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                          |                                          |
| a. The number of pulses applied shall be as follows: <ul style="list-style-type: none"><li>Five positive pulses line-to-neutral at 90° phase.</li><li>Five negative pulses line-to-neutral at 270° phase.</li></ul> The following additional pulses are required only if the EUT has an earth connection or if the EUT is earthed via any AE: <ul style="list-style-type: none"><li>Five positive pulses line-to-earth at 90° phase.</li><li>Five negative pulses line-to-earth at 270° phase.</li><li>Five negative pulses neutral-to-earth at 90° phase.</li><li>Five positive pulses neutral-to-earth at 270° phase.</li></ul> |                                                          |                                          |
| b. Applicable only to ports which, according to the manufacturer's specification, supports cable lengths greater than 3 m.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                          |                                          |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

#### 14.2. Block Diagram of Test Setup

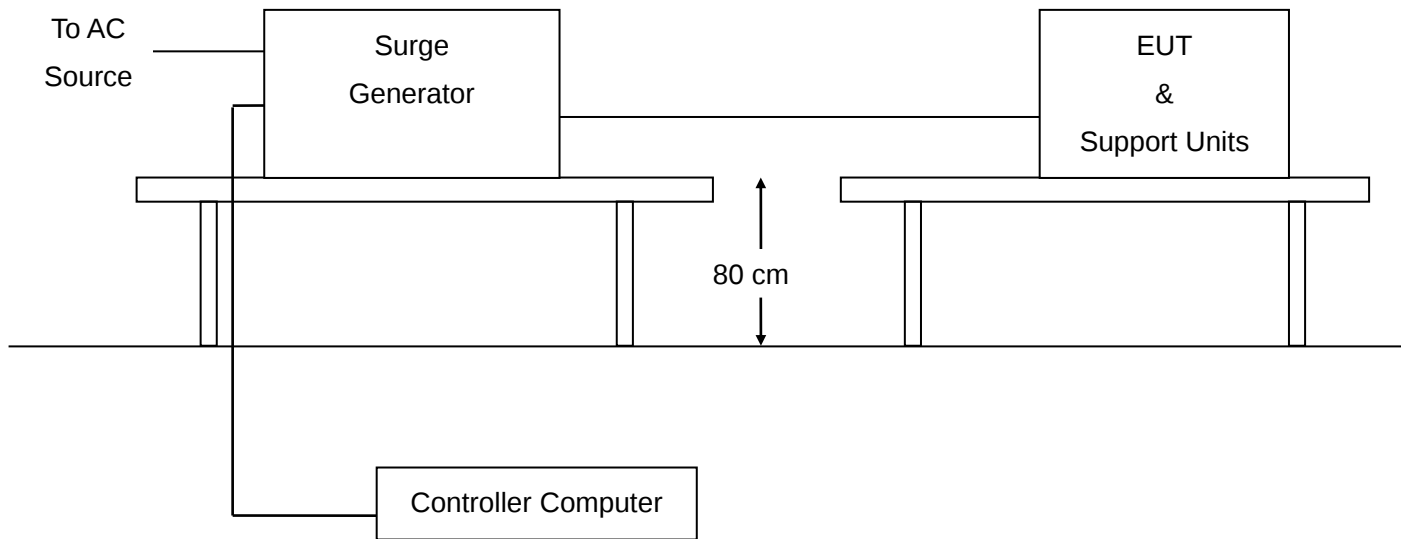

#### 14.3. Equipment Details

##### Measuring Instruments

| Instruments No. | Instruments              | Manufacturer | Model       | S/N   | Cal. Date  | Cal. Due   |
|-----------------|--------------------------|--------------|-------------|-------|------------|------------|
| AGC-EM-E008     | EFT/Surge/DIPS Generator | Schaffner    | Modula 6150 | 34437 | 2026-05-19 | 2027-05-18 |

##### Measuring Software

| Software No. | Software Name | Manufacturer | Details                                        |
|--------------|---------------|--------------|------------------------------------------------|
| AGC-EM-S009  | WinModula     | Schaffner    | For EFT/Surge/Dips Measurement, Version 2.31 c |

#### 14.4. Configuration of the EUT and method of measurement

- Verification shall be performed. It is preferable to perform the verification prior to the test.
- The test shall be performed according to the above requirements and block diagram which shall specify the test setup.
- When testing line-to-ground, the lines are tested individually in sequence, if there is no other specification.
- The test procedure shall also consider the non-linear current-voltage characteristics of the equipment under test. Therefore, all lower test levels including the selected test level shall be tested.
- The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

#### 14.5. Test Summary

|               |            |                   |          |
|---------------|------------|-------------------|----------|
| Test Engineer | Sam Zheng  | Temperature       | 24.4 °C  |
| Test Date     | 2026-07-02 | Air Pressure      | 985 Mbar |
| Test Mode(s)  | Mode 1     | Relative Humidity | 53.8 %   |
| Verdict       | Pass       |                   |          |

| Test port      | Coupling        | Voltage(kV) | Observation                   | Performance |
|----------------|-----------------|-------------|-------------------------------|-------------|
| AC Mains Input | line-to-neutral | 0.5, 1      | No degradation of performance | A           |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 15. Measurement of Voltage dips and interruptions


### 15.1. Requirements

|                                |                                                                                       |      |
|--------------------------------|---------------------------------------------------------------------------------------|------|
| Port                           | AC mains power ports                                                                  |      |
| Basic Standard                 | IEC 61000-4-11                                                                        |      |
| Required Performance Criterion | B                                                                                     | B    |
| Residual voltage <sup>a</sup>  | 0 %                                                                                   | 70 % |
| Number of cycles <sup>b</sup>  | 0.5                                                                                   | 10   |
| Variation/dip repetition       | Sequence of three dips/interruptions with an interval of 10 seconds between each test |      |

Notes:

- Changes to occur at 0 degree crossover point of the voltage waveform. If the EUT does not demonstrate compliance when tested with 0 degree switching, the test shall be repeated with the switching occurring at both 90 degrees and 270 degrees. If the EUT satisfies these alternative requirements, then it fulfils the requirements.
- Apply at only one supply frequency of the EUT.

### 15.2. Block Diagram of Test Setup

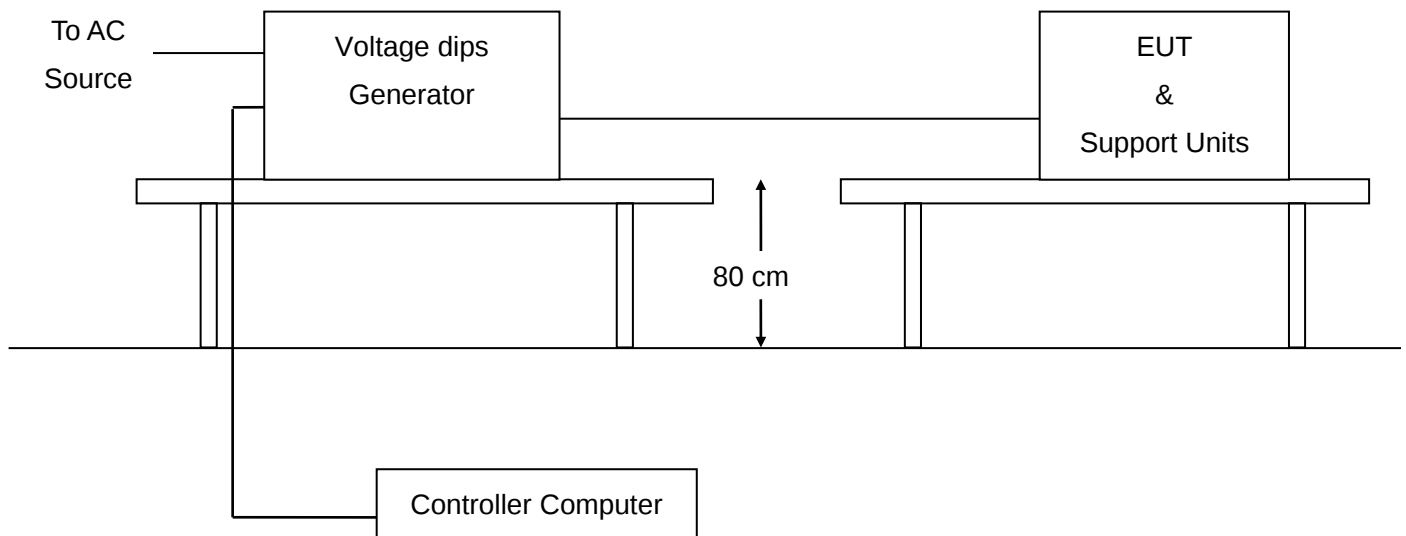

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

### 15.3. Equipment Details

#### Measuring Instruments

| Instruments No. | Instruments              | Manufacturer | Model       | S/N   | Cal. Date  | Cal. Due   |
|-----------------|--------------------------|--------------|-------------|-------|------------|------------|
| AGC-EM-E008     | EFT/Surge/DIPS Generator | Schaffner    | Modula 6150 | 34437 | 2026-05-19 | 2027-05-18 |

#### Measuring Software

| Software No. | Software Name | Manufacturer | Details                                        |
|--------------|---------------|--------------|------------------------------------------------|
| AGC-EM-S009  | WinModula     | Schaffner    | For EFT/Surge/Dips Measurement, Version 2.31 c |

### 15.4. Configuration of the EUT and method of measurement

- The test shall be performed according to the above requirements and block diagram which shall specify the test setup.
- The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.

### 15.5. Test Summary

|               |            |                   |          |
|---------------|------------|-------------------|----------|
| Test Engineer | Sam Zheng  | Temperature       | 24.4 °C  |
| Test Date     | 2026-07-02 | Air Pressure      | 985 Mbar |
| Test Mode(s)  | Mode 1     | Relative Humidity | 53.8 %   |
| Verdict       | Pass       |                   |          |

| Test port      | Residual voltage (%) | Cycles | Observation                   | Performance |
|----------------|----------------------|--------|-------------------------------|-------------|
| AC Mains Input | 0                    | 0.5    | No degradation of performance | A           |
|                | 70                   | 10     | No degradation of performance | A           |


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 16. Measurement of Power Frequency Magnetic Field

### 16.1. Requirements

|                                   |               |
|-----------------------------------|---------------|
| Port                              | Enclosure     |
| Basic Standard                    | IEC 61000-4-8 |
| Test Level                        | 3 A/m         |
| Frequency                         | 50 or 60 Hz   |
| Required Performance Criterion    | A             |
| Application of the magnetic field | Continuous    |

### 16.2. Block Diagram of Test Setup

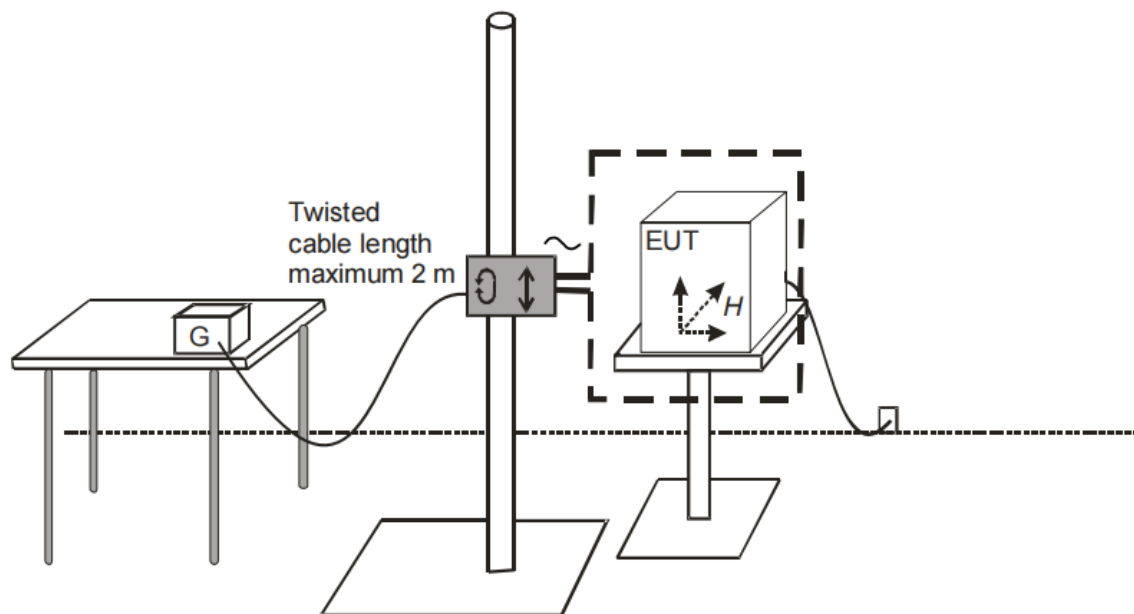

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

### 16.3. Equipment Details

#### Measuring Instruments

| Instruments No. | Instruments                                                        | Manufacturer | Model | S/N    | Cal. Date  | Cal. Due   |
|-----------------|--------------------------------------------------------------------|--------------|-------|--------|------------|------------|
| AGC-EM-E071     | Power<br>Frequency<br>Magnetic Field<br>Immunity Testing<br>Device | HTEC         | HPFMF | 161701 | 2026-03-12 | 2027-03-11 |
| AGC-EM-E073     | Coil of Power<br>Frequency<br>Magnetic Field                       | HTEC         | HPFMF | N/A    | 2026-03-12 | 2027-03-11 |

#### Measuring Software

| Software No. | Software Name | Manufacturer | Details |
|--------------|---------------|--------------|---------|
| --           | --            | --           | --      |

### 16.4. Configuration of the EUT and method of measurement

- The test shall be performed according to the above requirements and block diagram which shall specify the test setup.
- The power supply, signal and other functional electrical quantities shall be applied within their rated range.
- If the actual operating signals are not available, they may be simulated.
- Preliminary verification of equipment performances shall be carried out prior to applying the test magnetic field.
- The plane of the inductive coil shall then be rotated by 90° in order to expose the EUT to the test field with different orientations and the same procedure.
- The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

**16.5. Test Summary**

|               |            |                   |          |
|---------------|------------|-------------------|----------|
| Test Engineer | Sam Zheng  | Temperature       | 24.4 °C  |
| Test Date     | 2026-07-02 | Air Pressure      | 985 Mbar |
| Test Mode(s)  | Mode 1/2   | Relative Humidity | 53.8 %   |
| Verdict       | Pass       |                   |          |

| Frequency | Test Level | Observation                   | Performance |
|-----------|------------|-------------------------------|-------------|
| 50Hz      | 3A/m       | No degradation of performance | A           |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 17. Photographs of Test Setup




Conducted emissions from the AC mains power ports



Magnetic field induced current

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

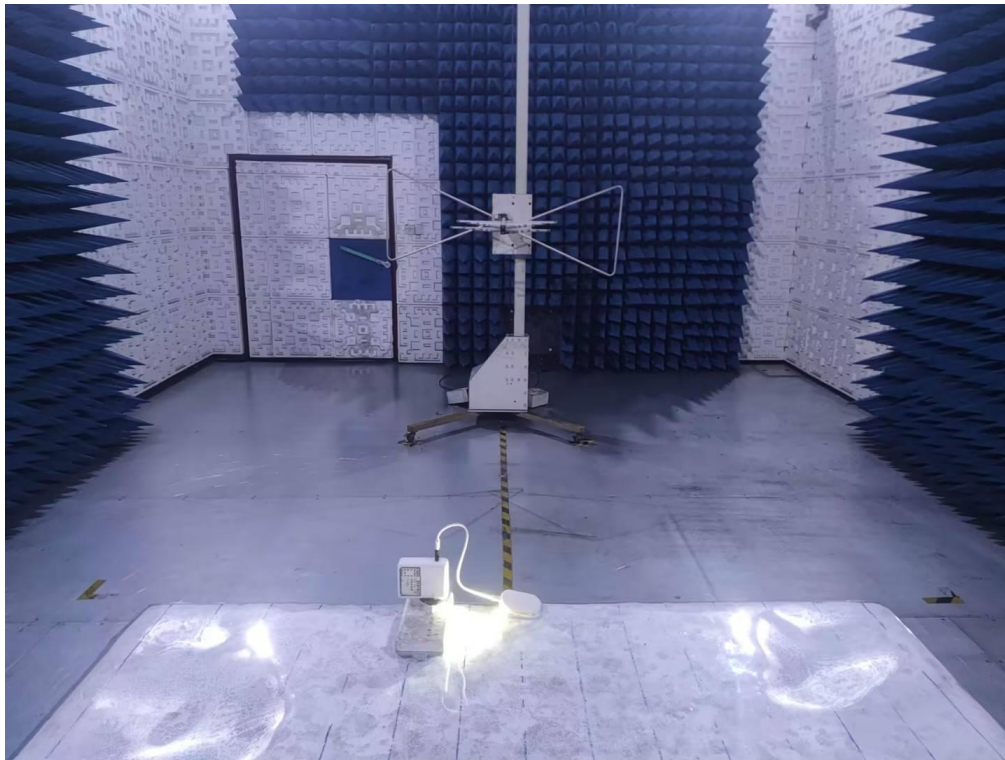

Radiated emissions at frequencies up to 1 GHz




Harmonic current emissions & Voltage fluctuations and flicker

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>




Electrostatic discharge

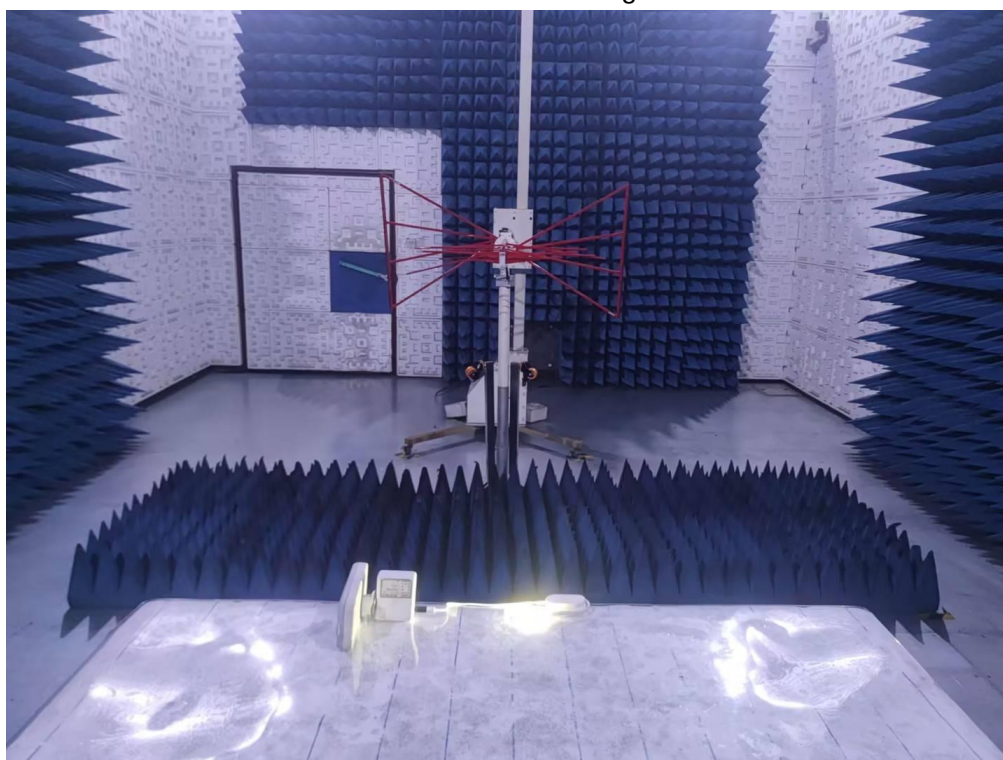

Radio-frequency electromagnetic field up to 1 GHz

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

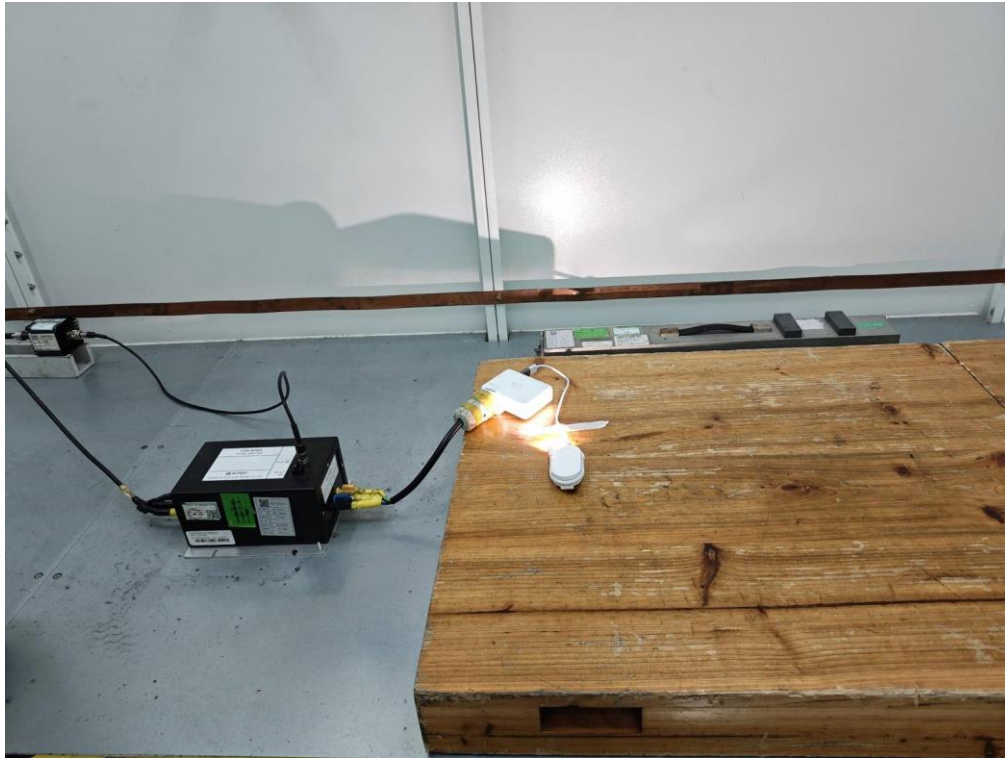

Radio-frequency common mode at the AC mains power ports



Fast transients/Surges/ Voltage dips at the AC mains power ports

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>



Power-frequency magnetic field

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>

## 18. Photographs of EUT



All view-1 of EUT



All view-2 of EUT

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).



Top view of EUT



Bottom view of EUT

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).


Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>




Front view of EUT

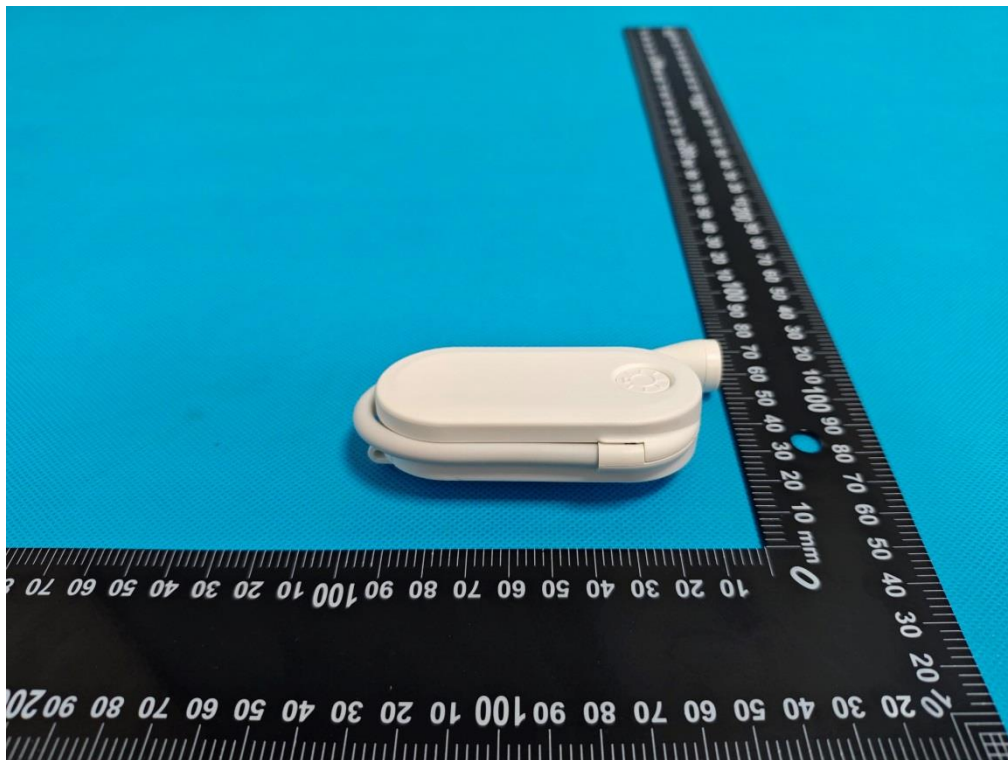


Back view of EUT

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>

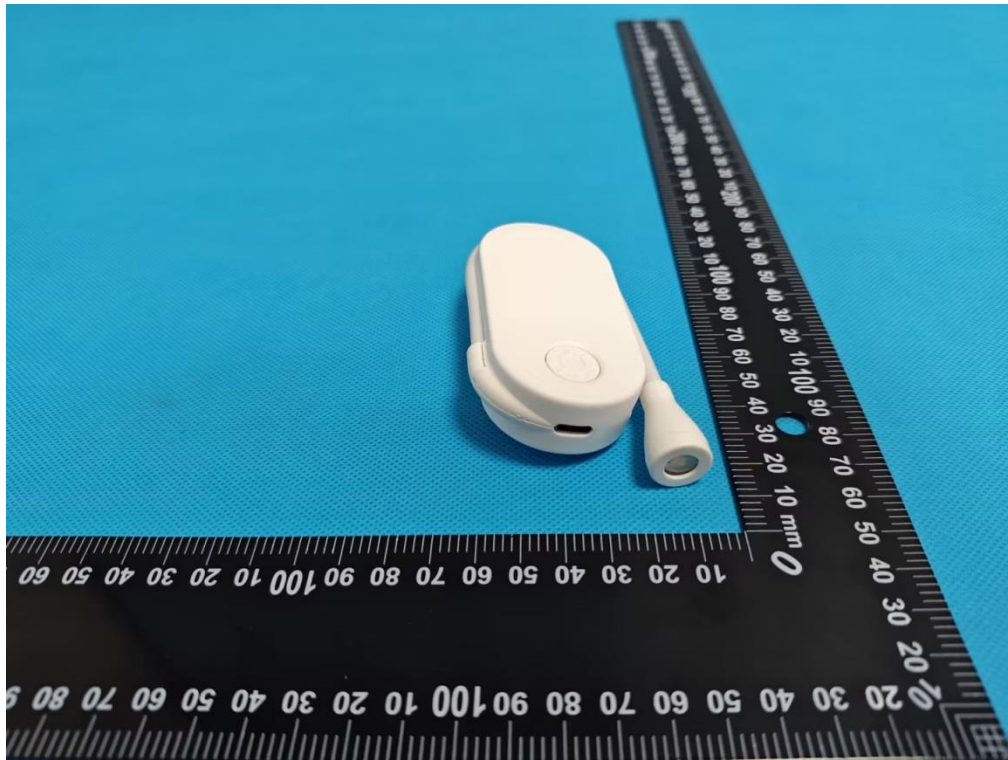


Left view of EUT

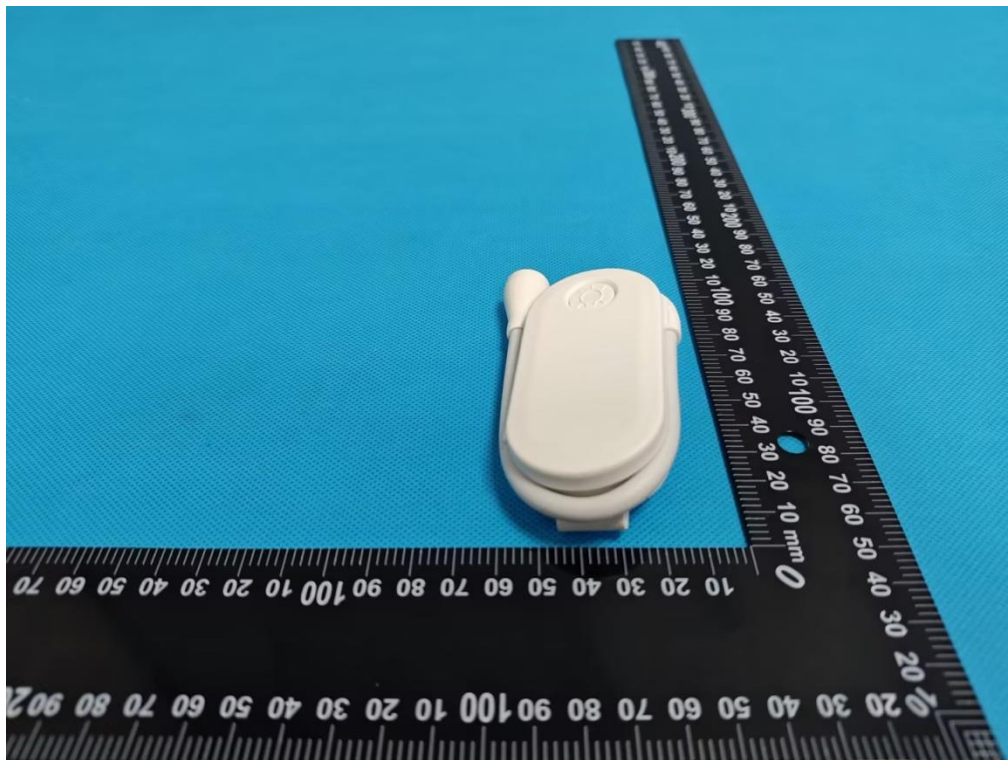


Right view of EUT

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>

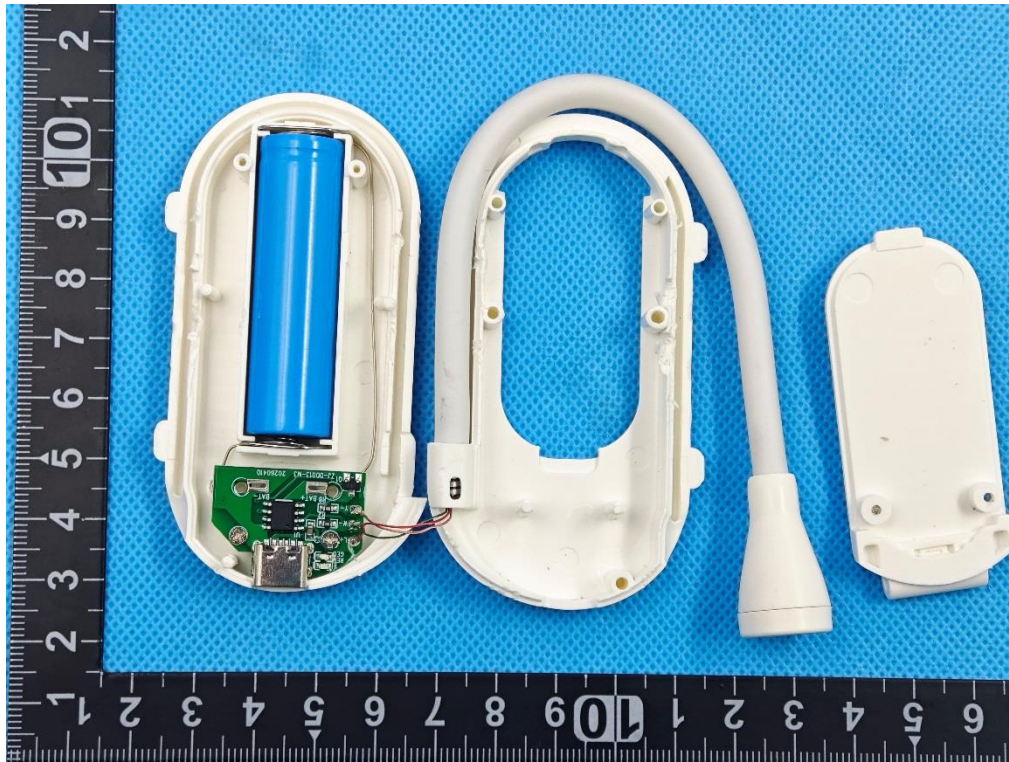


Open view-1 of EUT

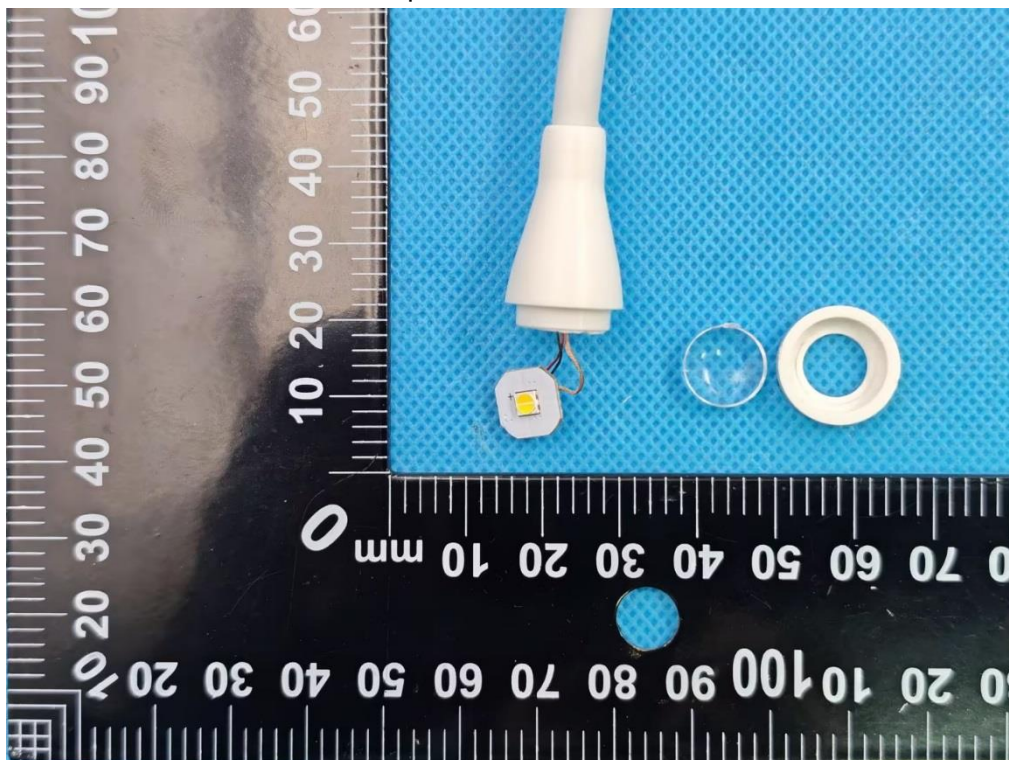


Open view-2 of EUT

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

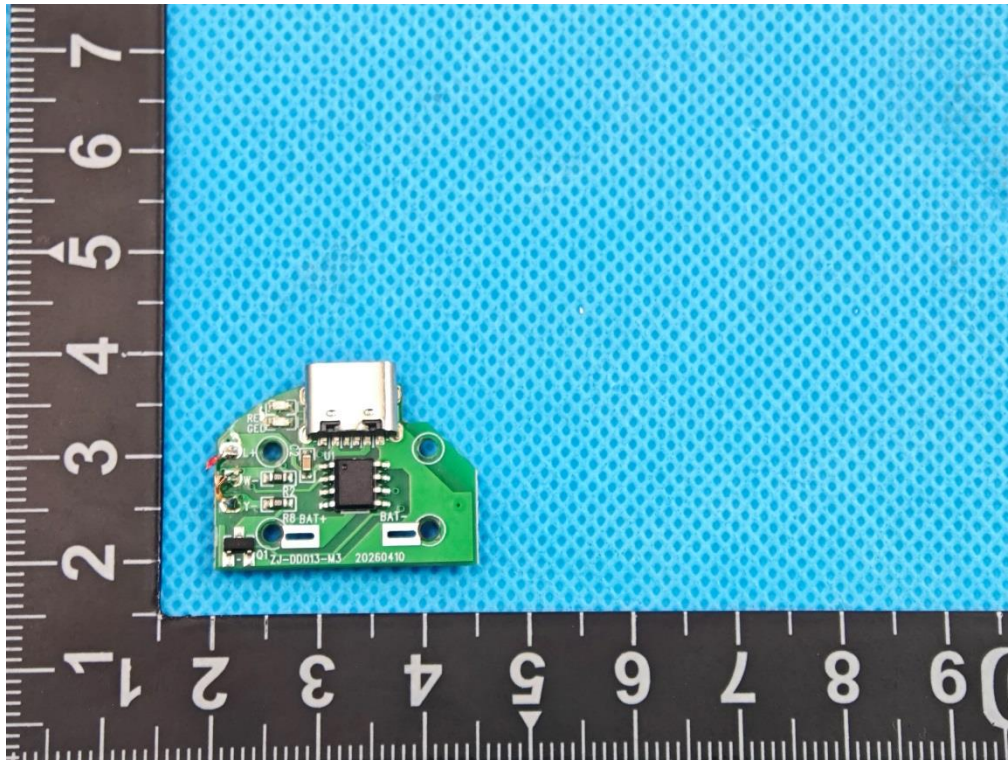


Internal view-1 of EUT

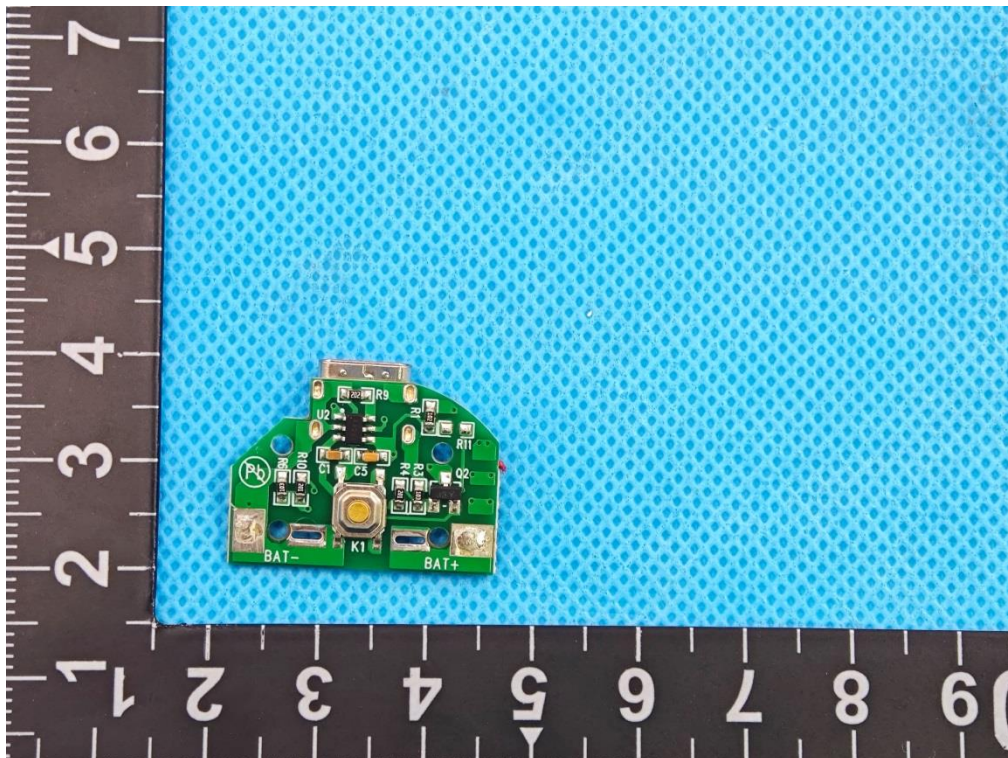


Internal view-2 of EUT

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

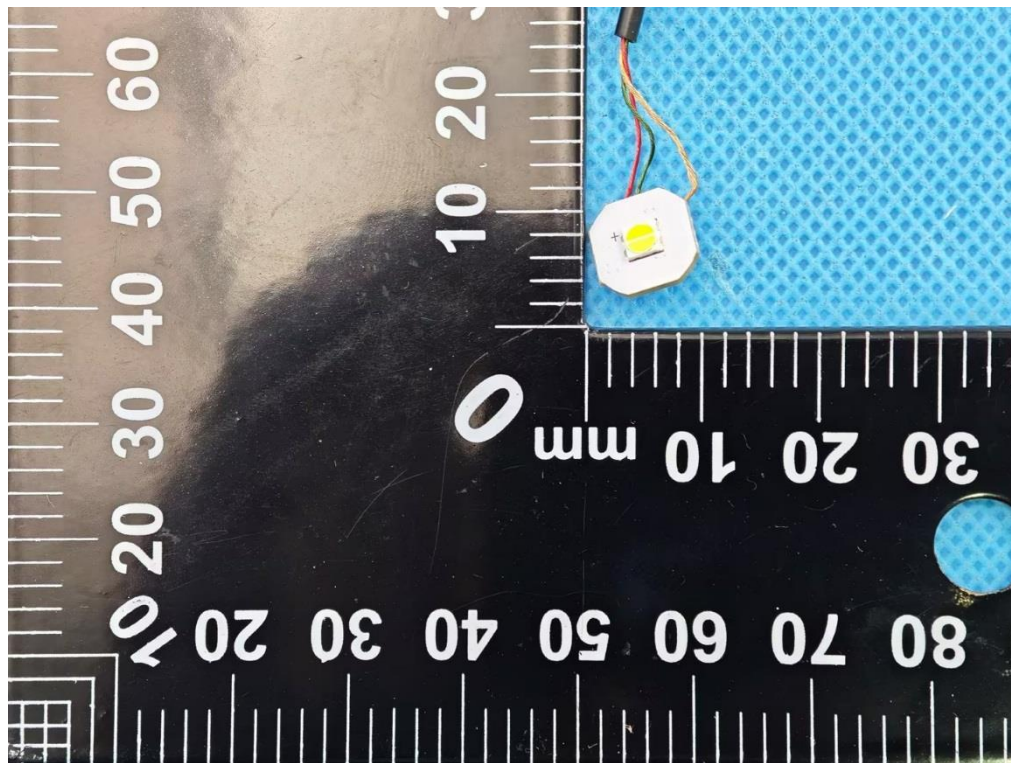


Internal view-3 of EUT

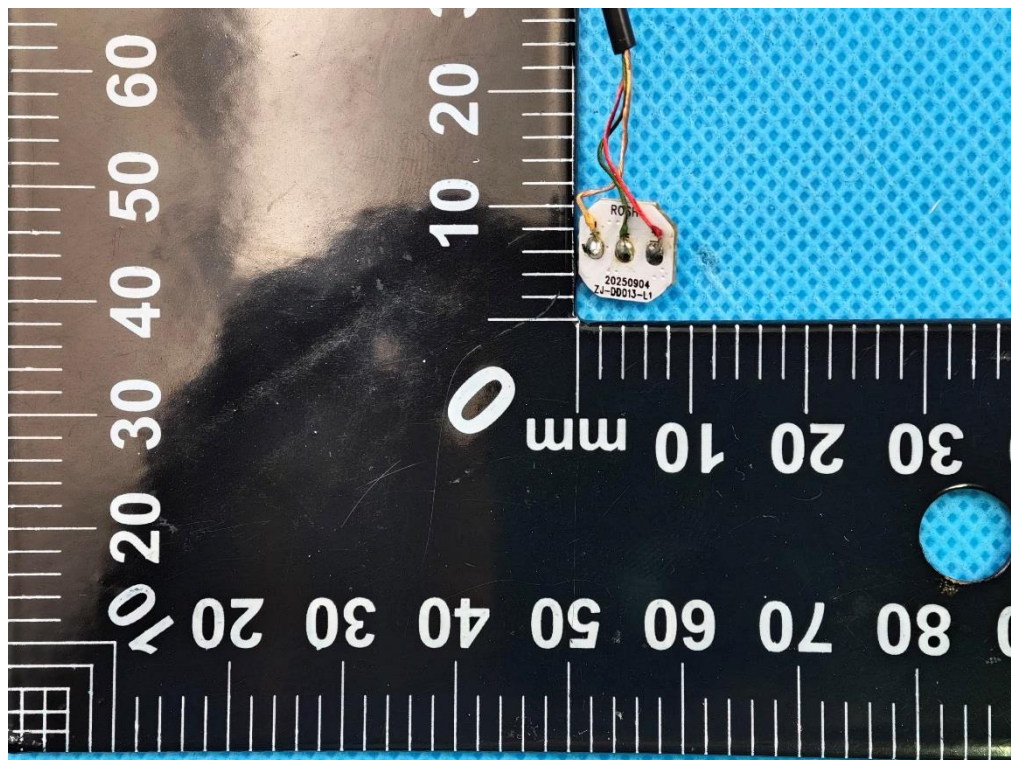

Internal view-4 of EUT

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

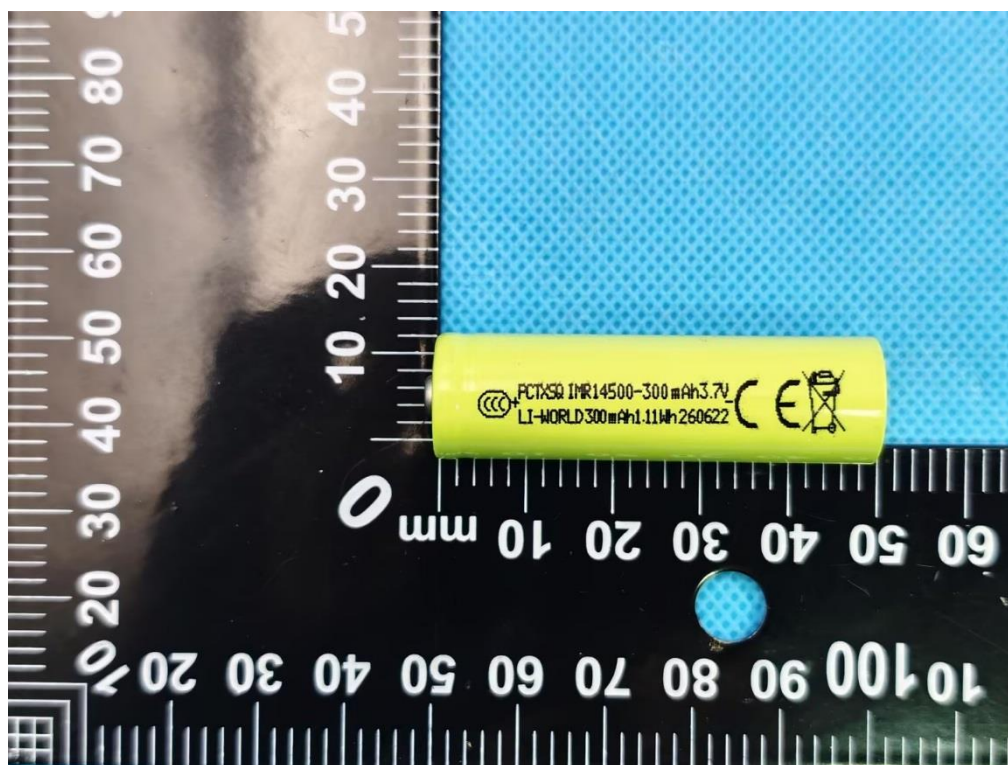

Battery view of EUT

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

## Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

**----End of Report----**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>